

APPENDIX A

Review of 2008 OSRP Action Plan

APPENDIX A

Open Space and Recreation Plan Update Review of 2008 Action Plan

Action Item #	Met?	Keep in 2017 OSRP?
# 1	Yes	Keep
# 2	<i>Yes, partially</i>	Keep
# 3	Yes	Keep
# 4	Unsure, requires follow up	Review
# 5	No	Keep
# 6	Yes, but ongoing	Keep
# 7	Yes	Keep
# 8	No	Keep
# 9	Yes, but ongoing	Keep
# 10	Yes, once	Keep
# 11	Unsure, requires follow up	Remove in update process
# 12	No	Keep
# 13	Yes	Keep
# 14	Yes	Keep
# 15	Yes, but ongoing	Keep
# 16	Yes	Remove
# 17	Yes	Remove
# 18	Unsure, requires follow up	Review in update process
# 19	Unsure, requires follow up	Keep
# 20	No	Keep
# 21	No	Keep
# 22	Yes	Keep
# 23	Unsure, requires follow up	Review in update process
# 24	No	Review in update process
# 25	No	Keep
# 26	No	Review in update process
# 27	Yes	Review in update process
# 28	No	Review in update process
# 29	No	Keep
# 30	No	Keep
# 31	Unsure, requires follow up	Keep
# 32	Unsure, requires follow up	Keep
# 33	Unsure, requires follow up	Keep
# 34	Yes, but ongoing	Keep
# 35	No	Review in update process
# 36	No	Keep
# 37	No	Keep
# 38	No	Remove
# 39	No	Remove

# 40	Yes, ongoing	Keep
# 41	No	Remove
# 42	Unsure, requires follow up	Keep
# 43	Yes, ongoing	Keep
# 44	Yes, ongoing	Keep
# 45	No	Keep
# 46	Ongoing	Keep
# 47	Ongoing	Keep
# 48	Ongoing	Keep
# 49	Ongoing	Keep
# 50	Ongoing	Keep
# 51	Yes, ongoing	Keep
# 52	Unsure, requires follow up	Keep
# 53	Ongoing	Keep
# 54-59	Ongoing	Keep
# 60	No	Keep
# 61	Ongoing	Keep
# 62	Unsure, requires follow up	Keep
# 63-65	Ongoing	Keep

APPENDIX B

Summary of Community Survey



MEMORANDUM

To: Bourne Open Space Committee
From: Krista Moravec
Date: April 19, 2017
Re: Updated Bourne Open Space & Recreation Plan Survey Summary
cc: File

At the second public workshop on March 29, 2017, attendees asked if the online survey could be reopened. They would use their networks to encourage additional responses. The Open Space Committee agreed, and the survey link was reactivated for two weeks, through April 14, 2017.

The original memo sent to the Open Space Committee on December 9, 2016 summarizing the original survey results has been updated to reflect the additional responses.

The Bourne Open Space and Recreation Plan (OSRP) Community Survey was administered as part of the Town's OSRP update process. It was available online from October 31 to November 25, 2016. Hardcopies were also available at the Town Clerk's Office, Library, and Community Center. The survey link was posted on the Town's website. The link was also emailed to a various groups asking them to send the link to their membership or post on their Facebook pages. These included Library, Recreation Department, and Police Department. Flyers promoting the survey were posted on the community bulletin boards in Sagamore, Sagamore Beach, Buzzards Bay, Bourne Village, Monument Beach, Pocasset and Cataumet. The survey was also included in the advertisements (*Bourne Enterprise*) and promotional materials for the Public Workshop held on November 16th.

The survey was reopened from March 31 to April 14, 2017. Attendees to the second public workshop on March 29, 2017 distributed the link to their networks.

109 responses were received, both online and hardcopy. While this is a very small sample compared to the Town's population, responses will be viewed in conjunction with input from the first and anticipated second public workshops, municipal staff, and town committees to gauge the weight of the issues and needs expressed by respondents. This synthesis will be part of OSRP.

The following provides a summary of responses.

Question 1: List 3 open space areas, recreation facilities, or places that you and/or your family use in Bourne. (248 responses)

Of the responses received, the following were the top five answers:

- Four Ponds Conservation Area/Town Forest (30)
- Monk's Pond/Cove/Park/Mud Cove (29)
- Cape Cod Canal Park/Bike Path (27)
- Monument Beach and Playground (20)
- Buzzards Bay Park (10)

Many responded generally about local beaches, playgrounds, and walking/hiking trails. The full list of answers to this question is provided in the attachment to this memo.

Question 2: List 3 open space areas and/or recreation facilities that Bourne needs. (205 responses)

Of the responses received, the following were top five answers:

- Expansion of existing bike network (paths/lanes) (32, 12 specifying Bourne Rail Trail)
- Dog park (30)
- Playgrounds, new and improvements to existing resources (14, 2 specifying an indoor playground)
- Improvements to Buzzards Bay Park (8)
- Walking/hiking paths (7)


The full list of answers to this question is provided in the attachment to this memo.

**Question 3: How important is it to you to preserve or acquire:
 (1-least important ... 5-very important) (107 responses)**

- **Buildings and places of historic significance**
- **Open space to meet water and conservation needs**
- **Open space to meet our active recreation needs**
- **Open space for aesthetics and passive recreation**
- **Open space to create a network**


Most respondents thought it was very important/important to preserve or acquire open space to meet water and conservation needs, to meet active recreation needs, and for aesthetic or passive recreation. About half felt preserving historic buildings and creating an open space network very important/important.

**How important is it to you to preserve or acquire:
 (1-least important ... 5-most important)**

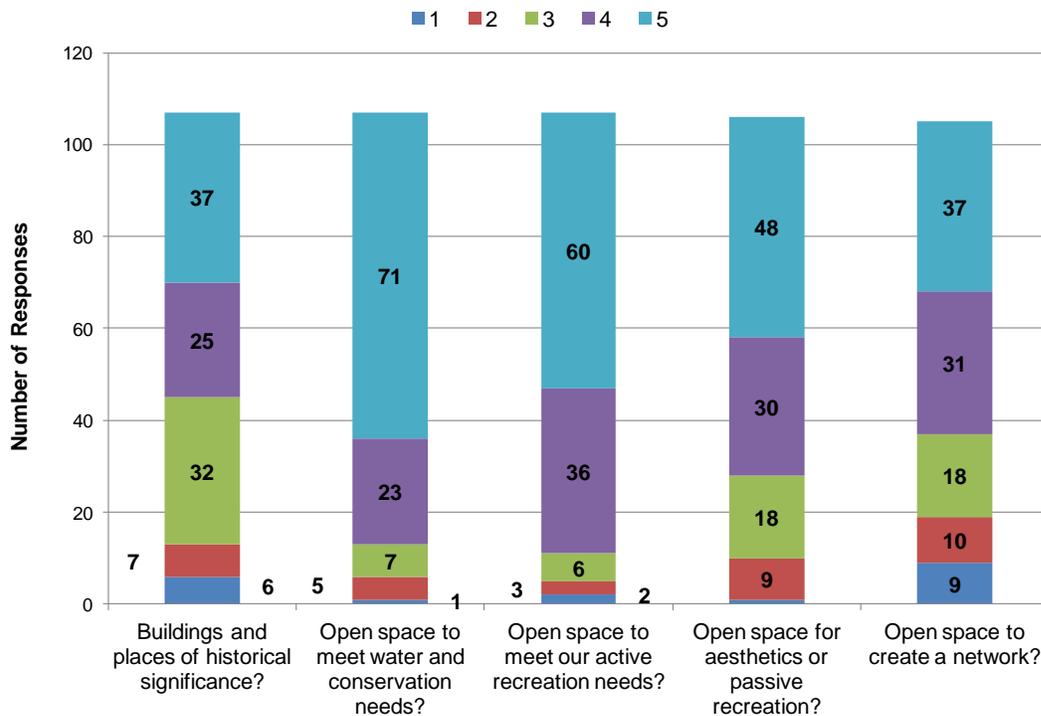

Question 4: How satisfied are you with existing open space and recreational facilities in Bourne for the following age groups? (5-very satisfied 4-satisfied 3-neutral 2-dissatisfied 1-very dissatisfied) (105 responses)

For age groups under 18, respondents were generally neutral or dissatisfied and neutral or very satisfied/satisfied with facilities for those 55 and older.

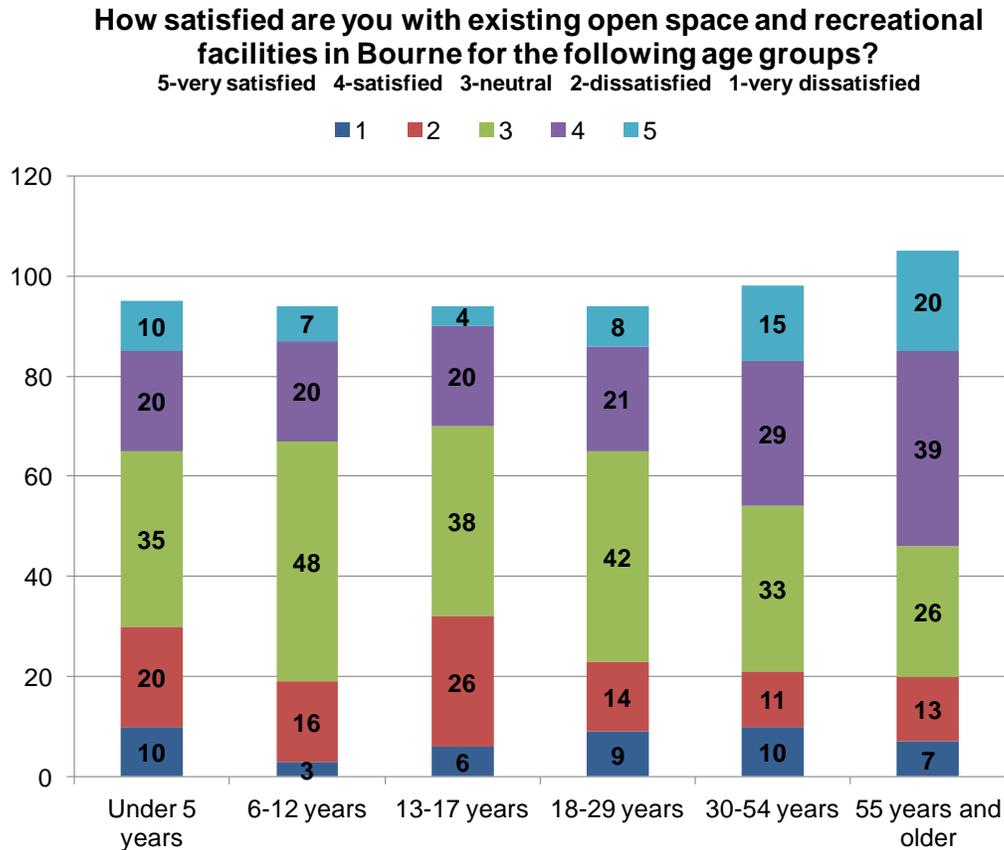


When asked to comment on their level of satisfaction (**Question 5**), some respondents noted that they were not familiar with the programming for younger age groups and therefore did not answer. Respondents expressed the need for more activities and resources for teens as well as residents between 18 and 55 years old. Updating and maintaining existing playgrounds and other open space and recreation infrastructure also impacted level of satisfaction. Other responses provided suggestions and focused on new facilities for youth, non-activity areas for teens, splash pads, ice rink, and indoor swimming pool. The full list of answers is provided in the attachment to this memo.

Question 6: Please check 5 activities or facilities you feel are NOT provided sufficiently. (105 responses)

Almost half of respondents selected dog park and bike paths/trails from the list provided in the survey as not being sufficiently provided in Bourne. A public swimming pool, access to water bodies, smaller neighborhood parks, and community gardens also received many responses.

Please check 5 activities or facilities you feel are NOT provided sufficiently.

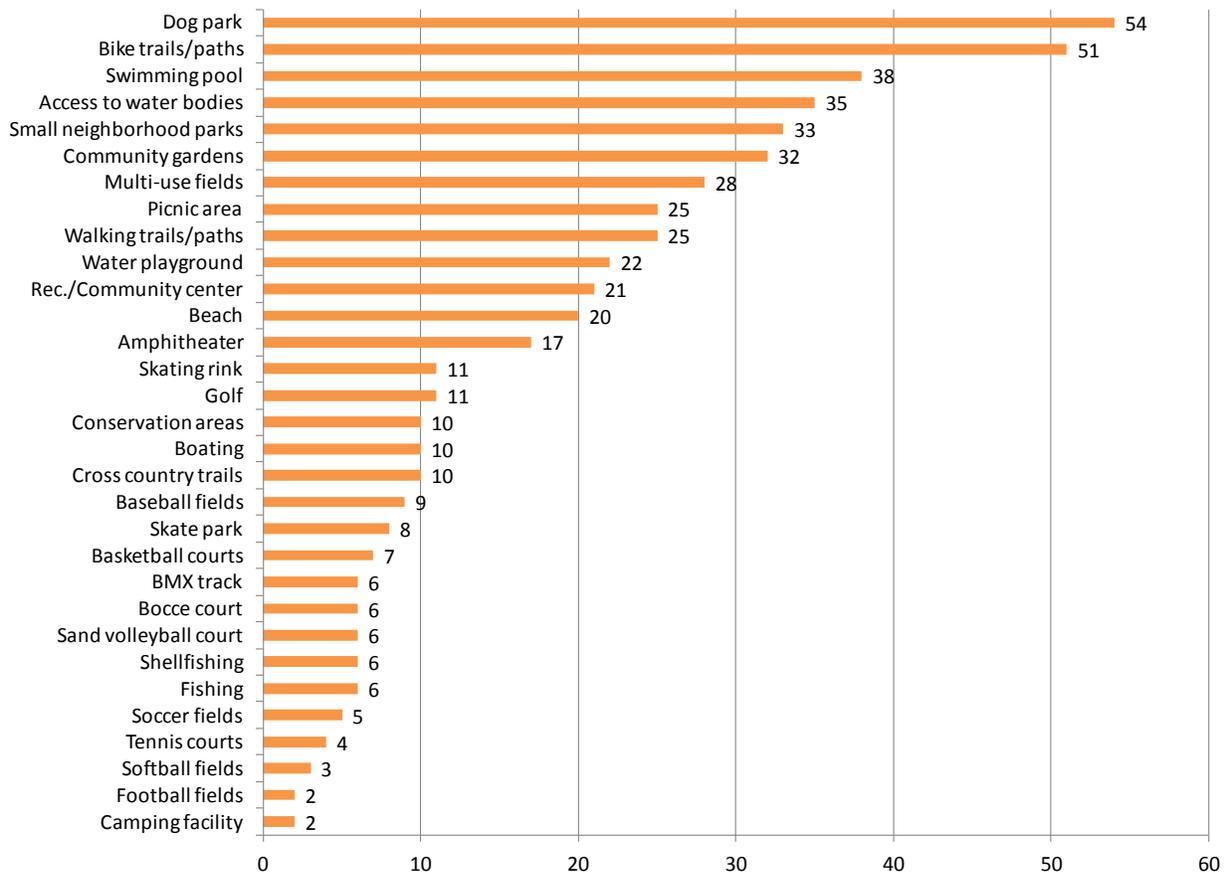

“Other” answers provided were:

- Need more public shoreline access
- I do not feel adequate care is given to the shoreline in simple things such as erosion and pollution control whether it is from people or vehicles.
- Beach yoga and SUP access in summer!!
- Need more sidewalks- especially on County and Shore Rds. Some of the above exist, but are inaccessible (private golf, minimal open times for rec center, pools in other towns)
- Area for dirt bikes to keep them off the walking trails.
- Playgrounds in general


- Indoor soccer, tennis
- Use The Canal To Make Us A Surfcasting Destination
- I wish there were more public beaches not so many private.
- A linear park connecting Gray Gables to Monument Beach to Pocasset to Cataumet is what the rail trail offers. Start by taking down the "No Trespassing" sign.
- I think walking and biking should be considered together.
- Indoor swimming pool
- Splash pad
- Isn't a water park scheduled for BBay Park?
- Sidewalks and crosswalks
- Buzzards bay park if built as planned would be ideal for a picnic area
- Disc Golf Course would be awesome. I play at Borderlands in Easton as well as Marston Mills. Cheap sport that is growing rapidly among all demographics. BEST part is that it can be incorporated into conservation land with little to no impact.
- Want mats for tumbling at Rec./community Center. And bicycle lanes, especially along Head of the Bay Road, Cranberry Highway, Plymouth Lane. These and many others are great roads for bicycling but also dangerous to bicyclists.
- Park with exercise stations
- More parking at Bell Road & at Mashnee Dike beach

Question 7: To preserve open space, would you: (106 responses)

- **Donate land to the Town for conservation and recreation to receive possible tax credit?**
- **Sell land to the Town for conservation and recreation to receive possible tax credit?**
- **Continue to support zoning for open space and recreation preservation?**
- **Continue to accept conservation/agricultural restrictions/easements on land?**



Nearly all respondents said they would continue to support zoning for open space and recreation preservation and a large majority also said they would continue to support the town in accepting conservation and agricultural restrictions and easements. Approximately one third would donate or sell land to the town for conservation or recreational purposes for tax credit.

To preserve open space, would you:

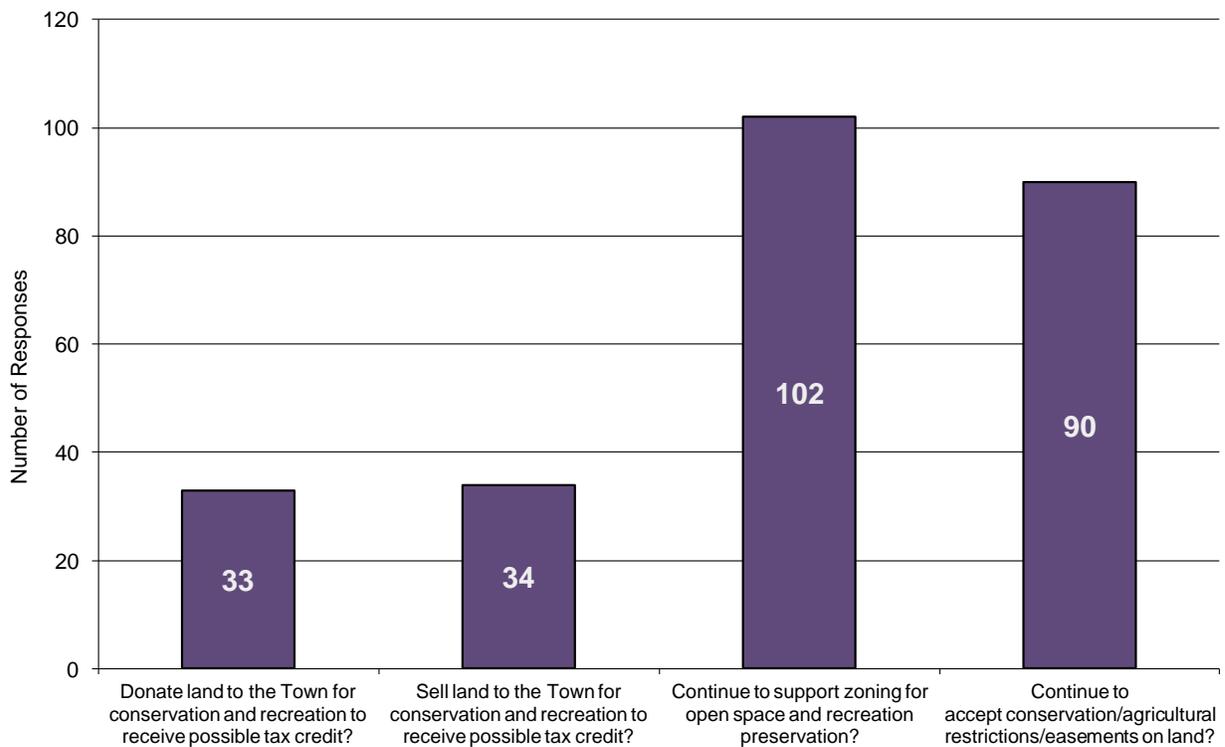


Question 8: How far is the closest open space area or recreation facility from your home? (109 responses) and Question 9: How do you usually get there? (107 responses)

Approximately three quarters of respondents live within a half mile of an open space area or recreational facility. More than half walk and one third drive to reach them. Only 7.5% ride their bike.

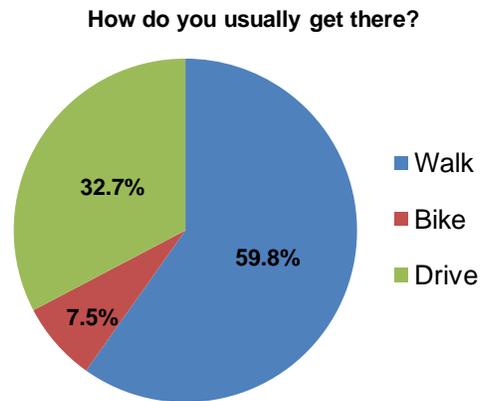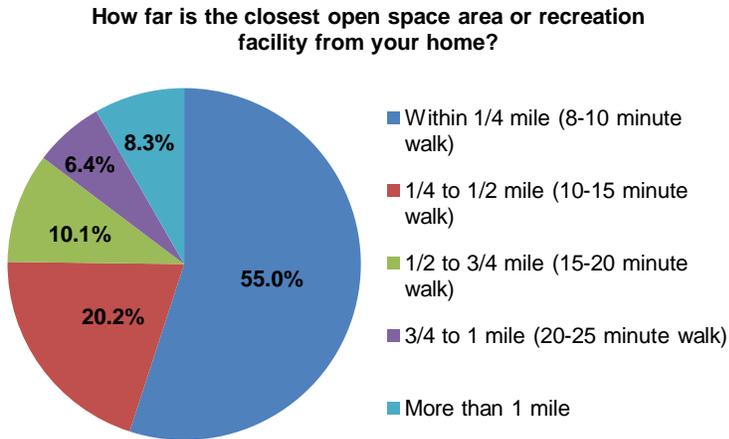

Question 10: How often do you visit open space areas or recreation facilities in Bourne? (109 responses)

Most respondents visit local open space areas and recreation facilities frequently. More than half of respondents visit these places everyday or at least three times a week. Another quarter visit them once a week.

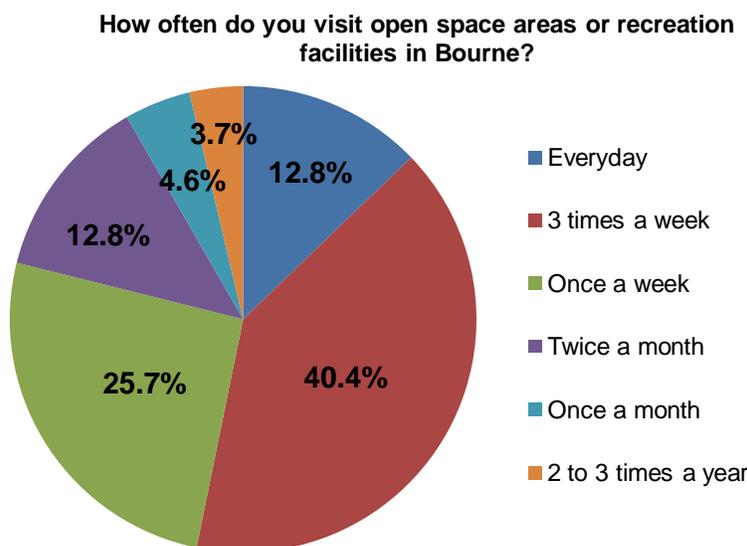

Question 11: What do you like BEST about Bourne's indoor and outdoor recreational experiences and open space areas? (65 responses)

Most respondents appreciate the many walking opportunities along trails and the Cape Cod Canal. Many also cited the abundance of resources throughout town and the variety and choices of resources. The full list of answers to this question is provided in the attachment to this memo.

Question 12: What would you IMPROVE about Bourne's indoor and outdoor recreational experiences and open space areas? (72 responses)

Most respondents focused on offering more diverse programming and activities for all ages and increasing amenities at existing facilities, including parking, sidewalks, and signage. Respondents also commented on the need for maintenance, particularly trails and fields, and addressing dog waste and litter in general at all town recreation and open space properties. Several respondents felt there was a need for new facilities, including indoor facilities (such as a gymnasium, pool, or playground) and a dog park. The full list of answers to this question is provided in the attachment to this memo.

Question 13: What are the most important actions the Town should take in the next 5 years regarding open space and recreation opportunities? For example, should the Town acquire a specific piece of property, save a particular existing resource, initiate a particular program, develop a site, concentrate on maintenance, etc.? (60 responses)

Of the responses, the most common themes were improving maintenance, operations, and management of properties and facilities, continued acquisition of properties for conservation, and building a bike network from the Cape Cod Canal to Falmouth. Other topics that had multiple responses included a dog park, completion of improvements at Buzzards Bay Park, and increased access to the water, including beaches.


The full list of answers to this question is provided in the attachment to this memo.

Question 14: Do you live in Bourne? Question 15: If you live in Bourne, are you a full time or seasonal resident?

All but two of the 109 respondents live in Bourne and of those that answered if they are full-time or seasonal residents (106), all but three are full-time residents.


Question 16: If you live in Bourne, in which part do you live? (107 responses)

Most respondents were from Pocasset, Monument Beach, and Buzzards Bay.

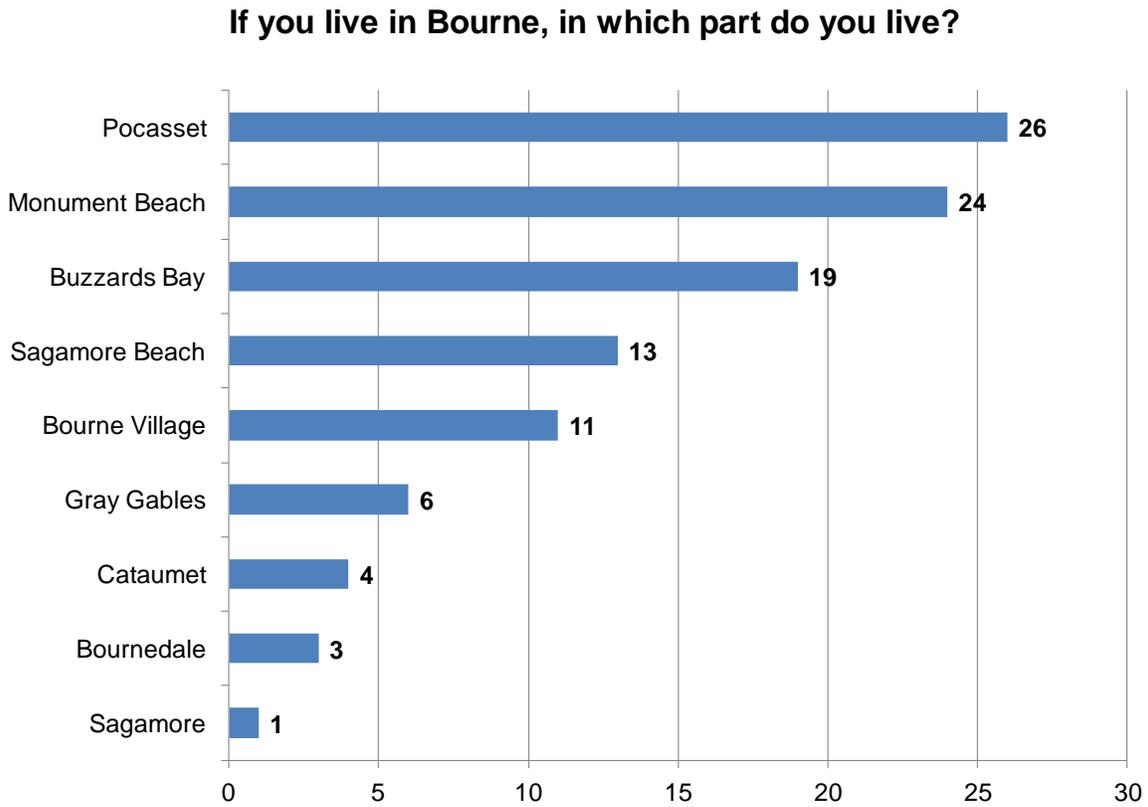

Question 17: How long have you lived in Bourne? (105 responses)


More than half of the respondents have lived in Bourne more than 20 years.

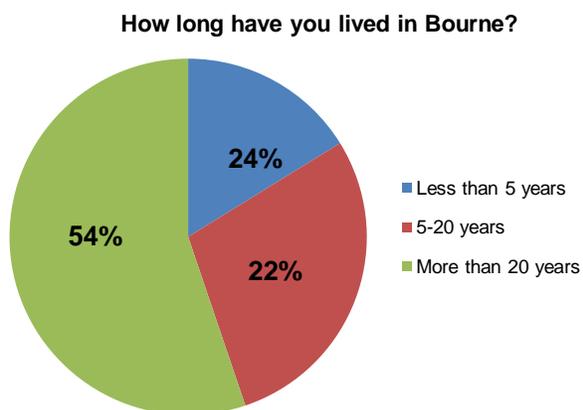

Question 18: Check all age groups that live in your household. (107 responses)

Most households of respondents had individuals between the ages of 45 and 59 years. Nearly 30% had children between the ages of 5 and 14 years or adults between the ages of 60 and 74 years.

Check all age groups that live in your household:

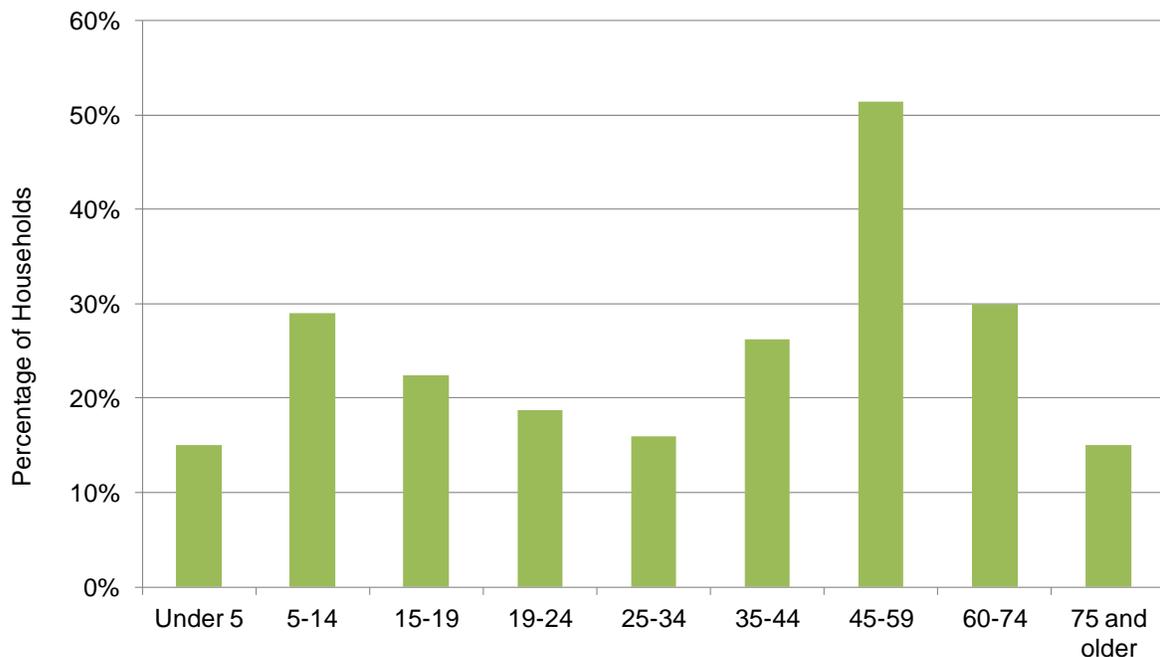

Question 19: Are there any other comments you would like to add about Bourne's open space and recreational opportunities?


- fix signs that have been weathered or vandalized
- We should have better access to Mashnee Island.
- Involve the communities in Bourne to help in the appreciation, use and care of our beautiful natural resources and to understand why it is important to set limitations on public use for protection, like when Sandwich and Barnstable limit vehicle traffic on Sandy Neck to protect nesting birds.
- I haven't played Pickleball but lots of people are talking about it and it would be great to offer at local tennis courts, give people opportunity to try (like me!) and join a league
- Bourne has such great potential, I hope we can achieve that potential. School age kids/teens need more. More to keep them active, engaged, proud to be from Bourne.
- We are blessed to have a "free" canal on which to play.
- Sidewalks! Kayak/SUP Access! Parking!

- Thank you for acquiring more land over the years.
- Keep up the good work.
- Dog park
- Should not use funds for building upgrade. Open spaces playgrounds only
- Swimming program/lifeguards at Mo Beach are going downhill fast. Rec Director (PUBLICLY) treats those kids poorly and it shows in their work ethic/desire to please her/willingness to return the following summer.
- I'm thrilled that the town has many trails for Bourne residents. I would like to see more Beach areas where dogs are allowed.
- We are one of the only towns without a municipal golf course. Bourne should make an effort, if we can't have our own golf course, to work with other towns to negotiate a price for non-residents of those towns to play golf. Our taxes are very high and we get little in return except free trash pickup, which I don't find has a lot of value.
- I am very pleased with the efforts put forth to make both recreation and open space such a high priority.
- Don't buy land just because you have the money to spend, focus on recreation for all ages it makes for a healthy and happy community!!!
- Invest in making the spaces nice and look like attention is spent on them.
- Your survey is obviously biased to spend tax dollars. If it is quoted at any point I will make this known.
- We should maximize whatever beach access we have, we're presently a flyover town, the Nebraska of Cape Cod.
- Thank you for your hard work to preserve our lands! (Please approve wind turbines)
- We are happy to be part of a community where our voices are heard and environmental concerns taken seriously. However, we believe wind turbines would be an asset.
- Bourne clearly is committed to open space, which is wonderful. But fragmentation means not all can avail themselves of what is here. Connectivity and multi-use are key.
- the base is an important aquifer. Needs oversight and open space.
- "Keep building. Improvements in Bourne are always nice to see and they are welcome.
- Thank you to the folks getting things done in Bourne. "
- Stop buying Open Space, invest in existing space already acquired.
- It is nice when there are facilities on site that have simple things like trash cans, water bubbler, restrooms, etc.
- Thanks for getting public input!
- Not sure new to town
- A dog beach would be great, or at least going back to dogs allowed October- may. A town owned pool/recreation area- teen friendly areas
- Upgrade and increase the parks and recreation!!!
- The town is doing a great job, keep it up!
- Important to take care of what we have...
- We need to continue to preserve these properties, so they become an asset to our local economy and increase our property values.
- think we have a great variety of access for the public.

Question 20: How do you receive your information about parks, recreation, and open space areas and programs? (109 responses)

Most respondents receive information about parks, recreation, and open space areas and programs through word of mouth, the newspaper, or social media.

How do you receive your information about parks, recreation and open space areas and programs?

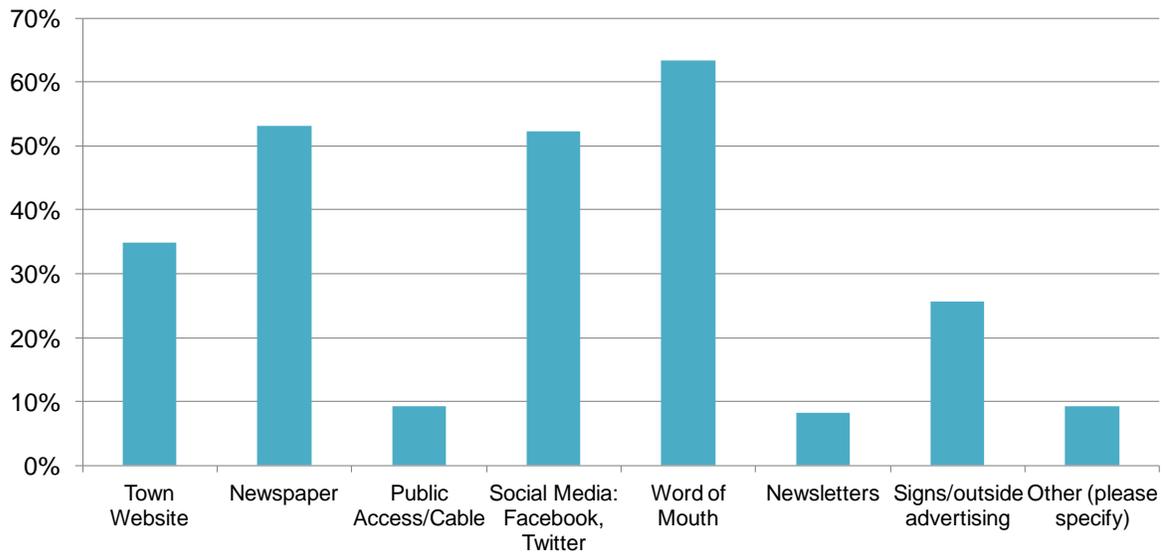

“Other” answers received were:

- Bourne Conservation Trust
- email from school updates
- Bourne Conservation Trust
- I had no idea this was happening until Cooney emailed me directly.
- Google
- Attending meetings
- More/active advertising would be beneficial
- Driving or hiking around & discovering on my own
- Jonathon Bourne Library
- Participate in town government and volunteer on public committees

Bourne Open Space & Recreation Plan Survey Summary

Memorandum

Attachment

The following are responses to open-ended questions to the Bourne Open Space and Recreation Plan survey. Please note that these are “as is” responses and corrections to grammatical and punctuation errors have not been made.

Question 1: List 3 open space areas, recreation facilities, or places that you and/or your family use in Bourne.

1	2	3
BCT Walking Trails	Sports Fields at Middle School	Four Ponds
basketball courts	skateboard park (in past)	walking trails
Bourne Rec Center	Monument Beach	Four Ponds
Lawrence island		
Monks Park in Poc-Mon. Bch	Poc. River	Various shore line for swimming and boating
Monument Beach	Canal bike path	Shell fish beds
Monument Beach shellfishing and Chester Park	Canal bike paths/Buzzard Bay park at railroad bridge	walking trails Monument Beach and Pocasset
Four Ponds	Monks Park	Playing fields behind the school complex
Monument Beach Playground	Four Ponds trails	Mashnee Dike
monument beach tennis courts	high school tennis courts	walking trail on county road
Queen swell park	Queen swell pond	Community building playground
None		
Four ponds/ town forest	All beaches, year round	Pocasset playground-- needs updates!!
Clark Field, tennis and basketball courts	BMS gymnasium	Sagamore Beach
Four Ponds	Bourne Middle School fields	Bourne High track
Lawrence Island	Monk's Park	Cataumet Walking Paths
Four Ponds trails	Monument Beach	Cataumet park near post office
Four Ponds Conservation Area	Clark Field tennis courts/playground	Carter-Beal Conservation Area
school sports fields	perry woods trails	public tennis courts
Monks Park	Bassetts Island	Town Forest
Canal walkway		
Monks Cove	Three Sisters	Squeteague / Lawrence Island
Cataumet Greenway (BCT)	Red Brook Pond and Spring Hill farm (BCT)	Four ponds and adjoining areas
Monk's Cove	Mashnee Dike	Back River
Cape cod canal	Path at key stone place	
Clark park	Sagamore Beach	High school fields
Waterways	Walking trails	

1	2	3
Sagamore Beach	Railroad bridge park	Canal bike path
Carter Beal Nature area/trail	Bourne Community Center Playground/Adjoining playground	Clark Field Playground
Four Ponds	Monks Cove	Clark Field/Playground
Beaches	Buzzards Bay Park	Bourne Scenic
Clark Field		
Walking trails	Beaches	Playgrounds
Four Ponds	Monks Park	Bourne Sisters
Buzzards bay park	Community building	Monks park
Gray Gables Beach	Dike Beach	Community Center
Monk Park		
Monument Beach playground	Four ponds	Town forest
tennis court	basketball court	
Clark Park.	Hoxie School	Monument Beach Baseball Field
Library	Community Building	Monument Beach playground
Library	Community Building	Monument Beach playground
Library	Community Building	Monument Beach playground
Canal area	Monument Beach	walking trails
Trails for walking	Buzzards bay park	Track at the high school
Monks park	Cape Cod Canal	Four ponds
Canal service road	Sagamore beach	Hiking trails
Clark Field	Monument Beach baseball field	Community center
Canal path		
Shore Road Monks Cove	Shore Road Redbrook Pond	Redbrook Harbor Road Trails
The canal overlook near town hall	Clark field playground	The park along the herring run of Herring pond Rdbeyter
Cape Cod Canal service road	Playground behind senior center	Tennis courts behind Town Hall
Baseball fields	Tennis courts	Walking trails in carptaumet
Cape Cod Canal	Sagamore Heghts	Monument Beach
Monks Park/Little Bay	Town Forest	Four Ponds
Monument Beach	End of Eel Pond Road	Canal walking path
Path along canal	Burtonwood conservation area	Monument Beach
Four Ponds	Leavy area	Four Sisters
Bourne Town Forest/Four Ponds	Monk's Park	Hen Cove Beach
Perry Woods	Monk's Park	Four Ponds
children playground	skate park	
Monks Park	Beach	BCT Trails
Canal Bike Path	Town forests	
beaches	Four Ponds	Monk's Pond
Head of Bay (Henshaw)	Area by Keystone	Four Ponds
Monument Beach & Monument Beach Park	Four Ponds	Monks Park aka Mud's Cove
Buzzards Bay Park	Monks Park	Five Ponds
Barlows Landing Boat Ramp	Walking Trails, Barlows Landing Road	Monument Beach
beaches	canal walk	marina

1	2	3
buzzards bay park	canal	park near monument beach
Monk's Park	Four Ponds Conservation Area	Bourne Sisters Woodland
Leary property	Four ponds	Mud cove
Ball fields		
Buzzards Bay Park/ Canal path	Monk's Park	Pocasset walking trails
Buzzards bay park	Town forest	Town marinas
Beaches	Bourne Park in Buzzards Bay	Benches with W-FI hookups
Buzzards Bay Park	Electric Ave Beach	Gallo Ice Arena
Bourne Community Building	Three Sisters Woodland (BCT)	Little Bay and Monks Park (BCT)
Monument Beach	Four Ponds Conversation Area	
Four ponds	Three sisters	Monks cove
Head of the bay walking trails	5 ponds	Canal
Cape Cod Canal conservation area	Buzzards Bay park	Pocasset River kayak areas
Four Ponds	Monks Park	Canal bike path
Railroad bridge parking area	Canal walking	Electric Ave beach, MMA campus walking
Little a Bay Traild		
The canal	Monks cove	Town forest/4 ponds area
Buzzards Bay Park	Clark Field	Monks Park
Monk's Park		
Monument beach playground	Gallo ice arena	
All the playgrounds	All the trails(Love the BCT trails)	Beaches :)
Baseball Fields	Queen Sewell Park	Community Center
Gray Gables Beach	Monks Cove	
Cape Cod Canal bike-walkway	Buzzards Bay Park	Lyman Reserve
Canal bike path	Beaches	
The playground at Monument Beach	The playground at the Cataumet post office	The soccer fields at Bourne Middle School
picture lake	playground in Pocasset	four ponds
Aptuxet Trading Post area	Monks Park area	Bassett Island
Canal walkways	Beaches	Pocasset playground
Scussett Beach area	Main St., near Canal Chamber area	walking along Canal road between R.R. bridge & Sagamore bridge area
Four Ponds Conservation Area	Bourne Sister's Woodland	Bourne Back River Area
Bourne Summer Rec. Day Camp	Bourne Community Bldg gym	Canal Crossways access trails
Monks Park/Little Bay	Town Forest	Four Ponds
canal crossways	monks park	

Question 2: List 3 open space areas and/or recreation facilities that Bourne needs.

1	2	3
Water Playground	Skate Park	Biking Path
additional playground	workout space with weights	additional space for groups over 40
More baseball fields	Continue to have dog-friendly spaces	Bike trail
Bicycle rail trail		
Board walk at Monk's Park, erosion mitigation to save and protect marsh that has been severely degraded in past few years. stair access to Poc River	Stairs to Pocasset River for kayak access at large lot near river.	Side walks for walking
Bike path		
Rail trail bike paths	YMCA closer to Bourne	Pickle ball court
An all ages playground.	Walking/running paths away from car traffic	A gym. Something like Gleason Y
Beaches accessible to residents	Indoor swimming pool	Bike path
Dog park	Splash pad	Accessible playground
Children's park	Park to read, enjoy nature	
Cleaned up/ updated playgrounds	More water access for kayaking/ paddle board needs	Exercise/ obstacle sort of course to encourage exercise and strength for kids and adults.
dog park	more tennis and/or pickleball courts	dog park
Bicycle path	Better maintained fields	Safer walking and biking routes
Update of Buzzards Bay Park		
Updated playgrounds	Expanded bike path	Updated baseball/soccer field
More Open Space, especially connected with existing open space.		
Formal Kayak access areas with free un-stickered parking	Dog park with free un-stickered parking	More public water right of ways with parking
Transit marina		
More baseball fields	Open skate when children are not in schools	Safe bike path separate from Shore Road
Just as much open space as possible		
Better public kayak access to Back River	Upgrade canal access on Cape side	Bike trails including Rail Trail
Dog park	Dog park	Dog park
Dog park is a priority!		
Access to bay		
Dog park	Updated/maintained playground equipment	
Bourne Community Center	Clark Field	Canal bikepath/trails/rest areas

1	2	3
More access to community building/gym space	dog park	community garden/CSA opportunities
Dog Park	Bike Path	
Dog Park		
Dog park	Dog trails	More beaches
Mashnee access	Better boat ramp at Monument Beach.	More salt water access / parking.
Dog park		
Rail Trail	BBay Park	
Dog Park		
DOG PARK	OUTDOOR SKATING RINK	
Open space is good anywhere.	A youth sports complex.	
YMCA/ boys/girls club	Bike rail trail	Finish Buzzards bay park
Indoor track for the elderly to walk in bad weather	Indoor soccer facility	Sidewalks!!!!
Replacement of the park in Buzzards Bay	Dog park	More boat slips
Picnic and gathering areas in buzzards bay	YMCA	Pickleball courts (separate from tennis courts)
A battery of fields together with working bathrooms	Splash pad	
None		
Mashnee Island Dike	Scraggy Neck Dike	Lawrence Island
Better area near the RR bridge maybe with a playground	Signage on the trail along Herring Brook to teach about nature	Preserving other areas against rampant development
New playgrounds	Turning railroad into bike trail	Indoor rec for soccer, tennis
Fishing Piers On The Canal	Mass Influx Of Foliage Trees Along Canal For Tourists	Build Fak Hill, Get A Snow Machine, Ply Christmas Music, Become Sledding Mecca
Indoor Swimming Pool fro lap swimming	Picnic areas	More bike trails
more open beaches	safe walking trails	
more access to beached	woodland with hiking paths	
dog park	playground in Bourne Village	
dog park		
Dog park	playground	
dog park		
Bourne Rail Trail	Real restroom at ball parks	Real recycling
Connecting bike path canal - Shining Sea	Better maps of town conservation paths	
Bike path - Bourne Rail Trail		
state owned beach	at end of Tower Lane given up by town in 1950	
Indoor Tennis/ Volley Ball Courts	Turf field with lights	Rock climbing wall, paintball, roller skating (Rec Building)

1	2	3
Splash pad	Basketball Courts	Bike paths
Updated Launch Ramp, Monument Beach Marina	More Parking, Barlows Landing Ramp	Improvements to Public Ramp, Red Brook Harbor
a year round place for children/community to gather		
Bike path connecting Falmouth to Canal	Bike lane or off road path along County Rd for better access to schools/village	
New playground @ Chester park		
Protect available open space	Have enough recreation areas	
Affordable gym i.e. YMCA	Expand Cape Cod Rail Trail	Dog park
Splash pad in buzzards bay park	Synthetic ice rink in the winter	Pavilion in buzzards bay park
Area for outside socializing for the senior citizens population	Picnic/ Parks & Playgrounds areas for families with handicap	Dog parks ... Please
Open Air Market	Outdoor Theater	
More tended/mapped trails for Bourne's open spaces		
Dog Park		
All tennis courts lined for pickleball		
Disc Golf Course	Outdoor Pool	Ice Rink
Play area/fields	Dog park	
A bike path	BuZZards bay park more for families	Main St REHAB
Bike trail No. Falmouth to Canal	Dog Park	
Dog park	Town pool/recreation area separate from senior center	Outdoor sports facility
Park space	Sidewalks	Indoor track
Public Golf Course		
Bike path/trails	Cleaner/safer playgrounds on cape side of canal	
Dog Park		
Rail Trail	Revitalized Playgrounds	Community Gardens
Bicycle lanes along scenic roads, many too narrow and dangerous to bicyclists.	Mats at Rec./Community Center in the gym.	
Bike path connecting canal to shining sea	Park with exercise areas	Multi use offroad paths
An indoor play space for children		
Indoor Park for preschoolers in winter	bike paths	
Buzzards Bay park	Accessible playgrounds	Walking paths
park in Bourne village area	park area before entering Gray Gables near VFW	
A nice public beach with facilities	Extend the canal bike path to connect with Falmouth bike path.	Trails for walking by a stream or along the coast.

1	2	3
More coastal access trails	Public swimming pool	Resident Parking for Mashnee Dike
Indoor Swimming Pool fro lap swimming	Picnic areas	More bike trails

Question 5: Comments on level of satisfaction. (How satisfied are you with existing open space and recreational facilities in Bourne for the following age groups? 5-very satisfied 4-satisfied 3-neutral 2-dissatisfied 1-very dissatisfied)

- more space for age groups 19-54 is needed
- natural areas so they are easily used and not degraded by people using them.
- I don't have young children any longer but didn't feel there was a lot available to them.
- There is little to offer on this side of the bridge for winter/bad weather recreation
- Playgrounds all through the town NEED updates or replacements. I'm just waiting for my kids to get a cut from rusty equipment. School age kids have good organized sports, but need space to explore less structured ways of being active. As a mid-30 year old, I would like more access points to put in a kayak or paddle board.
- I usually drive to Falmouth for activities with my children.
- "Bourne still needs more open space for aesthetics and passive recreation.
- There seem to be enough playgrounds/ball fields for younger people."
- Very tough question to answer well. Need to break it up. Do you mean buildings, playgrounds, natural areas?? Each age group wants different things, you can't generalize it.
- Not much for any age group.
- Individual groups have done a good job of updating playgrounds
- Not sure. More is better in each case.
- Good for human recreation. Need for humans and animals besides the canal
- Bourne desperately needs to commit to and develop its infrastructure as it relates to recreation and community functions.
- Unfortunately with open space comes vandalism. Funds need to be set aside to maintain and update these spaces.
- The community center is good for older kids classes and activities, although as a working parent, it's impossible for me to transport my children to any of them. The playgrounds in town are lacking, we usually have to go to Sandwich, Falmouth, or Cedarville for really great playgrounds. (Like the Hedges Pond Rec area, Goodwill Park, the new playground at the end of Herring Pond Road on Plymouth side, etc.) I don't feel like there's a ton of stuff for older kids or even adults to do. Some hiking, but on the Carter Beal area, for example, there is no map or signage. It was rated one of the best hikes on cape cod, yet I always feel I'm going to get lost. The canal is good if you like to bike. But my 8 year old is petrified he's going to fall in, so we don't go often. The area by

the railroad bridge, when complete, should be a HUGE improvement. I always feel like I'm going out of town to do things. And our beaches aren't that great. Town permit doesn't get you on Scusset, I never thought that was fair.

- We need more activities for school aged children aside from competitive sports and vacation week activities. Regularly scheduled activities after school hours, both indoors and outside, would be beneficial to all.
- If we want to attract more young families to keep the town growing we need to offer things they are looking for. Play areas for kids, dog parks, picnic space. Stop catering to the older population of town.
- Bourne has many great trails but the town needs more beach access. Losing the property at Mashnee was a disappointment.
- More purposeful parks would be nice.
- "There's plenty of stuff for kids.
- Little to any beach and water access."
- Not a lot to draw younger people to these areas without a playground
- "There isn't enough for teenagers to do.
- We should have a space for kids to play indoor sports in winter, we have to drive to Plymouth for soccer and Falmouth for tennis. "
- Nice town, needs work, esp. Main St.
- No walking or recreation for older or middle aged
- Lack of an indoor pool and recreational activities for teens and preteens. Open space areas are nice, but need expanding, esp. connecting trails and bike paths.
- I think there's a lot of open space, but there could always be more. The base uses up so much of Bourne's available land.
- More parks for younger generation
- skate park dirty. senior center messy on sides of buildings
- I don't feel i know enough about the needs of kids. Not enough "safe" walking connections for >55 year olds.
- Town of Bourne CPA Open Space Committee is exceptional.
- "Youth sport recreation areas need development and non-sport activity areas for teen's is seriously lacking overall in the town of Bourne.
- Think- ""what can I do as a kid when it's the winter on the Cape/ Bourne?"" Operate from this position. "
- Buzzards bay park is a perfect example of where we should spend money. The idea of a splash pad, winter synthetic ice rink and a pavilion will be great to give Bourne families something to do on the canal in buzzards bay.
- Really not sure what is available. Better publicity and listings needed, especially for static resources that aren't special events. For example, what trails are open to public walking, what recreational areas exist and what does each offer, etc.
- No
- We really need to redo main st!!!! Bowling, theater, small meat market fish market anything to make it look better than a war Zone

- More recreation less open space (wooded area)
- Again, bicycle lanes.
- There may be open spaces I am not aware exist. The tennis court in sagamore could be maintained better.
- Pleased. The more conservation & recreational areas the better.
- Hard to know if we have enough available facilities for activities in various age groups.
- Need more, improved soccer fields and indoor swimming pool.

Question 11: What do you like BEST about Bourne's indoor and outdoor recreational experiences and open space areas?

- they are kept up-to-date
- Open space areas are pet friendly.
- Access to shore, natural environments
- Being in nature, in the woods, at the shore or in the water, swimming or kayaking. Walking paths by public roads would make it possible to walk with out fear of trucks and cars running you over.
- Access to ocean/beautiful views, mixed generation use
- There are many more activities available for kids than there were when my kids were young, but as part of the older group I wise there were more choices
- the beaches
- Somewhere for me to bring my children
- Bike path. Beaches. The number of playgrounds (need updating!!). Options for walking trails.
- Four ponds has a nice walking trail
- Having the skating rink is a big plus. Having all the ballfields associated with the Middle School/High School complex as well as the Cape Cod Regional Tech School is another big plus. The canal walking/biking path is a third major plus for the town.
- Bourne Conservation trust lands, town forest land, and all waterfront access areas- Monks park, back of Pocasset river, Lawrence Island, town forest for cross country skiing and dog walking
- Well kept trails
- Between the BCT and the Town, there are some pretty nice walking areas walking distance from my house. Although privately owned, the cranberry bogs are a huge factor in giving a sense of open space and owner is very generous in allowing people to walk the bog roads.
- Proximity
- Community
- Love the beaches
- I really do like the community center best, I just wish we were able to use it more.
- Love walking trails; dislike trash and dog waste all over them.
- Proximity to my house.
- The trails are wonderful!

- They are not very well maintained. Some of them you can only use certain times if the day.
- I enjoy the peace and tranquility of the many walking trails.
- Views, accessible,
- Community building and high school track
- It nearly always has the backdrop of the canal or ocean.
- That we have them.
- This is a beautiful place to walk in nature. When my daughter was younger (she's grown now) the playing fields, playgrounds and pond beaches were important.
- The soccer fields at BMS
- We have the best walking trail (Cape Cod Canal) around
- Locations
- "Many open space options for hiking.
- Good youth soccer program and community boating program,"
- Free access
- Free access
- Bourne Conservation Trust does a great job.
- That even in a densely populated neighborhood, the open space areas provide habitat for a variety of wildlife.
- trails; walking
- Many choices
- I think that overall, there is an abundance of open space. But they do not all connect easily without cars.
- Preserved open space for the future.
- They are close by and protected.
- Water-related activities are supported by DNR/Harbormaster
- beach
- supports youth activities year round
- I love all of the conservation areas with great walking trails and water access.
- I like outdoor places the best that offer free parking and also restroom facilities such as the Canal path/ Buzzards Bay Park.
- Enjoy the COA
- Community events and classes organized, the fact that we are trying to preserve open space and natural areas.
- They are plentiful and nearby
- New to town so I'm still exploring
- Beautiful canal
- Kept clean
- I Love all the trails and open space areas around Bourne. Great places for hiking
- CPA funds seem to be turning the neglected areas around and providing new spaces
- The trails are amazing, nicely labeled, etc.
- The conservation areas are spread evenly throughout town.

- Walking trails are well maintained and dog friendly.
- I love the many trails in Bourne.
- Pickleball biking
- The beaches and playgrounds
- Walking trails, beaches
- The beauty of the seascapes and walking areas.
- Are beautiful, and feel safe and private. The bike path is a great resource for both walking and biking.
- They are well maintained
- Many nice walking trails

Question 12: What would you IMPROVE about Bourne's indoor and outdoor recreational experiences and open space areas?

- The open space at the train bridge would be completed
- More picnic tables at spaces
- BHS baseball field needs net and stadium seating.
- Bicycle rail trail
- Protect them from cars and make them people friendly to prevent damage. Encourage a care for the environment ethic like National Parks do.
- Use beaches for activities such as beach yoga, volleyball matches, stand up paddle boarding lessons/yoga/clubs
- It would be great to have the rail trail become a reality
- need more lifeguards - dogs are present in the summer on the beaches
- Cleaner
- Fix/replace playgrounds.
- increase parking violation fees for non-residents at local beaches, set specific times for shared use of courts (i.e., when is pickle ball, when is tennis)
- More parking at beach areas.
- More child friendly areas
- MORE SIDEWALKS on County and Shore rd. It's not safe. More parking for all outdoor areas. Need accessible indoor play areas- Rec Center is not accesible most of the time.
- More dog friendly areas, parking near shore access locations (for example, to shellfish on Mashnee Dike)
- Not sure about specific things. Continue acquiring what you can. Help Bourne Community Boating find a permanent home.
- Better biking, nicer access, access to lakes and pools
- Dog park
- I think a dog park is vital. More access for dogs in various areas. It is important to keep trash barrels available throughout the year for waste in all areas.
- Both quantity and quality. I like the idea multi-use spaces, with nature trails/areas combined with playground/park or other structures/buildings. I wish we had a YMCA or pool in town as well.

- Clearer trail markings/mapping in Four Ponds. Need more access/programming for youth activities.
- The area needs to be more multi purpose.
- Get with the 21st century. Update websites, get on fb, connect with the community in modern ways!
- There are not enough places for young adults to recreate. A place with pool tables, table tennis and basketball open gym, etc are needed for young adults, especially in the winter.
- More freedom to use these areas
- Outside areas are not at all dog friendly.
- I think Bourne should have an outdoor "sports complex". More time for public skating should be available year round. Most hours are when children are in school.
- Update Gallo, increase use of community building Gym. Add YMCA boys girls club
- Less environmental restrictions on open space when trying to use them for recreational purposes. More multiuse fields and indoor spaces. Rail trail !!!!
- Developed park with trees on buzzards bay park. Work with schools and pta on exposure to hiking trails. Would love for bourne to have a YMCA with a pool.
- More space and parking
- More of them? Sufficient nearby parking?
- Line the canal with fishing piers, advertise, make us a fishing destination
- Now grass more
- More and better soccer fields are needed, esp. ones that can be used at night. An indoor pool is needed. Need connecting trail between open spaces and more bike paths.
- keep up great work!
- You are doing great work! Having just moved here, we appreciate your awareness, concerns and plans for the future.
- Playground for Bourne Village; Dog park each side of the canal
- A dog park would be great. Other targeted activities/programs (similar to Falmouth Rec Center's offerings for both youth and adult programs) would be wonderful.
- maintenance of trails
- reduce litter
- I am also not sure of what is open to the public or when. Also not sure about what some pathways connect to. Most of all I would love to see the bikeways connect the canal and Shining Sea.
- athletic fields need better maintenance. Middle school fields poorly maintained.
- Just keep it up.
- A roofed sports center/ rec center is what Bourne really needs. It could be used for organized sports or pick up leagues and converted to social events such as dances and parties. Keep it simple. It doesn't have to be like Jungle Plex located in Plymouth, MA. It could consist of 1 tennis court, 1 volleyball court, a small boxing gym, a climbing wall with ropes, & a dance hall/ function room for teens.
- Allocate more CPC money for recreation

- More facilities outside Buzzards Bay
- community gymnasium should be open more
- I wish there were more connectivity throughout the town for biking/walking. County road in particular would really benefit from a bike lane or off-road path so kids could walk/bike to school or to the library.
- More focus on ages 13-54. There are many opportunities for children and elderly, but the in between is lacking.
- Actually have things for people to do, not just acquire land.
- more programs for seniors
- Community center seems more restrictive in use compared to when I grew up and used the facility.
- Clearer outline of what facilities exist and what is available at each, maps to trails and areas open to public.
- We need a dog park
- Step into the 21st century
- New to town, still observing and exploring
- Keep them cleaner the walkway along the bypass needs cleaning up trim bushes etc. and keep the beaches cleaner, rake them enforce no smoking sweep the stairs! Also trash bins along canal for doggie poops and trash!!! And more benches along the canal
- Change rail trail to a bike path
- Keeping teen areas & senior areas separate- every time I've tried to have teens at the community building older people get upset with the noise level. Not a good mix
- Keep updating and expanding
- The community building and recreation department do not offer nearly enough services for all residents. Look at offerings in surrounding towns
- The community building needs more COMMUNITY. Ive been there with my 2 year old son while my daughter has an activity going on and although theres a kids table to play at there are no toys, coloring, etc
- Town upkeep of ballfields (funding and man hours)
- Small parks should have seating areas
- It would be great to be able to safely bicycle to some of these trails without hazarding safety along the roads.
- exoanded hours on open gym time for kids
- I would love somewhere to play inside with the kids in the winter.
- We need to support parents of preschoolers with play facilities, meeting places for cold weather mos.
- More MAINTENANCE against invasive species!! I see too often areas that get set aside from development, but then lose ecological integrity without proper care. Once lost, it can never be regained. Like the Knob in Falmouth (not Bourne), or the increasing Phragmites in Bourne Back River area, or oriental bittersweet along the canal. Also, I don't know if it is possible, but as a non-dog owner, it would also be nice to have certain

trails where dogs are not allowed, & a way to enforce it. I know that this is highly contentious.

- Better parking and better access for disabled and elderly.
- Trails connecting open space lands. Indoor lap pool.

Question 13: What are the most important actions the Town should take in the next 5 years regarding open space and recreation opportunities? For example, should the Town acquire a specific piece of property, save a particular existing resource, initiate a particular program, develop a site, concentrate on maintenance, etc.?

- initiate more programs
- Figure out how to manage the baseball fields for all interested parties, particularly now that HS field will potentially have significant conflicts with residents of Coady School residences. Also, the boat ramp at Monument Beach needs work, and a plan had been drawn up several years ago. Where is the upgrade? We should increase beach fees and have a way to pay each day at the beach so tourists have access while the town gets revenue.
- Promote rail trail, acquire coastal access
- They should protect Monk's Park, consider a stairway to the Pocasset River on the east side of Shore Rd. near Singing Bridge and inventory all possible areas for protection and use.
- Preserve/maintain/make public accessible what has been acquired and seek additional parcels
- Rail trail. Support a Y type facility more locally
- acquire more property if available
- What's happening with the park in buzzards bay by the railroad bridge?? Water park? Also, the piece of land next to the singing bridge in pocasset- does the town own that? Lots of possibilities with that land.
- acquire as much as possible. Although, honestly, it's all for naught if no one starts planning for town-wide sewer implementation.
- Concentrate on improvement and maintenance. Buy the land that may become available near the water district.
- More open space, especially connected to existing open space to create larger parcels.
- Create formal kayak launch areas, with free parking, at the Pocasset River ACEC huge parking lot. Better attract watersports tourism. We are VERY tourist un-friendly with our water access, very hard to park and get to water without a sticker.
- Develop a plan for improvement and maintenance.
- Concentrate on maintenance
- Rail Trail
- Dog park
- Decide on an available space and establish a dog park. Continue with year round maintenance in all areas

- I'm not sure of the best answer here. I'm far from an expert of the subject.
- Maintenance plans--not waiting for something to fall apart and then need to find money/override taxes/etc.
- Acquire more open space. Too much development is harming the habitats of wild animals forcing them into developed areas/neighborhoods.
- Find land & get the dog park built
- I would like to see the town develop more recreational places for young adults, and to acquire beach access on Mashpee Island.
- The town needs develop a dog park, and finish Buzzards Bay park!
- Ease up on restrictions to make these areas more useful when necessary.
- Acquire the parcel of property at the Bourne Rotary Circle from Stop & Shop.
- Finish bb park; Increase trail maintenance
- Create more sidewalks, create synthetic playing fields. Finish Buzzards park.
- Focus and develop outdoor space in each of the villages. Maintain the areas. Include benches and swings and picnic tables.
- Dog park
- Not sure
- Should charge people to park at the canal on the road between the bridges. Bourne could make a lot of money. Or buy a beach sticker to park there.
- Plant 10000 foliage trees along the Canal, it gives us a late season draw in 2045 AD when the trees are big enough
- Fund appropriately and design more lights also utilize solar power
- Develop a better map system showing open space parcels and access points.
- Save existing resources and acquire more as able to do so and approve wind turbines to reduce our electric bills and carbon footprint.
- Save existing resources and raise awareness for the need to preserve and acquire unspoiled land for those who appreciate it and protect it.
- Better signage and trail markers at Bourne Town Forest/4 Ponds. More access to water for swimming, walking and kayak/canoe launch.
- Bourne should not take open space for landfill.
- The most important in my opinion is to connect the Canal Bikeway with the Shining Sea Bikeway to make a beautiful linear park that all Bourne residents of all ages could use. Good for walking as well as biking.
- I don't have access to all the needed information to answer this question. Just keep one thing in mind. Keep the kids busy to keep them off drugs. Nothing to do = drugs and crime. Good luck. Get it done.
- Allocate more money for Buzzards Bay Park
- Update its recreational plan to be eligible for grants; what does the recreational committee do?
- Protect and preserve property
- Try to incorporate more programs for young adults. There are plenty of playgrounds and programs for the elderly.

- Build out Buzzards Bay Park as designed with amenities.
- Continue to develop the area associated with the canal and develop a wider variety of programs for the various times of year and associated with the Buzzards Bay Park
- Work to maintain existing resources and educate the public on what exists, try to promote use of our recreational resources and open spaces to benefit residents
- Develop a site for a dog park
- Not certain
- Make Main St better with small business, get rid of the junk antique stores. Bring in the small town atmosphere!! Make everyone proud to live here!!
- Continue CPA funds but turn the %'s around so recreation is the largest recipient
- The town needs to find land for the dog park.
- Maintenance
- Concentrate on maintenance of all properties.
- Bicycle trails along roadways.
- Work on networking the bike path from Falmouth
- Bike path along RR tracks to connect Falmouth bike path to the Cape Cod Canal.
- Concentrate on maintenance and ecological health. A nice open beach with facilities and parking for Capeside Bourne residents would be really nice. Connecting the bike path to join the Falmouth path would be great too.
- Create a Parks Department with a Director to manage the open space and passive recreation properties we have acquired and are improving for public access.
- concentrate on maintenance

APPENDIX C

Summary of Public Workshops



MEMORANDUM

To: Bourne Open Space Committee
From: Krista Moravec
Date: December 5, 2016
Re: Summary of Public Workshop, November 16, 2016
cc: File

As part of the Bourne Open Space and Recreation Plan Update process, the first of two public workshops was held on November 16, 2016 in the Media Center of the Bourne Middle School, from 7 pm to 9 pm. Approximately 19 residents participated. The workshop started with a brief presentation on the Open Space and Recreation Plan update process and findings around existing environmental conditions. Attendees provided two general comments:

- The Joint Base Cape Cod should not be included when discussing open space and recreation resources because it currently does not allow public access and, due to conditions on-site, will not in the future.
- The need should also take into consideration the large influx of tourists during the summer months because their usage of local resources greatly impacts maintenance and upkeep. It is estimated that the this visiting population is about 30,000 annually.

After questions and comments, attendees were divided into three groups to discuss three questions:

- What is the Town doing well with regards to open space and recreation?
- What is the Town doing that could be better, and how?
- What are new opportunities the Town could pursue to meet community needs for open space and recreation?

For each question, a participant wrote their idea on a sticky-note, which was posted on a board. After everyone had a chance to offer their ideas, the group organized the sticky-notes into common themes. While all ideas would be considered important, the group was asked to help prioritize. Using dots, each participant voted on what general theme and associated ideas should be done in the next five to seven years.

Among all the ideas discussed, common themes emerged from all three groups. For “what are we doing well,” many agreed that the Town is doing a good job at conserving important natural resources for trails, public access to the shore, and natural resource protection, including water quality. The Town is also doing a good job at providing recreational opportunities for the youth, and the Community Center is popular.

For “what could we do better,” there was a need to improve communication to the public about local parks and conservation areas through online and marketing materials as well as on-site. Specific ideas included trail maps and signage. Connecting conservation and recreation properties could also be better through biking and walking trails.

Improved upkeep was also discussed among all three groups as “what could we do better”. Maintenance is a challenge with limited staff and resources for both recreation and conservation areas. Suggested ideas focused on the use of volunteers to promote environmental stewardship in conservation areas and partnering with groups that already exist.

As with the prior question, “What more could we do” also focused expanding public education and communication. There was a need to increase promotion of town resources by publishing materials that describe what activities and resources are available at each property and if public access is permitted. Educational kiosks at each property can also be used. Public education should also focus on what individual residents can do to protect natural resources, including programs to conserve their properties without town acquisition (tax relief programs such as Chapter 61) and personal decisions around maintenance of septic systems, use of fertilizers, and other actions.

In addition to connecting municipal resources through biking and walking paths, the Town should also start to develop integrated networks with neighboring towns. The Bourne Rail Trail was cited as an example. Adding to or improving existing recreational facilities was also discussed, such as lighting for soccer fields, bathrooms, parking, and bike racks.

The following lists individual ideas and ranking for each group.

GROUP 1

What are we doing well?

- Public access to water. (Marketing)
- They are providing an abundance of opportunities for the youth in town. (Youth programming)
- Organizing community recreation opportunities for groups
- Improving resources. (Amount/distribution of green and open space)
- Lots of conservation land/forests. (Amount/distribution of green and open space)
- Protecting open space land. (Amount/distribution of green and open space)


What could we do better?

- **Better maps for town forests and which are open to the public and which are not. (Signage/mapping/information, 10 dots)**
- **Better identification of trails. (Signage/mapping/information, 10 dots)**
- **Signage. (Signage/mapping/information, 10 dots)**
- Providing public access to open space where possible and getting the word out to the public. (Signage/mapping/information, 10 dots)

- Secure more easements to open space and coastal access. (Acquire more easements to open space and water access, 6 dots)
- A big brother/sister program in town. (Mentoring program, 2 dots)

What more could we do?

- **Tell people what they can do on the land, signage/kiosk. (Multi-media communications, 10 dots)**
- **Digital marketing, education, documents (Multi-media communications, 10 dots)**
- Connect public transportation with bike trails. (Bike/hike trails, canal to Falmouth trails, 6 dots)
- We can provide bike/hike trail to connect canal to Falmouth trails. (Bike/hike trails, canal to Falmouth trails, 6 dots)
- Connect Canal Bikeway to Shining Sea Bikeway on railroad track to connect villages, provide walking/biking recreation for all, and protect the fragile wetlands that the railroad crosses. (Bike/hike trails, canal to Falmouth trails, 6 dots)
- Involve schools using Mass Maritime. (Access existing resources for mentoring/MMA, 2 dots)

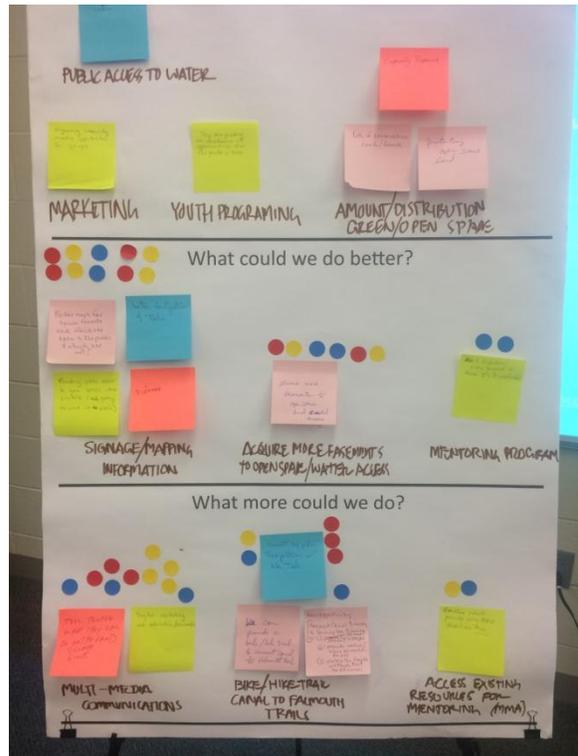

GROUP 2

What are we doing well?


- Dog park – an idea moving forward (New projects in the works)
- Buzzards Bay Park (New projects in the works)
- Inclusive playground opening (New projects in the works)
- Conservation areas and trails (Trails)
- Establishing hiking trail (Trails)
- Improving access to open space (Trails)
- Continuing to purchase open space
- Recreation and the community center
- Parks

What could we do better?

- **Upkeep of open space (Upkeep, 4 dots)**
- **Use of volunteers for trail maintenance (Upkeep, 4 dots)**
- **Partnering with the Bourne Conservation Trust Collaborative (Upkeep, 4 dots)**
- **Establish a “Friends of...” (Upkeep, 4 dots)**
- Signage, wayfinding and education about access, particularly to the beach/coast (Information, 2 dots)
- Improve electronic information (Information, 2 dots)
- Connections between open spaces, particularly along County Road, using sidewalks and paths (Connections, 2 dots)
- More bike trails (Connections, 2 dots)
- Improve parking at trails (Parking)

What more could we do?

- **Multi-town trails, Bourne Rail Trail (4 dots)**
- Complete OSC projects in a timely manner (3 dots)
- Use volunteers for the trails (2 dots)
- Community year-round swim pool (1 dot)
- Take back from state more of beach area and parking at end of Tower Lane, Buzzard Bay at MMA (1 dot)
- Educate residents about tax incentive programs to lower their property taxes and protect open space (1 dot)

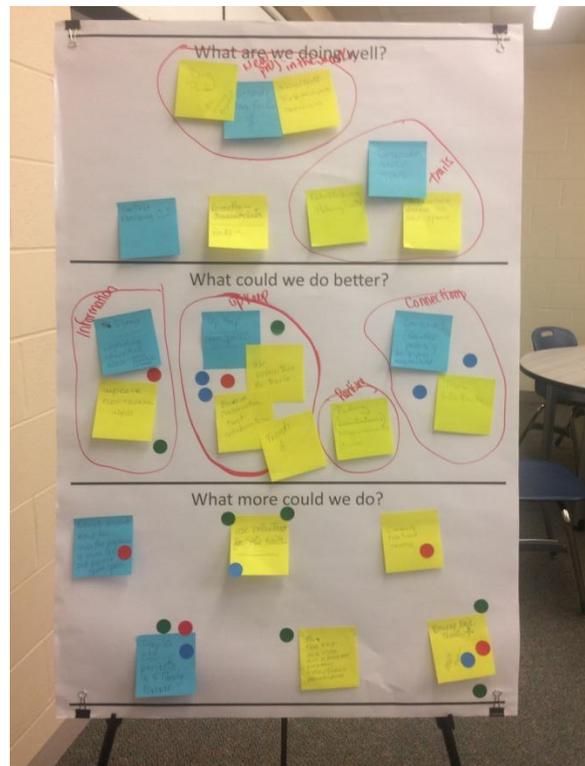


GROUP 3

What are we doing well?

- Waterfront activities (Water)
- Use of the coastal areas, shellfishing, beaches (Water)
- Shellfishing opportunities (Water)
- Water access (Water)
- Preservation of undeveloped lands (Conservation)
- Bourne Conservation Trust properties (Conservation)

- Lots of protected open space (committee has done a good job) (Conservation)
- Nice open space parcels (Conservation)
- Attempting to purchase open space parcels for water protection, trail networks, etc. (Conservation)
- Each village in Bourne has its own recreation area (Recreation facilities)
- Great soccer programs for kids (Recreation facilities)
- Community center (Recreation facilities)
- Schools concentrated in one area (Recreation facilities)
- Continued upgrades and improvements (Recreation facilities)
- Using CPA money for recreation facilities (Recreation facilities)
- Well done community boating program (Recreation facilities)
- No traffic congestion except at rotaries
- Community involvement is encouraged

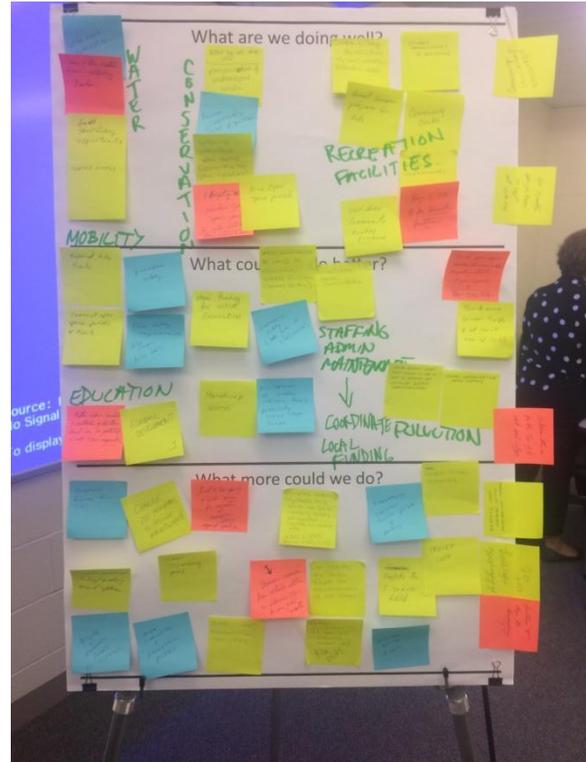

What could we do better? Note: For this question, the group did not dot-vote.

- Expand bike trails (Mobility)
- Connect open space parcels with trails (Mobility)
- Pedestrian safety (Mobility)
- Bike safety improvements, bike lanes, trails (Mobility)
- More funding for recreation (Staffing, admin, maintenance)
- Swimming safety, lack of life guards (Staffing, admin, maintenance)
- More commitment to staff to maintain outdoor facilities, spread too thin (Staffing, admin, maintenance)
- Consolidate some committees (Staffing, admin, maintenance)
- Handicap access (Staffing, admin, maintenance)
- Maintenance of outdoor athletic fields particularly school department fields (Staffing, admin, maintenance)
- Prove beyond doubt that ISWM is or is not a source of drinking water contamination
- Close contaminated septic systems
- Find open space parcels to accommodate open space, recreation and dog park

- Provide more soccer fields and at least one with lights
- Economic development (Education)
- Better inform residents with methods of how their land can be protected without town acquisition (Education)
- Stress that this is for the town of Bourne, not each village

What more could we do? *Note: For this question, the ideas were not organized into common themes and the group did not dot-vote.*

- Connect Bourne Rail Trail
- Integrated bike/walking trail system
- Bike and pedestrian lands on roadways
- Change CPA program to include maintenance
- Indoor swimming pool
- More sidewalks and pedestrian paths
- Look at rezoning of certain areas for recreation and economic development, expand parking
- More indoor basketball facilities
- Complex containing: synthetic turf multi-use field, walking trails, playground, exercise equipment, etc. with lights (mini Forges Field)
- More resources from outside, either reimburse town for use of our assets
- Re-instate the Parks Department for maintenance of recreation areas
- Better facilities at beaches, bathrooms, access, bike racks, etc.
- Identifying shellfish access points and parking
- Lights for one soccer fields
- Trolley loop
- Mountain biking trails
- Better online resources
- Schools that compete with neighboring towns
- Affordable housing, Not 40B
- Facilities for the changing demographics of town



APPENDIX D

Historic Properties

Massachusetts Cultural Resource Information System

MACRIS

MACRIS Search Results

Search Criteria: Town(s): Bourne; Resource Types(s): Area, Building, Burial Ground, Object

Inv. No.	Property Name	Street	Town	Year
BOU.A	Keene Street - Sandwich Road Area		Bourne	
BOU.B	Cape Cod Air Station - Otis Air Force Base		Bourne	
BOU.C	Head of the Bay		Bourne	
BOU.D	Cape Cod Canal Maintenance Area		Bourne	
BOU.E	Camp Edwards - Cantonment Blocks 12 and 13		Bourne	
BOU.F	Lighthouses of Massachusetts		Bourne	
BOU.G	Wing's Neck Light		Bourne	
BOU.H	Bourne Village		Bourne	
BOU.I	Bournedale Area		Bourne	
BOU.J	Main Street Commercial Area		Bourne	
BOU.K	Cataumet		Bourne	
BOU.L	Monument Beach		Bourne	
BOU.M	Monks Estate - Briarwood		Bourne	
BOU.N	Gray Gables		Bourne	
BOU.O	North Sagamore Area		Bourne	
BOU.P	Savery Avenue Area		Bourne	
BOU.Q	Pocasset		Bourne	
BOU.R	Barnstable County Hospital - Thorne Clinic		Bourne	
BOU.S	Barlows Landing Area		Bourne	
BOU.T	Patuisset Area		Bourne	
BOU.U	Sagamore Beach Area		Bourne	
BOU.V	South Sagamore		Bourne	
BOU.W	Cataumet Animal Rescue League		Bourne	
BOU.X	Mystery Lane - Squeteague Harbor Road Area		Bourne	
BOU.Y	Red Brook Harvard Road Area		Bourne	
BOU.Z	Beach - Elm - Chapel Streets Area		Bourne	
BOU.AA	Phinney's Point		Bourne	
BOU.AB	Camp Edwards Ammunition Supply Point Area		Bourne	
BOU.AC	Camp Edwards Range Control Area		Bourne	
BOU.AD	Camp Edwards Firing Ranges		Bourne	
BOU.AE	Bourne Town Hall		Bourne	
BOU.AF	Cape Cod Canal		Bourne	
BOU.15	Buzzard's Bay Freight and Passenger Terminal	Academy Dr	Bourne	1932
BOU.32	Aptucxet Trading Post	24 Aptucxet Rd	Bourne	
BOU.388	Massachusetts Army National Guard Armory	10 Armory Rd	Bourne	1957
BOU.135	People's Church	211 Barlows Landing Rd	Bourne	1890
BOU.35	Wing, Nathaniel House	291 Barlows Landing Rd	Bourne	c 1695
BOU.136	Pocasset First Baptist Church	298 Barlows Landing Rd	Bourne	r 1820
BOU.137	Traveler's Club	314 Barlows Landing Rd	Bourne	c 1910
BOU.350	Sears, H. - McAllister, Thomas House	339 Barlows Landing Rd	Bourne	c 1830
BOU.138	First Baptist Church Parsonage	361 Barlows Landing Rd	Bourne	c 1890
BOU.301	Dimmock, Capt. J. House	386 Barlows Landing Rd	Bourne	c 1887
BOU.302	Phinney, Roland S. House	393 Barlows Landing Rd	Bourne	c 1890
BOU.303	Beckerman, William H. Barn	393 Barlows Landing Rd	Bourne	c 1914

Inv. No.	Property Name	Street	Town	Year
BOU.151	Barlow, Jesse - Barlow, Capt. Lewis N. House	404 Barlows Landing Rd	Bourne	c 1850
BOU.152	Alden, Elijah James Barn	404 Barlows Landing Rd	Bourne	r 1900
BOU.153	Barlow, Capt. Edward W. House	405 Barlows Landing Rd	Bourne	1881
BOU.154	Barlow, Capt. Edward W. Barn	405 Barlows Landing Rd	Bourne	
BOU.155	Beckerman, Rachel S. House	409 Barlows Landing Rd	Bourne	r 1890
BOU.156	Beckerman, Rachel S. Barn	409 Barlows Landing Rd	Bourne	r 1890
BOU.304	Barlow, Jesse House	414 Barlows Landing Rd	Bourne	1887
BOU.305		414 Barlows Landing Rd	Bourne	
BOU.306		414 Barlows Landing Rd	Bourne	
BOU.307	Gibbs, Elisha House	415 Barlows Landing Rd	Bourne	c 1850
BOU.308	Gibbs, Elisha Barn	415 Barlows Landing Rd	Bourne	
BOU.349	Gibbs, Elisha House	415 Barlows Landing Rd	Bourne	c 1800
BOU.157	Lumbard, Thomas House	416 Barlows Landing Rd	Bourne	c 1799
BOU.309	Barlow, Jesse Frederick House	420 Barlows Landing Rd	Bourne	1893
BOU.310	Barlow, Jesse Frederick Carriage Barn	420 Barlows Landing Rd	Bourne	
BOU.311	Barlow, Jesse Bartlett House	424 Barlows Landing Rd	Bourne	1890
BOU.312	Barlow, Jesse Bartlett Garage	424 Barlows Landing Rd	Bourne	
BOU.158	Wicks, Asaph House	425 Barlows Landing Rd	Bourne	c 1870
BOU.159	Wicks, Asaph Barn	425 Barlows Landing Rd	Bourne	r 1890
BOU.160	Wicks, Asaph Barn	425 Barlows Landing Rd	Bourne	r 1870
BOU.313	Parker, Jonathan House	428 Barlows Landing Rd	Bourne	r 1795
BOU.161	Barlow, Capt. William Thomas House	429 Barlows Landing Rd	Bourne	c 1870
BOU.162	Barlow, Capt. William Thomas Barn	429 Barlows Landing Rd	Bourne	r 1880
BOU.163	Barlow, Capt. William Thomas Grocery Store	429 Barlows Landing Rd	Bourne	r 1880
BOU.164	Kendrick, Daniel H. House	430 Barlows Landing Rd	Bourne	r 1820
BOU.314	Kendrick, Charles E. House	435 Barlows Landing Rd	Bourne	r 1840
BOU.315	Kendrick, George A. House	439 Barlows Landing Rd	Bourne	1832
BOU.316	Kendrick, George A. Barn - Workshop	439 Barlows Landing Rd	Bourne	
BOU.317	Kendrick, George A. Garage	439 Barlows Landing Rd	Bourne	
BOU.318	Barlow, Jesse and William Double House	440 Barlows Landing Rd	Bourne	r 1800
BOU.319	Kendrick House	449 Barlows Landing Rd	Bourne	r 1780
BOU.257	Burgess, Arthur C. House	35 Bay View Ave	Bourne	r 1880
BOU.258	Burgess, Arthur Barn	35 Bay View Ave	Bourne	
BOU.83	Tobey, Elisha H. House	42 Beach St	Bourne	r 1880
BOU.259	Dainty, Dr. George W. House	43 Beach St	Bourne	r 1920
BOU.260		43 Beach St	Bourne	
BOU.84	Tobey, Capt. Elisha House	45 Beach St	Bourne	c 1890
BOU.261	Tobey, Capt. Elisha Barn	45 Beach St	Bourne	c 1890
BOU.262	Summinsby, J. Warren - Perry, Ervon L. House	48 Beach St	Bourne	1906
BOU.263	Summinsby, J. Warren - Perry, Ervon L. Garage	48 Beach St	Bourne	1906
BOU.264	Perry, John Francis House	50 Beach St	Bourne	r 1880
BOU.85	Perry, Capt. Salathiel Henry House	61 Beach St	Bourne	1876
BOU.265	Perry, Capt. Salathiel Henry Barn	61 Beach St	Bourne	1876
BOU.395	Tidal Flats Recreation Area Storage Shed	Bell Rd	Bourne	c 1935
BOU.54	White, Mason - Battles, Josh House	6 Bournedale Rd	Bourne	r 1780
BOU.55	Bent, Wilson D. House	9 Bournedale Rd	Bourne	c 1836
BOU.56	Holway, Seth W. Garage	9 Bournedale Rd	Bourne	r 1880
BOU.256	Gardner, George Peabody Bungalow	12 Briarwood Ln	Bourne	c 1900
BOU.177	Burgess, Capt. Benjamin House	11 Burgess St	Bourne	c 1775
BOU.390	Cape Cod Canal Administration Building	Canal Pl	Bourne	1935
BOU.391	Cape Cod Canal Garage	Canal Pl	Bourne	c 1935
BOU.392	Cape Cod Canal Line Shed	Canal Pl	Bourne	r 1945
BOU.393	Cape Cod Canal Warehouse	Canal Pl	Bourne	1937
BOU.351	Base Engineering Maintenance Shop	Cape Cod Air Station	Bourne	1978
BOU.352	Flammable Storage Building	Cape Cod Air Station	Bourne	1985
BOU.353	Warehouse Supply and Equipment Storage Building	Cape Cod Air Station	Bourne	1985

Inv. No.	Property Name	Street	Town	Year
BOU.354	Electric Power Station - Building #023	Cape Cod Air Station	Bourne	1985
BOU.355	Water Treatment - Chlorination Plant	Cape Cod Air Station	Bourne	1978
BOU.356	Armory - Sentry Post	Cape Cod Air Station	Bourne	1978
BOU.357	Electric Power Station - Building 004	Cape Cod Air Station	Bourne	1978
BOU.358	Scanner Building - Building #002	Cape Cod Air Station	Bourne	1978
BOU.16	Cape Cod Maintenance Facility - Storehouse #1	Cape Cod Canal	Bourne	1931
BOU.17	Cape Cod Maintenance Facility - Machine Shop	Cape Cod Canal	Bourne	r 1945
BOU.18	Cape Cod Maintenance Facility - Winch Shed	Cape Cod Canal	Bourne	r 1945
BOU.19	Cape Cod Maintenance Facility - Lumber Shed	Cape Cod Canal	Bourne	r 1945
BOU.20	Cape Cod Maintenance Facility - Carpenter Shop	Cape Cod Canal	Bourne	1938
BOU.21	Cape Cod Maintenance Facility - Boat Shop	Cape Cod Canal	Bourne	1938
BOU.22	Cape Cod Maintenance Facility - Rope Locker	Cape Cod Canal	Bourne	r 1945
BOU.23	Cape Cod Maintenance Facility - Electrical Shop	Cape Cod Canal	Bourne	1935
BOU.24	Cape Cod Maintenance Facility - Paint Shop	Cape Cod Canal	Bourne	1935
BOU.25	Cape Cod Maintenance Facility - Equipment Building	Cape Cod Canal	Bourne	1936
BOU.26	Cape Cod Maintenance Facility - Electrical Shop	Cape Cod Canal	Bourne	r 1945
BOU.266	Brill, George House	6 Chapel Ave	Bourne	r 1920
BOU.267	Brill, George Studio	8 Chapel Ave	Bourne	r 1920
BOU.268	Monument Beach Methodist Chapel	15 Chapel Ave	Bourne	1891
BOU.269	Smith, Angus House	21 Chapel Ave	Bourne	r 1920
BOU.165		357 Circuit Ave	Bourne	r 1920
BOU.166		441 Circuit Ave	Bourne	r 1920
BOU.167		441 Circuit Ave	Bourne	
BOU.4	Bourne High School	85 Cotuit Rd	Bourne	1905
BOU.70	Cataumet Methodist Church	County Rd	Bourne	c 1770
BOU.71	Cataumet Schoolhouse	County Rd	Bourne	1894
BOU.142	Barnstable County Hospital - Administrative Bldg.	County Rd	Bourne	1918
BOU.143	Barnstable County Hospital - Nurse's Ward	County Rd	Bourne	1918
BOU.144	Barnstable County Hospital - Service Building	County Rd	Bourne	r 1920
BOU.145	Barnstable County Hospital - Service Garage	County Rd	Bourne	r 1920
BOU.146	Barnstable County Hospital - Service Building	County Rd	Bourne	r 1920
BOU.147	Barnstable County Hospital	County Rd	Bourne	r 1920
BOU.148	Barnstable County Hospital - Rear Building	County Rd	Bourne	r 1920
BOU.149	Barnstable County Hospital - Garage	County Rd	Bourne	r 1920
BOU.801	Old Bourne Cemetery	County Rd	Bourne	1749
BOU.805	Cataumet Cemetery	County Rd	Bourne	1768
BOU.806	South Monument Cemetery	County Rd	Bourne	1834
BOU.808	Pocasset Cemetery	County Rd	Bourne	1812
BOU.896	South Monument Cemetery	County Rd	Bourne	1834
BOU.40	Hamlin, Stephen House	92 County Rd	Bourne	c 1850
BOU.34	Perry, Cooper John House	111 County Rd	Bourne	c 1750
BOU.33	Ellis - Chamberlayne House	132 County Rd	Bourne	r 1750
BOU.41	Perry, Lewis - Bourne, Capt. Samuel House	191 County Rd	Bourne	c 1832
BOU.42	Bourne, Capt. Samuel Barn	191 County Rd	Bourne	c 1880
BOU.43	Perry, Dea. Elijah House	203 County Rd	Bourne	c 1723
BOU.44	Hamblen, Almira Crocker Ellis Barn	203 County Rd	Bourne	r 1880
BOU.86	Perry, Salathiel H. House	245 County Rd	Bourne	r 1825
BOU.87	Perry, Salathiel H. Barn	245 County Rd	Bourne	r 1850
BOU.88	Perry, Elizabeth Henley House	267 County Rd	Bourne	c 1840
BOU.89	Phinney, George Otis House	401 County Rd	Bourne	c 1800
BOU.90	Burgess House	465 County Rd	Bourne	c 1800
BOU.139	Perry, Howard - Blackwell, William R. House	710 County Rd	Bourne	1825
BOU.347	Wright, Augustus House	720 County Rd	Bourne	r 1845
BOU.150	Barnstable County Hospital - Caretaker's Cottage	884 County Rd	Bourne	r 1920
BOU.72	Christadelphian Chapel	930 County Rd	Bourne	1940
BOU.300	Walker, C. F. House	990 County Rd	Bourne	1793

Inv. No.	Property Name	Street	Town	Year
BOU.73	Phillips, Enos Burt House	1122 County Rd	Bourne	c 1870
BOU.74	Phillips, Enos Burt Barn	1122 County Rd	Bourne	c 1870
BOU.78	Swift Barn - Crossways Barn	1170 County Rd	Bourne	r 1850
BOU.79	Swift House	1170 County Rd	Bourne	1742
BOU.75	Snelling, Rev. Joseph House	1235 County Rd	Bourne	c 1800
BOU.76	Swift, George A. Barn	1235 County Rd	Bourne	c 1870
BOU.77	Jenkins, Alden House	1325 County Rd	Bourne	1785
BOU.27	Crowell Farm	31 Crowell Rd	Bourne	c 1690
BOU.91	Douglas, Gov. William Lewis House	20 Douglas Ave	Bourne	r 1880
BOU.92	Packard, Frederick - Fields, Fred Jr. House	23 Douglas Ave	Bourne	r 1880
BOU.270	Chisholm, Timothy House	11 Elm Ave	Bourne	r 1880
BOU.271	Perry, Harry E. House	12 Elm Ave	Bourne	r 1880
BOU.272	Reynold, Lucy B. - Neal, Harry House	16 Elm Ave	Bourne	r 1880
BOU.273	Coady, Kempton J. - Brooks, Frank House	22 Elm Ave	Bourne	r 1920
BOU.274	Tobey, Levi House	23 Elm Ave	Bourne	r 1915
BOU.93	Perry, Ezra House	2 Gaffield Ave	Bourne	r 1880
BOU.320	Hawes, Edward S. House	1 Hawes Rd	Bourne	c 1905
BOU.321		4 Hawes Rd	Bourne	r 1925
BOU.322		4 Hawes Rd	Bourne	r 1925
BOU.174	Clark, Rev. Francis E. House	10 Hawes Rd	Bourne	c 1915
BOU.28	Grazing Fields Farm - Bourne, Bethuel Tavern	Head of the Bay Rd	Bourne	1785
BOU.803	Head of the Bay Cemetery	Head of the Bay Rd	Bourne	1885
BOU.60	Gibbs House	291 Head of the Bay Rd	Bourne	c 1725
BOU.920	First Indian Meeting House Marker	Herring Pond Rd	Bourne	1924
BOU.204	Packard, Leander House	8 Herring Pond Rd	Bourne	c 1840
BOU.205	Lovell, Reuben House- Ellis, Rufus Store	12 Herring Pond Rd	Bourne	r 1835
BOU.206	Briggs, Seth House	26-26B Herring Pond Rd	Bourne	c 1883
BOU.58	Packard, Capt. Harness Shop	27 Herring Pond Rd	Bourne	r 1850
BOU.207	Packard, Capt. Harold G. House	27 Herring Pond Rd	Bourne	c 1840
BOU.57	Bournedale Village School	29 Herring Pond Rd	Bourne	1897
BOU.59	Gibbs, Nathan B. - Nightingale, George W. House	120 Herring Pond Rd	Bourne	c 1800
BOU.208	Allen, Herbert House	156 Herring Pond Rd	Bourne	c 1910
BOU.209	Ellis, Josiah - Nightingale, William House	166 Herring Pond Rd	Bourne	c 1800
BOU.210	Ellis, Josiah Barn	166 Herring Pond Rd	Bourne	
BOU.168	Shamrock, The	44 Hope Ave	Bourne	c 1890
BOU.276	Covell, Capt. John M. House	21 Hunters Brook Rd	Bourne	1812
BOU.277	Swift, William Jr. House	93 Hunters Brook Rd	Bourne	r 1800
BOU.197	George, Emily House	14 Keene St	Bourne	1901
BOU.198	Harmon, Persia B. House	20 Keene St	Bourne	c 1900
BOU.199	Reynolds, William House	23 Keene St	Bourne	c 1900
BOU.13	Bourne, Jonathan Public Library	30 Keene St	Bourne	1896
BOU.12	Waterhouse, Moses C. House	59 Keene St	Bourne	1885
BOU.200	Waterhouse, Moses C. Barn	59 Keene St	Bourne	c 1885
BOU.45	Swift, Ordello R. House	60 Keene St	Bourne	1878
BOU.46	Swift, Ordello R. Barn	60 Keene St	Bourne	r 1880
BOU.169		32 Kennebec Ave	Bourne	r 1920
BOU.170		32 Kennebec Ave	Bourne	
BOU.171		32 Kennebec Ave	Bourne	
BOU.65	Buzzards Bay Rail Road Station	Main St	Bourne	1912
BOU.66	Buzzards Bay Rail Road Interlocking Tower	Main St	Bourne	1912
BOU.804	Bourne Family Cemetery	Main St	Bourne	1862
BOU.214	Buzzards Bay Hotel	61 Main St	Bourne	r 1920
BOU.215	Buzzards Bay National Bank Block	71-73 Main St	Bourne	r 1920
BOU.216	Buzzards Bay Antique Shop - Bay Kitchen	71-73 Main St	Bourne	c 1920
BOU.217	Heirlooms Etc. - Grey Goose - Canal Antiques	95-97 Main St	Bourne	c 1900
BOU.218	Buzzards Bay Moving Picture House - Hoyts Cinemas	103-107 Main St	Bourne	c 1920

Inv. No.	Property Name	Street	Town	Year
BOU.219	Bourne Fire Station	130 Main St	Bourne	1933
BOU.220	Eldridge Lumber Company Office	134 Main St	Bourne	1935
BOU.61	Saint Margaret's Roman Catholic Church	141 Main St	Bourne	1915
BOU.221	Ma's Breakfast and Lunch	149 Main St	Bourne	r 1920
BOU.222	Ma's Breakfast and Lunch Garage	149 Main St	Bourne	
BOU.62	Saint Peter's Church-on-the-Canal	165 Main St	Bourne	r 1880
BOU.63	Buzzards Bay Garage	174 Main St	Bourne	c 1940
BOU.223		178 Main St	Bourne	c 1920
BOU.224		195 Main St	Bourne	r 1880
BOU.225		195 Main St	Bourne	
BOU.64	United States Service Organization - USO Clubhouse	239 Main St	Bourne	1940
BOU.226	Bourne Building	240 Main St	Bourne	r 1880
BOU.285	Keith, Eldon House	15 Maryland Ave	Bourne	r 1925
BOU.286	Keith, Eldon Garage	15 Maryland Ave	Bourne	
BOU.287	Keith, Eldon House	31 Maryland Ave	Bourne	r 1925
BOU.387	Eldon, Keith House	31 Maryland Ave	Bourne	r 1925
BOU.288	Keith, Eldon House	32 Maryland Ave	Bourne	c 1917
BOU.289	Cook, Capt. Charles - Furber, Laura P. House	35 Maryland Ave	Bourne	c 1880
BOU.290	Keith, Rufus P. House	36 Maryland Ave	Bourne	c 1900
BOU.291	Hastings, A. B. - Keith, Roger House	38 Maryland Ave	Bourne	r 1880
BOU.292	Kent, John P. House	39 Maryland Ave	Bourne	c 1900
BOU.293	Kent, John P. Garage	39 Maryland Ave	Bourne	
BOU.294	Leavitt, Dr. Pierce House	45 Maryland Ave	Bourne	1921
BOU.295	Hastings, A. B. Boathouse	49 Maryland Ave	Bourne	r 1905
BOU.296	Curry, Amelda - Leach, George House	51 Maryland Ave	Bourne	r 1925
BOU.297	Hastings, Alton House	53 Maryland Ave	Bourne	r 1925
BOU.298	Wattles, Benjamin House	57 Maryland Ave	Bourne	r 1925
BOU.299	Radcliffe House	61 Maryland Ave	Bourne	r 1925
BOU.113	Hunnewell, Arthur House	Mashnee Rd	Bourne	c 1900
BOU.227	Animal Rescue League Main Building	Megansett Rd	Bourne	r 1920
BOU.228	Animal Rescue League Recreational Building	Megansett Rd	Bourne	r 1920
BOU.229	Animal Rescue League Stable	Megansett Rd	Bourne	r 1920
BOU.230	Animal Rescue League Workshop	Megansett Rd	Bourne	r 1920
BOU.94	Storms, Capt. Peter House	23 Monument Neck Rd	Bourne	1824
BOU.95	Storms, Capt. Peter Barn	23 Monument Neck Rd	Bourne	r 1880
BOU.231	Davis, Alden P. - Gibbs, Capt. Irving F. House	19 Mystery Ln	Bourne	r 1875
BOU.232	Breeden, G. House	42 Mystery Ln	Bourne	r 1875
BOU.233	Breeden, G. Garage	42 Mystery Ln	Bourne	
BOU.234	Breeden, G. Barn	42 Mystery Ln	Bourne	
BOU.67	Swift, Abram F. House	37 Old Bridge St	Bourne	c 1906
BOU.29	Gibbs, Capt. Sylvanus House	Old Head of Bay Rd	Bourne	c 1800
BOU.30	Gibbs, Capt. Henry House	Old Head of Bay Rd	Bourne	c 1800
BOU.31	Gibbs, Capt. Caleb - Crystal Springs Inn	Old Head of Bay Rd	Bourne	1783
BOU.116	Gibbs, Capt. Russell House	8 Old Plymouth Rd	Bourne	r 1720
BOU.278	Swift, Francis C. House	95 Old Plymouth Rd	Bourne	r 1880
BOU.279	Swift, Francis C. Barn	95 Old Plymouth Rd	Bourne	r 1880
BOU.280		219 Old Plymouth Rd	Bourne	r 1850
BOU.281	Gibbs, Capt. William Crowell House	252 Old Plymouth Rd	Bourne	c 1840
BOU.282	Gibbs, Capt. William Crowell Garage	252 Old Plymouth Rd	Bourne	
BOU.283	Gibbs, Capt. William Crowell Garage	252 Old Plymouth Rd	Bourne	
BOU.284	Ellis, A. 2nd House	255 Old Plymouth Rd	Bourne	r 1850
BOU.172		19 Penobscot Ave	Bourne	c 1890
BOU.173		7 Pequot Ave	Bourne	c 1890
BOU.68	Bourne Town Hall	24 Perry Ave	Bourne	1914
BOU.69	Bourne Town Hall Garage	24 Perry Ave	Bourne	1920
BOU.922	Bourne Soldiers and Sailors Civil War Monument	24 Perry Ave	Bourne	1914

Inv. No.	Property Name	Street	Town	Year
BOU.934	Bourne World War I Monument	24 Perry Ave	Bourne	1918
BOU.935	Bourne War Memorial	24 Perry Ave	Bourne	1969
BOU.936	Bourne POW - MIA Monument	24 Perry Ave	Bourne	1985
BOU.359	Camp Edwards - Building #4030 - Administration	Pew Rd	Bourne	1941
BOU.360	Camp Edwards - Building #4016 - Goat Shed	Pew Rd	Bourne	1978
BOU.361	Camp Edwards - Building #4017 - Headquarters Bldg.	Pew Rd	Bourne	1978
BOU.362	Camp Edwards - Building #4032 - Storage Building	Pew Rd	Bourne	1988
BOU.924	Bourne - Sandwich Boundary Marker	Phillips Rd	Bourne	c 1884
BOU.178	Burgess, Charles H. House	21 Pleasant St	Bourne	r 1850
BOU.179	Burgess, Charles H. Barn	21 Pleasant St	Bourne	c 1850
BOU.180	Horton, H. House	34 Pleasant St	Bourne	c 1870
BOU.181	Keith, Hiram T. House	51 Pleasant St	Bourne	r 1865
BOU.182	Keith, Hiram T. Barn	51 Pleasant St	Bourne	r 1880
BOU.183	Packard, Capt. Roland T. House	65 Pleasant St	Bourne	c 1750
BOU.184	Keith, Isaac N. House	66 Pleasant St	Bourne	1880
BOU.185	Keith, Isaac N. Garage	66 Pleasant St	Bourne	1880
BOU.80	Cataumet Railroad Depot	2 Post Office Sq	Bourne	r 1925
BOU.114	Cleveland Lodge	186 Presidents Rd	Bourne	1886
BOU.245	Gammons, Ferdinand House	40 Red Brook Harbor Rd	Bourne	c 1900
BOU.246	Aldrich, A. L. House	48 Red Brook Harbor Rd	Bourne	1890
BOU.247		60 Red Brook Harbor Rd	Bourne	r 1920
BOU.248		60 Red Brook Harbor Rd	Bourne	
BOU.249	Robinson, Capt. George W. House	66 Red Brook Harbor Rd	Bourne	c 1870
BOU.250	Benson, F. W. House	67 Red Brook Harbor Rd	Bourne	r 1880
BOU.251	Parker - Robinson Boatyard Main Building	68 Red Brook Harbor Rd	Bourne	1912
BOU.252	Parker - Robinson Boatyard Main Workshop	68 Red Brook Harbor Rd	Bourne	r 1920
BOU.253	Parker - Robinson Boatyard Workshop	68 Red Brook Harbor Rd	Bourne	r 1920
BOU.254	Robinson House	75 Red Brook Harbor Rd	Bourne	r 1880
BOU.255		111 Red Brook Harbor Rd	Bourne	c 1910
BOU.81	Rothery, John J. E. House	9 Red Brook Pond Dr	Bourne	c 1900
BOU.82	Center Windmill	9 Red Brook Pond Dr	Bourne	1730
BOU.175	Assembly Hall - Clark, Harold S. Hall	30 Robinson Rd	Bourne	1907
BOU.323	Wolcott, Rev. William E. House	39 Robinson Rd	Bourne	c 1905
BOU.115	Hardy, Alpheus H. House	90 Rocky Point Rd	Bourne	c 1880
BOU.211	Ellis, Nathan Bourne - Blackwell, Benjamin House	854 Rt 6	Bourne	c 1836
BOU.212	Bournedale Lodge	854 Rt 6	Bourne	
BOU.213	Bournedale Lodge	854 Rt 6	Bourne	
BOU.939	Cape Cod Canal - Belmont Rock Quartz Monument	Rt 6E	Bourne	c 1935
BOU.8	Bourne Methodist Church Parsonage	Sandwich Rd	Bourne	c 1834
BOU.196	Saint Theresa's Roman Catholic Church	Sandwich Rd	Bourne	1926
BOU.809	Sagamore Cemetery	Sandwich Rd	Bourne	1803
BOU.925	Bourne-Providencetown-Plymouth Highway Marker	Sandwich Rd	Bourne	r 1850
BOU.926	Bourne-Providencetown-Plymouth Highway Marker	Sandwich Rd	Bourne	r 1850
BOU.927	Bourne-Sandwich Town Line Marker	Sandwich Rd	Bourne	r 1850
BOU.47	Perry, Elisha Jr. House	1 Sandwich Rd	Bourne	c 1825
BOU.7	Perry, Benjamin - Ellis, Gideon House	9 Sandwich Rd	Bourne	c 1690
BOU.14	Bourne Grammar School	19 Sandwich Rd	Bourne	1925
BOU.1	Briggs, George I. House	22 Sandwich Rd	Bourne	1802
BOU.48	Booth, Alonzo E. Blacksmith Shop	22 Sandwich Rd	Bourne	c 1888
BOU.2	Monument Academy - Bourne School Administration	36 Sandwich Rd	Bourne	c 1840
BOU.9	Bourne United Methodist Church	37 Sandwich Rd	Bourne	1831
BOU.201	Perry, Thomas House	38 Sandwich Rd	Bourne	r 1820
BOU.10	Eldridge, Albert R. House	43 Sandwich Rd	Bourne	1889
BOU.202	Eldridge, Albert R. Barn	43 Sandwich Rd	Bourne	
BOU.3	Eldridge, Franklin C. House	46 Sandwich Rd	Bourne	1892
BOU.11	Blackington Store - Monument Post Office	49 Sandwich Rd	Bourne	r 1860

Inv. No.	Property Name	Street	Town	Year
BOU.5	Daggett, Moses House	56 Sandwich Rd	Bourne	1888
BOU.203	Swift, Capt. Ellis M. House	59 Sandwich Rd	Bourne	c 1820
BOU.6	Parker, Arabella Ellis House	60 Sandwich Rd	Bourne	1892
BOU.49	Parker, Arabella - Ellis, George House	66 Sandwich Rd	Bourne	c 1840
BOU.50	Ellis, Dea. Gershom - Blackwell, Henry S. House	201 Sandwich Rd	Bourne	c 1835
BOU.328	Keith Car Company Apartments	860 Sandwich Rd	Bourne	c 1900
BOU.329	Keith Car Company Apartments	860 Sandwich Rd	Bourne	c 1900
BOU.330	Keith Car Company Apartments	860 Sandwich Rd	Bourne	c 1900
BOU.331	Keith Car Company Apartments	860 Sandwich Rd	Bourne	c 1900
BOU.332	Sempioni Hall	886 Sandwich Rd	Bourne	r 1920
BOU.333		887 Sandwich Rd	Bourne	1874
BOU.334		887 Sandwich Rd	Bourne	
BOU.186	Gurney, Samuel H. House and Variety Store	896 Sandwich Rd	Bourne	1890
BOU.335	Railroad Station Master's House	901 Sandwich Rd	Bourne	r 1880
BOU.336	Keith Car Works Company Worker Housing	903 Sandwich Rd	Bourne	r 1935
BOU.187	Crowell, Hiram E. House	940 Sandwich Rd	Bourne	r 1850
BOU.188	Harlow, S. - Pope, Benjamin Harlow House	941 Sandwich Rd	Bourne	r 1835
BOU.337		946 Sandwich Rd	Bourne	r 1865
BOU.338		946 Sandwich Rd	Bourne	r 1865
BOU.189	Keith, Isaac N. Company Worker Housing	947 Sandwich Rd	Bourne	c 1870
BOU.190	Keith, Isaac N. Company Worker Housing Barn	947 Sandwich Rd	Bourne	c 1870
BOU.191	Gibbs, F. House - Keith Car Works Worker Housing	980 Sandwich Rd	Bourne	c 1850
BOU.339	Benson, D. - Wedlock, John House	990 Sandwich Rd	Bourne	c 1850
BOU.340	Benson, D. - Wedlock, John Barn	990 Sandwich Rd	Bourne	c 1850
BOU.192	Crowell - Burgess, Hanna Rebecca House	1005 Sandwich Rd	Bourne	r 1720
BOU.193	Crowell - Burgess, Hanna Rebecca Barn	1005 Sandwich Rd	Bourne	r 1850
BOU.341	Keith Car Works Company Worker Housing	1061 Sandwich Rd	Bourne	c 1900
BOU.342	Keith Car Works Company Worker Housing	1063 Sandwich Rd	Bourne	c 1900
BOU.343	Keith Car Works Company Worker Housing	1067 Sandwich Rd	Bourne	c 1900
BOU.344	Ellis, C. Grant House	1071 Sandwich Rd	Bourne	c 1900
BOU.345	Rogers House	1085 Sandwich Rd	Bourne	r 1920
BOU.194	Freeman House	1101 Sandwich Rd	Bourne	1718
BOU.195	Freeman Barn	1101 Sandwich Rd	Bourne	
BOU.346	Sagamore Inn	1131 Sandwich Rd	Bourne	c 1930
BOU.800	Sandy Point Road Indian Cemetery	Sandy Point Rd	Bourne	c 1849
BOU.120	Keith Freight Car Manufacturing Co. Worker Housing	11 Savery Ave	Bourne	c 1908
BOU.121	Keith Freight Car Manufacturing Co. Worker Housing	17 Savery Ave	Bourne	c 1908
BOU.122	Keith Freight Car Manufacturing Co. Worker Housing	21 Savery Ave	Bourne	c 1908
BOU.123	Keith Freight Car Manufacturing Co. Worker Housing	23 Savery Ave	Bourne	c 1908
BOU.124	Keith Freight Car Manufacturing Co. Worker Housing	25 Savery Ave	Bourne	c 1908
BOU.125	Keith Freight Car Manufacturing Co. Worker Housing	27 Savery Ave	Bourne	c 1908
BOU.126	Keith Freight Car Manufacturing Co. Worker Housing	31 Savery Ave	Bourne	c 1908
BOU.127	Keith Freight Car Manufacturing Co. Worker Housing	33 Savery Ave	Bourne	c 1908
BOU.128	Keith Freight Car Manufacturing Co. Worker Housing	35 Savery Ave	Bourne	c 1908
BOU.129	Keith Freight Car Manufacturing Co. Worker Housing	39 Savery Ave	Bourne	c 1908
BOU.130	Keith Freight Car Manufacturing Co. Worker Housing	40 Savery Ave	Bourne	c 1908
BOU.131	Keith Freight Car Manufacturing Co. Worker Housing	42 Savery Ave	Bourne	c 1908
BOU.132	Keith Freight Car Manufacturing Co. Worker Housing	46 Savery Ave	Bourne	c 1908
BOU.133	Keith Freight Car Manufacturing Co. Worker Housing	50 Savery Ave	Bourne	c 1908
BOU.134	Keith Freight Car Manufacturing Co. Worker Housing	52 Savery Ave	Bourne	c 1908
BOU.324	Ellis, C. Grant House	10 Shawmut Rd	Bourne	c 1905
BOU.325	Fisherman's Shack - Smith, Elma M. House	14 Shawmut Rd	Bourne	c 1890
BOU.802	Oakland Grove Cemetery	Shore Rd	Bourne	c 1900
BOU.807	Monument Neck Cemetery	Shore Rd	Bourne	1823
BOU.51	Perry, Rev. Herman House	7 Shore Rd	Bourne	r 1820
BOU.52	Bauldry, Capt. George F. House	160 Shore Rd	Bourne	c 1870

Inv. No.	Property Name	Street	Town	Year
BOU.53	Eldridge, Albert R. House	172 Shore Rd	Bourne	1909
BOU.96	Monument Beach Train Station	440 Shore Rd	Bourne	c 1906
BOU.98	Monks, Dr. George H. House - Briarwood	586 Shore Rd	Bourne	r 1880
BOU.99	Monks, Dr. George H. Lodge	586 Shore Rd	Bourne	r 1920
BOU.100	Briarwood Conference Center - Welcoming Building	586 Shore Rd	Bourne	r 1935
BOU.101	Briarwood Conference Center Cabin	586 Shore Rd	Bourne	r 1950
BOU.102	Briarwood Conference Center Cabin	586 Shore Rd	Bourne	r 1950
BOU.103	Briarwood Conference Center Cabin	586 Shore Rd	Bourne	r 1950
BOU.104	Briarwood Conference Center Cabin	586 Shore Rd	Bourne	r 1950
BOU.105	Briarwood Conference Center Cabin	586 Shore Rd	Bourne	r 1950
BOU.106	Briarwood Conference Center Cabin	586 Shore Rd	Bourne	r 1950
BOU.107	Briarwood Conference Center Cabin	586 Shore Rd	Bourne	r 1950
BOU.108	Briarwood Conference Center Bath House	586 Shore Rd	Bourne	r 1950
BOU.109	Monks, Dr. George H. Carriage House	586 Shore Rd	Bourne	r 1880
BOU.110	Briarwood Conference Center Tool Shed	586 Shore Rd	Bourne	r 1965
BOU.111	Briarwood Conference Center Maintenance Shed	586 Shore Rd	Bourne	r 1965
BOU.112	Briarwood Conference Center Boat House	586 Shore Rd	Bourne	r 1920
BOU.97	Saint John's the Evangelist Roman Catholic Church	841 Shore Rd	Bourne	1931
BOU.140	Wood, Maj. Gen. Leonard House	866 Shore Rd	Bourne	1876
BOU.141	Wood, Dr. Charles Barn	866 Shore Rd	Bourne	1876
BOU.235	Pettee, Benjamin House	5 Squeteague Harbor Rd	Bourne	r 1875
BOU.236	Ferguson, James G. House	15 Squeteague Harbor Rd	Bourne	r 1875
BOU.237	Gilbrath, Capt. Benjamin H. House	16 Squeteague Harbor Rd	Bourne	r 1880
BOU.238	Ferguson, Bennett S. House	31 Squeteague Harbor Rd	Bourne	r 1880
BOU.239	Perkins House	32 Squeteague Harbor Rd	Bourne	r 1875
BOU.240		34 Squeteague Harbor Rd	Bourne	r 1920
BOU.241	Kuhnhardt, L. Henry House	36 Squeteague Harbor Rd	Bourne	r 1875
BOU.242	Ripley, Thomas W. House	37 Squeteague Harbor Rd	Bourne	r 1880
BOU.243	Ripley, Thomas W. Barn	37 Squeteague Harbor Rd	Bourne	
BOU.244	Hill, William P. House	50 Squeteague Harbor Rd	Bourne	r 1875
BOU.326	Donovan, James Malden House	226 Standish Rd	Bourne	c 1905
BOU.327	Donovan, James Malden Garage	226 Standish Rd	Bourne	c 1905
BOU.389	Cape Cod Canal - Electrical Substation	Sunset Ln	Bourne	1936
BOU.117	North Sagamore Schoolhouse	42 Washburn Rd	Bourne	r 1860
BOU.363	Camp Edwards - Building #4020 - Administration	Wheelock Rd	Bourne	1959
BOU.364	Camp Edwards - Building #4021 - GAT Generator	Wheelock Rd	Bourne	1959
BOU.365	Camp Edwards - Building #4020A - Storage Shed	Wheelock Rd	Bourne	c 1986
BOU.933	Camp Edwards Range Control Flagpole	Wheelock Rd	Bourne	1959
BOU.118	Swift Memorial Methodist Episcopal Church	10 Williston Rd	Bourne	1910
BOU.119	Sagamore Grammar School	30 Williston Rd	Bourne	1909
BOU.176	U. S. Post Office - Sagamore Beach Branch	434 Williston Rd	Bourne	c 1905
BOU.36	Wing's Neck Light Keeper's Dwelling	Wing's Neck Rd	Bourne	1889
BOU.37	Wing's Neck Light Oil House	Wing's Neck Rd	Bourne	1849
BOU.38	Wing's Neck Light Second Keeper's House	Wing's Neck Rd	Bourne	r 1875
BOU.39	Wing's Neck Light Boathouse	Wing's Neck Rd	Bourne	
BOU.275	Lindberg, Charles House	42 Wyman Ave	Bourne	r 1920

Obtained October 12, 2016, <http://mhc-macris.net/>

APPENDIX E

Hazardous Releases in Bourne

Hazardous Materials Released in the Town of Bourne

RTN	Release Address	Site Name/ Location Aid	Reporting	Notification Date	Compliance Status	Date	Phase	RAO Class	Chemical Type	Files
4-000033	MA MILITARY RESERVATION	MMRFTA 1 FIRE TRAINING AREA	NONE	1/15/1987	DEPNDS	7/23/1993			Oil	N
4-0000267	156 HERRING POND RD	MA GAS & ELECTRIC	NONE	1/13/1987	DEPNFA	7/23/1993				Y
4-0000408	195 BOURNE DALE RD	SE WILDLIFE DISTRICT	NONE	7/21/1987	DEPNFA	7/23/1993			Hazardous Material	Y
4-0000638	MA MILITARY RESERVATION	MMRFS 20 TANK 22	NONE	1/15/1989	DEPNDS	7/23/1993			Oil	N
4-0000639	SOUTH TRUCK RD	MMRCS 3 FS 23	NONE	1/15/1989	DEPNFA	7/23/1993				N
4-0000661	SOUTH OUTER RD ASHUMET POND	MMRSD 1 DRAINAGE DITCH	NONE	1/15/1989	DEPNDS	7/23/1993			Oil	N
4-0000664	MA MILITARY RESERVATION	MMRCS 8 FS 21 MOTOR POOL	NONE	1/15/1989	DEPNDS	7/23/1993				N
4-0000987	304 SHORE RD MONUMENT BCH	CAPE MARINE INC	NONE	2/24/1992	DEPNFA	7/23/1993			Oil	Y
4-0001262	BLDG 167 AOC FS1	MMRFS 25 S BLDG 167	NONE	1/15/1993	DEPNFA	7/23/1993			Oil	N
4-0001302	127 STATE RD RTE 31	EAGLE MARINE	NONE	5/25/1993	DEPNFA	7/23/1993				Y
4-0000037	MASSACHUSETTS MILITARY RESERVATION MMR	MASSACHUSETTS MILITARY RESERVATION MMR	NONE	1/10/1986	TIERI	10/1/1993			Oil and Hazardous Material	Y
4-0000694	SEWAGE PLANT ASHUMET PLUME	MMRFTA 1 GW CS16 17	NONE	4/15/1989	ADEQUATE REG	10/1/1993			Oil	N
4-0000030	ADJACENT TO TAXIWAY E	MMRFS 1 AVGAS TEST SITE	NONE	1/15/1987	ADEQUATE REG	10/2/1993			Oil	Y
4-0000031	MA MILITARY RESERVATION	MMRLF 1 GW BASE LANDFILL	NONE	1/15/1987	ADEQUATE REG	10/2/1993				Y
4-0000034	SOUTH OUTER RD LINGLEY AVE	MMRFTA 2 LF 2 FIRE TRAINING	NONE	1/15/1987	ADEQUATE REG	10/2/1993			Oil	N
4-0000035	NORTH INNER RD LINGLEY AVE	MMRSD 5 FS 5 NON DESTRTST	NONE	1/15/1987	ADEQUATE REG	10/2/1993			Oil	N
4-0000038	GUENTHER RD KITTREDGE RD	MMRFS 2 RAIL YARD	NONE	1/15/1987	ADEQUATE REG	10/2/1993			Oil	N
4-0000039	HERBERT RD	MMRLF 1S LANDFILL	NONE	1/15/1987	ADEQUATE REG	10/2/1993				N
4-0000635	GREENWAY RD SANDWICH GATE	MMRCS 10 FS 24 UTES BOMARC	NONE	1/15/1989	ADEQUATE REG	10/2/1993			Oil	Y
4-0000636	SOUTH OUTER RD	MMRSD 2 FS 6 FS 8PFA	NONE	1/15/1989	ADEQUATE REG	10/2/1993			Oil	N
4-0000640	NEAR BRIARWOOD SUBDIVISION	MMRFS 3 JOHN POND RD	NONE	1/15/1989	ADEQUATE REG	10/2/1993			Oil	N
4-0000641	WEST TRUCK RD BEAMON RD	MMRCS 4	NONE	1/15/1989	ADEQUATE REG	10/2/1993				N
4-0000642	REILLY RD	MMRSD 4 AIRCRAFT DRAIN	NONE	1/15/1989	ADEQUATE REG	10/2/1993				N
4-0000643	OFF REILLY RD	MMRCS 15 ENGINE RUN UP	NONE	1/15/1989	ADEQUATE REG	10/2/1993			Oil	Y
4-0000644	MA MILITARY RESERVATION	MMRCS 4 CG FS 1 CG HANGER 128	NONE	1/15/1989	ADEQUATE REG	10/2/1993			Oil	N
4-0000645	MA MILITARY RESERVATION	MMRCS 2 CG HANGER 3170	NONE	1/15/1989	ADEQUATE REG	10/2/1993				N
4-0000646	MA MILITARY RESERVATION	MMRCS 14 BLPIT BLDG 156	NONE	1/15/1989	ADEQUATE REG	10/2/1993			Oil	N
4-0000647	MA MILITARY RESERVATION	MMRFS 4 TANKS 100 & 101	NONE	1/15/1989	ADEQUATE REG	10/2/1993			Oil	N
4-0000648	WEAVER RD LEE RD	MMRFS 19 MOGAS STORAGE AREA	NONE	1/15/1989	ADEQUATE REG	10/2/1993			Oil	N
4-0000649	CONNERY AVE	MMRCS 9 USAF MOTOR POOL	NONE	1/15/1989	ADEQUATE REG	10/2/1993			Oil	N
4-0000650	MA MILITARY RESERVATION	MMRCS 5 MAINTENANCE SHOP	NONE	1/15/1989	ADEQUATE REG	10/2/1993			Oil	N
4-0000651	MA MILITARY RESERVATION	MMRFS 9 PRODUCT TANK #108	NONE	1/15/1989	ADEQUATE REG	10/2/1993			Oil	N
4-0000652	GAFFNEY RD	MMRFS 18 FUEL TRANSPORT PT	NONE	1/15/1989	ADEQUATE REG	10/2/1993			Oil	N
4-0000653	CANTONMENT AREA	MMRFS 13 FUEL LINE LEAK	NONE	1/15/1989	ADEQUATE REG	10/2/1993			Oil	N
4-0000654	LEE RD	MMRCS 13BX SERVICE STATION	NONE	1/15/1989	ADEQUATE REG	10/2/1993			Oil	N
4-0000655	MA MILITARY RESERVATION	MMRCS 6 USCG MAINTENANCE	NONE	1/15/1989	ADEQUATE REG	10/2/1993			Oil	N
4-0000656	MA MILITARY RESERVATION	MMRFS 7 TANK 115	NONE	1/15/1989	ADEQUATE REG	10/2/1993			Oil	N
4-0000657	FRANK PERKINS RD	MMRFS 17 WWII MOTOR POOL	NONE	1/15/1989	ADEQUATE REG	10/2/1993			Oil	N
4-0000658	MA MILITARY RESERVATION	MMRCS 11 PESTICIDE SHOP	NONE	1/15/1989	ADEQUATE REG	10/2/1993				N
4-0000659	MA MILITARY RESERVATION	MMRFS 14 RANGE E 3	NONE	1/15/1989	ADEQUATE REG	10/2/1993			Oil	N
4-0000660	NORTH OF SNAKE RD	MMR FS-12/SANDWICH	NONE	1/15/1989	ADEQUATE REG	10/2/1993			Oil and Hazardous Material	N
4-0000662	GRANVILLE AVE	MMRSD 3 FTA 3 CY 4 TRAINING	NONE	1/15/1989	ADEQUATE REG	10/2/1993			Oil	N
4-0000663	GREENWAY RD JEFFERSON RD	MMRCS 1 CG TRANSMITTER	NONE	1/15/1989	ADEQUATE REG	10/2/1993				N
4-0001248	BLDG 754 SOUTH INNER RD	MMRCS 6 FS 22ANG MOTOR POOL	NONE	1/15/1993	ADEQUATE REG	10/2/1993			Oil	N
4-0001249	EAST TRUCK RD MOTOR POOL	MMRCS 2 MOTOR POOL	NONE	1/15/1993	ADEQUATE REG	10/2/1993			Oil	N
4-0001250	NORTH TRUCK RD MOTOR POOL	MMRCS 1 MOTOR POOL	NONE	1/15/1993	ADEQUATE REG	10/2/1993			Oil	N
4-0001251	BUILDING 3444	MMRFS 26 CG BLDG 3444	NONE	1/15/1993	ADEQUATE REG	10/2/1993			Oil	N
4-0001253	CONNERY AVE GUENTHER AVE	MMRFS 27	NONE	1/15/1993	ADEQUATE REG	10/2/1993			Oil	N
4-0001254	LANDFILL AREA	MMRLF 1 CG RUBBLE DEBRIS	NONE	1/15/1993	ADEQUATE REG	10/2/1993			Oil	N
4-0001255	TURPENTINE RD	MMRFS 2 CG ASPHALT PLANT	NONE	1/15/1993	ADEQUATE REG	10/2/1993			Oil	N

Hazardous Materials Released in the Town of Bourne

RTN	Release Address	Site Name/ Location Aid	Reporting	Notification Date	Compliance Status	Date	Phase	RAO Class	Chemical Type	Files
4-0001256	ARTILLERY FIRING PTS	MMRCS 18 PROPELLENT BURNING	NONE	1/15/1993	ADEQUATE REG	10/2/1993				N
4-0001258	JOHNS POND	MMRFL 4 JOHN S POND	NONE	1/15/1993	ADEQUATE REG	10/2/1993				N
4-0001259	SOUTH OUTER RD	MMRPFA FS 10 FS 11	NONE	1/15/1993	ADEQUATE REG	10/2/1993			Oil	N
4-0001260	SANDWICH GATE GREENWAY RD	MMRCS 10 GW	NONE	1/15/1993	ADEQUATE REG	10/2/1993			Oil	N
4-0001261	MA MILITARY RESERVATION	MMRSERGOU	NONE	1/15/1993	ADEQUATE REG	10/2/1993			Oil	N
4-0001263	MA MILITARY RESERVATION	MMRCS 19 IMPACT AREA	NONE	1/15/1993	ADEQUATE REG	10/2/1993			Hazardous Material	N
4-0010216	HERBERT RD	RUNWAYBLDG 3170	TWO HR	1/19/1994	RAO	3/9/1994		A1	Oil and Hazardous Material	Y
4-0010139	GREENWAY RD	MMR UNIT TRAINING EQUIPMENT	TWO HR	12/9/1993	RAO	4/7/1994		A1	Oil	Y
4-0010314	OTIS AIR FORCE BASE	NEAR BLDG 196	TWO HR	3/7/1994	RAO	5/3/1994		A1	Oil	Y
4-0000871	CPE COD AIR FORCE STA	PAVE PAWS RADAR INSTALLATION	NONE	2/23/1990	RAO	6/7/1994		A2	Oil	Y
4-0010676	OTIS ANG BASE	E-ROW OF AIRCRAFT PKG RAMP	TWO HR	8/16/1994	RAO	10/13/1994		A1	Oil	Y
4-0006004	9 WALLACE POINT RD	PROPERTY	NONE	10/1/1993	RAO	10/24/1994		A2		Y
4-0010607	MMR	FLIGHT LINE RAMP	TWO HR	8/1/1994	RAO	10/28/1994		A1	Oil	Y
4-0010727	GEN MACARTHUR BLVD	BOURNE ROTARY	TWO HR	9/1/1994	RAO	11/1/1994		A1	Oil	Y
4-0010767	GREENWAY RD	CAMP EDWARDS BUILDING 4600	TWO HR	9/15/1994	RAO	11/15/1994		A1	Oil	Y
4-0010133	68 RED BROOK HARBOR RD	PARKER BOAT YARD	TWO HR	12/7/1993	RAO	12/8/1994		A2	Oil	Y
4-0010743	159 SOUTH RD	WINGS NECK POCASSET	72 HR	9/7/1994	RAO	2/2/1995		A1	Oil	Y
4-0010351	11 PERRY AVE	NYNEX-GARAGE	72 HR	3/28/1994	RAO	3/31/1995		A2	Oil	Y
4-0011171	GREENWAY RD	UTES MMR	TWO HR	3/2/1995	RAO	5/1/1995		A1	Oil	Y
4-0010292	11 PERRY AVE	NO LOCATION AID	TWO HR	2/22/1994	RAO	6/5/1995		A2	Oil	Y
4-0011310	101 ACADEMY DR	MMA - POWER PLANT	TWO HR	4/19/1995	RAO	8/4/1995		A2	Oil	Y
4-0010201	SAGAMORE ROTARY	FACILITY NO 88	TWO HR	1/12/1994	RAO	8/11/1995		A1	Oil	Y
4-0011560	BLDG 196	OTIS ANG BASE	TWO HR	7/31/1995	RAO	8/21/1995		A1	Oil	Y
4-0011607	TROW BRIDE RD	PEEPLES SCHOOL	72 HR	8/24/1995	RAO	12/15/1995		A1	Oil	Y
4-0012112	65 WALLACE POINT RD	SACHS RESIDENTIAL PROPERTY	72 HR	4/23/1996	RAO	6/14/1996		A1	Oil	Y
4-0000980	360A MACARTHUR BLVD	TEXACO SERVICE STATION	NONE	1/15/1991	LSPNFA	8/2/1996			Oil	Y
4-0012263	COUNTY RD	BARNSTABLE CTY HOSPITAL	TWO HR	6/14/1996	RAO	8/13/1996		A1	Oil	Y
4-0000036	SHIPYARD LA	KINGMAN MARINE INC	NONE	3/6/1986	RAO	10/4/1996			Oil	Y
4-0011936	1 SANDWICH RD	NO LOCATION AID	TWO HR	2/6/1996	RAO	1/6/1997		A2	Oil	Y
4-0010342	175 MAIN ST	BOURNE POLICE HQ	72 HR	3/15/1994	RAO	1/7/1997	PHASE II	A2	Oil	Y
4-0000032	BARLOW LANDING RD	COMPONENTS MFG SERVICE	NONE	1/15/1987	LSPNFA	3/3/1997	PHASE III			Y
4-0012155	GEN MACARTHUR BLVD	FACILITY NO 134	120 DY	3/15/1996	RAO	3/14/1997		B1	Hazardous Material	Y
4-0012144	MEETING HOUSE RD	FACILITY NO 88	120 DY	3/15/1996	DPS	3/17/1997			Hazardous Material	Y
4-0012710	MEETINGHOUSE RD	FACILITY NO 88	72 HR	11/4/1996	DPS	3/17/1997			Hazardous Material	Y
4-0012864	OTIS ANG BASE	FIRE TRAINING ARE 1 I	TWO HR	2/26/1997	RAO	4/14/1997		A2	Oil	Y
4-0012235	SAGAMORE ROTARY	NO LOCATION AID	TWO HR	6/12/1996	RAO	6/17/1997		A1	Oil	Y
4-0012875	11 MAIN ST	FOOD N FUEL	72 HR	2/28/1997	RAO	6/20/1997		A1	Oil	Y
4-0012979		OTIS CEMETERY	TWO HR	4/22/1997	RAO	6/27/1997		A1	Oil	Y
4-0000896	OLD FREIGHT HOUSE RD	THE COAL MAN OF CC FMR	NONE	11/7/1991	TIER1D	8/11/1997			Oil	Y
4-0013114	123 BRIDGE ST	NO LOCATION AID	TWO HR	6/20/1997	RAO	8/13/1997		A1	Oil	Y
4-0013130	MMR	LAYDOWN AREA	TWO HR	6/25/1997	RAO	10/30/1997		A1		Y
4-0013367	RTE 28	OTIS ROTARY	TWO HR	9/19/1997	RAO	12/15/1997		A2	Oil	Y
4-0010698	2 BOURNE ROTARY	IHOP RESTAURANT	120 DY	8/22/1994	DPS	6/17/1998			Hazardous Material	Y
4-0013977	5 MIDWAY RD	NO LOCATION AID	TWO HR	6/28/1998	RAO	8/11/1998		A1	Oil	Y
4-0013683	CP EDWARDS TRAINING RANGE	IMPACT AREA J-1 RANGE TANK ALLEY	TWO HR	2/10/1998	RAO	9/1/1998		A1		Y
4-0014086	101 ACADEMY DR	MMA	TWO HR	8/4/1998	RAO	9/22/1998		A1		Y
4-0014212	50 RTE 28A	LONG HILL RD	120 DY	9/25/1998	DPS	9/25/1998			Hazardous Material	Y
4-0012276	SOUTH OUTER RD	FUEL FARM	TWO HR	6/18/1996	RAO	11/12/1998	PHASE II	A2	Oil	Y
4-0013290	SHELDON ROAD AND CONNORY AVE	CAMP EDWARDS BLDG 1807 FMR	120 DY	8/18/1997	RAO	2/1/1999		A1	Oil	Y
4-0011681	5300 CURTIS BLVD	CAMPBELL SCHOOL - MMR	120 DY	8/29/1995	RAO	3/30/1999	PHASE II	A1	Hazardous Material	Y

Hazardous Materials Released in the Town of Bourne

RTN	Release Address	Site Name/ Location Aid	Reporting	Notification Date	Compliance Status	Date	Phase	RAO Class	Chemical Type	Files
4-0010835	BOURNE ROTARY	TEXACO STATION	120 DY	10/11/1994	RTN CLOSED	6/21/1999			Oil	Y
4-0014625	USCG AIR STATION CPE COD	USCG GAS STATION	TWO HR	3/26/1999	RAO	7/23/1999		A1	Oil	Y
4-0014773	USCG AIR STATION CPE COD	RESIDENTIAL AREA	TWO HR	6/3/1999	RAO	8/10/1999		A1		Y
4-0016438		GUN POSITION 17	120 DY	5/29/1998	RTN CLOSED	9/23/1999			Hazardous Material	N
4-0000380	105 MAIN ST	BUZZARDS BAY CINEMA	NONE	6/29/1987	RAO	11/1/1999	PHASE II	A2		Y
4-0014339	MEETING HOUSE RD	FACILITY NO 88	72 HR	11/16/1998	RAO	11/18/1999		A2	Oil	Y
4-0015153	OFF HOG IS	EAST CANAL APPROACH	TWO HR	11/28/1999	ADEQUATE REG	11/28/1999			Oil	N
4-0014393	1 SHIPYARD LN	KINGMAN MARINE	120 DY	12/14/1998	RAO	12/7/1999		A2	Oil	Y
4-0015038	1 SHIPYARD LN	KINGMAN MARINE	72 HR	9/29/1999	RAO	12/7/1999		A2	Oil	Y
4-0014181	GEN MACARTHUR BLVD	BOURNE LANDFILL	120 DY	9/17/1998	RAO	12/16/1999		A2		Y
4-0011879	35 OLD PLYMOUTH RD	NO LOCATION AID	TWO HR	1/4/1996	RAO	1/11/2000		A2	Oil	Y
4-0015053	988 SANDWICH RD	COOK RESIDENCE	TWO HR	10/6/1999	RAO	1/20/2000		A1	Oil	Y
4-0015159	5300 CURTIS BLVD	CAMPBELL SCHOOL	TWO HR	12/6/1999	RAO	4/4/2000		A1	Oil	Y
4-0015411	TROW BRIDGE RD	PEEBLES SCHOOL	TWO HR	4/7/2000	RAO	6/5/2000		A1	Oil	Y
4-0016434	HERBERT RD	F RANGE FMR	120 DY	3/26/2000	RTN CLOSED	6/9/2000			Hazardous Material	N
4-0016435	HOWE RD	GUN POSITION 10	120 DY	2/17/2000	RTN CLOSED	6/9/2000			Hazardous Material	Y
4-0016436	HOWE RD	GUN POSITION 11	120 DY	1/13/2000	RTN CLOSED	6/9/2000			Hazardous Material	Y
4-0016437	POCASSETT FORESTDALE RD	OLD GUN POSITION 15	120 DY	2/4/2000	RTN CLOSED	6/9/2000			Hazardous Material	Y
4-0016439	KENDRICK RD	OLD GUN POSITION 19	120 DY	6/9/2000	RTN CLOSED	6/9/2000			Hazardous Material	Y
4-0016441	CP EDWARDS	OLD GUN POSITION 3	120 DY	6/1/2000	RTN CLOSED	6/9/2000			Hazardous Material	Y
4-0016442	MITTEN RD	GUN POSITION 8	120 DY	2/17/2000	RTN CLOSED	6/9/2000			Hazardous Material	Y
4-0016445	POCASSET FORESTDALE RD	MORTAR POSITION 1	120 DY	4/18/2000	RTN CLOSED	6/9/2000			Hazardous Material	Y
4-0017585	POCASSETT SANDWICH RD	MP-4	120 DY	6/9/2000	RTN CLOSED	6/9/2000			Hazardous Material	Y
4-0014822	5 MACARTHUR BLVD	TEXACO FMR	72 HR	7/1/1999	RTN CLOSED	6/22/2000			Oil	N
4-0013399	SHORE RD	NO LOCATION AID	TWO HR	9/29/1997	RAO	8/9/2000		A1	Oil	Y
4-0015550	CONNERY AVE	INBOUND FROM OTIS ROTARY	TWO HR	6/19/2000	RAO	9/7/2000		A2	Oil	Y
4-0015592	1 CANAL RD	SORENTI TEXACO	TWO HR	7/7/2000	RTN CLOSED	9/8/2000			Oil	Y
4-0015032	MITTON RD	IMPACT AREA 17 GP7	120 DY	9/23/1999	TIER 2	9/25/2000	PHASE II		Hazardous Material	Y
4-0015034	TURPENTINE RD	IMPACT AREA 2	120 DY	9/23/1999	RAO	9/26/2000		B1	Hazardous Material	Y
4-0015808	PHINNYS CV	NO LOCATION AID	TWO HR	9/26/2000	ADEQUATE REG	9/26/2000			Oil	N
4-0015031	CP EDWARDS	IMPACT AREA	120 DY	9/23/1999	TIER1D	10/2/2000	PHASE II		Hazardous Material	Y
4-0015122	FLATROCK HL	CAPE COD AIR STATION USAF	120 DY	11/8/1999	RAO	11/7/2000		B1	Hazardous Material	N
4-0017292	GOAT PASTURE RD	DEMO-2	120 DY	9/27/2000	RTN CLOSED	11/16/2000	PHASE II		Hazardous Material	Y
4-0017584	TURPENTINE RD TANK ALLEY RD	HUTA -1	120 DY	11/1/2000	RTN CLOSED	11/16/2000			Hazardous Material	Y
4-0015558	19 BENEDICT RD	NO LOCATION AID	72 HR	6/30/2000	RAO	4/17/2001		A2	Oil	Y
4-0015913	997 COUNTY RD	COLONIAL GAS CO.	72 HR	12/11/2000	RAO	4/18/2001		A2	Oil	Y
4-0015535	COAST GUARD AIR STA	USCG AIR STATION CAPE COD	TWO HR	6/13/2000	RAO	6/13/2001		A2	Oil	Y
4-0016126	1 SHIPYARD LN	KINGMAN YACHT CENTER	72 HR	3/19/2001	RAO	7/13/2001		A2	Oil	Y
4-0016377	CPE COD CANAL	CAPE COD CANAL	TWO HR	7/13/2001	ADEQUATE REG	7/13/2001			Oil	N
4-0014189	SOUTH OUTER RD	FUEL FARM	TWO HR	9/22/1998	RAO	7/26/2001	PHASE II	A2	Oil	Y
4-0010719	121 MAIN ST	CAPE COD BANK AND TRUST	72 HR	8/29/1994	RAO	8/30/2001	PHASE V	A2	Oil	Y
4-0011910	373 BARLOWS LANDING RD	NO LOCATION AID	72 HR	1/25/1996	RTN CLOSED	10/9/2001			Oil	Y
4-0017047	PEW RD	ASP	120 DY	10/23/2001	RTN CLOSED	10/23/2001			Hazardous Material	N
4-0017140	WOOD RD	CA-1	120 DY	8/23/2001	RTN CLOSED	10/23/2001			Hazardous Material	N
4-0017141	AVERY RD	FMR A RANGE	120 DY	8/24/2001	RTN CLOSED	10/23/2001	PHASE II		Hazardous Material	Y
4-0017587	OFF MONUMENT BEACH RD	OLD C RANGE	120 DY	9/13/2001	RTN CLOSED	10/23/2001	PHASE II		Hazardous Material	N
4-0017684	FRANK PERKINS RD	OLD D RANGE	120 DY	10/11/2001	RTN CLOSED	10/23/2001			Hazardous Material	N
4-0016701	42 HOLT RD	NO LOCATION AID	TWO HR	10/24/2001	RAO	12/31/2001		A2		Y
4-0016818	ACADEMY DR	MA MARITIME ACADEMY	TWO HR	1/8/2002	ADEQUATE REG	1/8/2002				N
4-0016075	229 MAIN ST	NO LOCATION AID	120 DY	2/21/2001	TIER 2	1/23/2002	PHASE IV		Oil	Y

Hazardous Materials Released in the Town of Bourne

RTN	Release Address	Site Name/ Location Aid	Reporting	Notification Date	Compliance Status	Date	Phase	RAO Class	Chemical Type	Files
4-0016216	229 MAIN ST	PHILS AUTO FMR	72 HR	4/23/2001	RTN CLOSED	1/23/2002			Oil	Y
4-0012010	261 MAIN ST	XTRA MART	72 HR	3/13/1996	RAO	3/18/2002	PHASE V	A2	Oil	Y
4-0016962	229-239 MAIN ST	BOURNE COMMUNITY BLDG	72 HR	3/22/2002	RTN CLOSED	4/5/2002			Oil	Y
4-0016893	WEST TRUCK RD	OTIS CS4 DETAIL A	72 HR	2/20/2002	RTN CLOSED	4/19/2002			Oil	Y
4-0017376	TRANSECT 2 AND 3	HUTA	120 DY	1/30/2002	RTN CLOSED	6/10/2002			Hazardous Material	N
4-0017588	HERBERT RD	BA-1 TRAINING AREA	120 DY	1/21/2002	RTN CLOSED	6/10/2002			Hazardous Material	N
4-0017589	BURGOYNE RD	U RANGE	120 DY	4/11/2002	RTN CLOSED	6/10/2002			Hazardous Material	N
4-0017590	BURGOYNE RD	D RANGE	120 DY	6/10/2002	RTN CLOSED	6/10/2002	PHASE II		Hazardous Material	N
4-0016309	POL AST AREA	NO LOCATION AID	TWO HR	6/15/2001	RAO	6/14/2002		A2	Hazardous Material	Y
4-0015786	OFF CLARISSA JOSEPH RD	FLYNN PIG FARM	TWO HR	9/28/2000	RAO	7/1/2002		B1	Oil	Y
4-0017026	RTE 6	SCENIC HWY REST AREA	TWO HR	4/25/2002	RAO	7/16/2002		A2	Oil	Y
4-0016994	5202 LEE RD	COAST GUARD EXCHANGE	72 HR	4/22/2002	RAO	7/17/2002		A2	Oil	Y
4-0000637	SNAKE POND RD	MMRCS 13 CONTRACTORS YARD	NONE	1/15/1989	RAO	7/22/2002		A2		Y
4-0017549	HERBERT RD	BA-1 GRENADE COURTS	120 DY	7/31/2002	ADEQUATE REG	7/31/2002			Hazardous Material	N
4-0013325	227 MAIN ST	NEXT TO BETTY ANNS	TWO HR	9/2/1997	RAO	8/28/2002		B1	Oil	Y
4-0017559	GREENWAY RD	M1RANGE	120 DY	8/27/2002	RTN CLOSED	9/15/2002	PHASE II		Hazardous Material	Y
4-0017562	GIBBS RD	SE RANGE	120 DY	8/27/2002	RTN CLOSED	9/15/2002	PHASE II		Hazardous Material	Y
4-0017563	GIBBS RD	T RANGE	120 DY	8/28/2002	RTN CLOSED	9/15/2002	PHASE II		Hazardous Material	Y
4-0017205	MASSACHUSETTS MILITARY RESERVATION	OFF ROW CURTIS BLVD	TWO HR	7/17/2002	RAO	10/23/2002		A2		Y
4-0001180	282 MAIN ST	SUNOCO SERVICE STATION	NONE	10/15/1992	RAO	11/29/2002	PHASE III	A2	Oil	Y
4-0017548	263 SCAGGY NECK RD	NO LOCATION AID	120 DY	12/24/2002	RAO	12/24/2002		A2	Oil	Y
4-0017333	COUNTY RD	MARION LN	120 DY	9/5/2002	ADEQUATE REG	2/5/2003			Hazardous Material	Y
4-0010373	120 MAIN ST	GROSSMANS FMR	72 HR	4/1/1994	TIER 2	2/21/2003	PHASE IV		Oil	Y
4-0014317	MEETING HOUSE RD	LOT 3	72 HR	11/9/1998	REMOPS	3/12/2003	PHASE V		Oil	Y
4-0017550	MONUMENT BEACH RD	FORMER B RANGE	120 DY	7/29/2002	ADEQUATE REG	3/17/2003	PHASE II		Hazardous Material	Y
4-0017778	WEST OF TURPENTINE RD	HUTA 2 TRANSECT 1	120 DY	3/21/2003	RTN CLOSED	3/21/2003			Hazardous Material	Y
4-0017766	101 ACADEMY DR	SHIP'S BERTH	120 DY	3/24/2003	URAM	4/8/2003			Oil	Y
4-0017593	CHURCH LN	SCENIC HWY	TWO HR	1/24/2003	RAO	4/10/2003		A2		Y
4-0017814	231 SANDWICH RD	JOHN GALLO ICE ARENA	120 DY	5/12/2003	RTN CLOSED	5/13/2003			Hazardous Material	N
4-0017811	5 FORETOP RD	NO LOCATION AID	TWO HR	5/7/2003	RTN CLOSED	6/25/2003			Hazardous Material	Y
4-0017830	ATTPUTEXET RD	POLE 9172/1	TWO HR	6/2/2003	RAO	6/26/2003		A2	Oil	Y
4-0017895	CLEVELANDS LEDGE	BUZZARDS BAY	TWO HR	7/11/2003	ADEQUATE REG	7/11/2003				N
4-0017961	5 CHURCH ST	CANALSIDE MOTEL AT SAGAMORE ROTARY	120 DY	7/21/2003	RAO	10/23/2003		A1	Hazardous Material	Y
4-0000547	RTE 6A PO BOX 311	CANAL BP SERVICE STATION	NONE	9/19/1988	RAO	11/13/2003	PHASE V	A2		Y
4-0018093	MMR-FLIGHT LINE	E6 ON RAMP	TWO HR	10/23/2003	RAO	12/22/2003		A1	Oil	Y
4-0017718	101 ACADEMY DR	NO LOCATION AID	120 DY	3/24/2003	RAO	3/22/2004	PHASE II	B1		Y
4-0017942	829 SHORE RD	NO LOCATION AID	TWO HR	8/4/2003	RAO	5/27/2004		A2	Oil	Y
4-0018417	15 BROOKSIDE RD	TEE #7	TWO HR	5/7/2004	RAO	7/6/2004		A1		Y
4-0017900	455 CIRCUIT AVE	NO LOCATION AID	72 HR	7/15/2003	RAO	7/20/2004		A2	Oil	Y
4-0018581	OFF CUTTYHUNK ISL	SOW & PIGS GATSBY	TWO HR	7/31/2004	ADEQUATE REG	7/31/2004			Oil	N
4-0018507	MACARTHUR BLVD	BOURNE LANDFILL	TWO HR	6/30/2004	RAO	8/27/2004		B1		Y
4-0018009	246 MAIN ST	BUZZARD BAY MOBIL	72 HR	9/5/2003	RTN CLOSED	9/10/2004			Hazardous Material	Y
4-0018673	CPE COD BAY	5 MILES NORTH OF CANAL	TWO HR	9/15/2004	ADEQUATE REG	9/15/2004			Oil	N
4-0018050	2 AND 6 CANAL VIEW RD	FORMER CANAL VIEW AUTO	120 DY	10/2/2003	RAO	10/5/2004		A2	Oil and Hazardous Material	Y
4-0015612	SAGAMORE ROTARY	SORENTI BROS	72 HR	7/19/2000	REMOPS	12/9/2004	PHASE V		Oil	Y
4-0010448	10 LONGHILL RD	CATAUMET GARAGE INC	120 DY	4/28/1994	RAO	1/26/2005		B1	Hazardous Material	Y
4-0018871	101 MAPLE ST	NO LOCATION AID	TWO HR	1/13/2005	RAO	3/16/2005		A2	Oil	Y
4-0019000	51 AND 53 MEETING HSE LN	BOURNE FIRE STA	120 DY	3/25/2005	RAO	6/13/2005		A2	Oil and Hazardous Material	Y
4-0017956	EDWARDS MMR	FUEL PIT @ TURPENTINE RD	TWO HR	8/11/2003	RAO	10/11/2005	PHASE II	A2	Oil	Y
4-0019419	606 MACARTHUR BLVD	TOWERS SERVICE CTR	TWO HR	10/21/2005	RAO	3/16/2006		A1		Y

Hazardous Materials Released in the Town of Bourne

RTN	Release Address	Site Name/ Location Aid	Reporting	Notification Date	Compliance Status	Date	Phase	RAO Class	Chemical Type	Files
4-0019599	SCENIC HWY/CHURCH LN	ROADWAY	TWO HR	2/3/2006	RAO	4/3/2006		A1	Oil	Y
4-0019929	CPE COD CANAL	MARITIME ACADEMY	TWO HR	6/5/2006	ADEQUATE REG	6/5/2006			Oil	N
4-0001197	373 BARLOW SOUTH LANDING RD	CARONS TEXACO STATION	NONE	1/15/1993	REMOPS	6/8/2006	PHASE V			Y
4-0019699	SOUTH TRUCK RD BLDG 330	BLDG 330	TWO HR	4/26/2006	RAO	6/26/2006		A1	Oil	Y
4-0018179	5400 LINDBERG AVE	69MW1708 AT EDWARD C STONE SCHOOL	120 DY	12/17/2003	RAO	6/30/2006	PHASE III	B1	Hazardous Material	Y
4-0019318	1 CANAL RD	SORENTI BROS SHELL STA	72 HR	9/1/2005	RTN CLOSED	8/31/2006			Oil	Y
4-0019966	SANDWICH RD	CANAL RD	TWO HR	8/1/2006	RAO	9/28/2006		A2	Oil	Y
4-0010834	BOURNE ROTARY	GULF GAS STATION	120 DY	10/11/1994	RAO	11/24/2006	PHASE IV	A2	Oil and Hazardous Material	Y
4-0019016	1412 RTE 28A	FORMER S & P SERVICES INC	120 DY	4/5/2005	RAO	3/16/2007	PHASE III	A2	Hazardous Material	Y
4-0020366	1 SHIPYARD LN	KING YAGHT CENTER	TWO HR	3/4/2007	RAO	4/6/2007		A2	Oil	Y
4-0001348	120 MAIN ST	PROPERTY	NONE	10/1/1993	RTN CLOSED	2/12/2008	PHASE III		Oil	Y
4-0020898	678 COUNTY RD	RESIDENCE	TWO HR	11/19/2007	RAO	3/18/2008		A1	Oil	Y
4-0021140	LEE RD	USCG BUILDING 5202	120 DY	3/25/2008	RAO	5/22/2008		A2	Oil and Hazardous Material	Y
4-0013756	1 CANAL RD	SORENTI BROS	120 DY	3/23/1998	RAO	6/16/2008		A2	Hazardous Material	Y
4-0017539	41 LINCOLN AVE	NO LOCATION AID	72 HR	2/25/2003	TIER1D	7/7/2008			Oil	Y
4-0021313	BUILDING 1203	CAMP EDWARDS	TWO HR	6/17/2008	RAO	7/30/2008		A2	Oil	Y
4-0012165	SCENIC HWY	NO LOCATION AID	TWO HR	5/10/1996	DEPNFA	8/26/2008			Oil	Y
4-0021548	AIR STATION CAPE COD	BUILDING 5209	TWO HR	9/26/2008	RAO	11/23/2008		A1		Y
4-0021618	174 MAIN ST	BUZZARDS BAY GARAGE	120 DY	10/28/2008	RTN CLOSED	2/12/2009			Oil	Y
4-0021740	RTE 28A	JP NOONAN FACILITY @ 28A & SCRAGGY NECK	TWO HR	1/14/2009	RAO	3/16/2009		A2	Oil	Y
4-0017786	BUZZARDS BAY OIL SPILL	B NO 120	TWO HR	4/27/2003	RAO	4/27/2009		A2	Oil	Y
4-0021771	21 HEAD OF THE BAY RD	RESIDENCE	TWO HR	1/29/2009	RAO	5/13/2009		A2		Y
4-0022390	201 MACARTHUR BLVD	BOURNE TOWN LANDFILL	TWO HR	1/14/2010	RAO	2/11/2010		A1		Y
4-0021068	174 MAIN ST	BUZZARDS BAY GARAGE	72 HR	2/13/2008	RAO	10/5/2010	PHASE III	A2	Oil and Hazardous Material	Y
4-0014330	5 BOURNE ROTARY	BOURNE ROTARY TEXACO	120 DY	11/9/1998	RAO	11/3/2010	PHASE V	A2	Oil and Hazardous Material	Y
4-0022856	SANDWICH ROAD	WOODED AREA NEAR REST AREA	TWO HR	9/14/2010	RAO	11/8/2010		A2		Y
4-0023196	ROUTE 6A	ON RAMP TO MID CAPE HIGHWAY	TWO HR	4/7/2011	RAO	5/26/2011		A1	Oil	Y
4-0023190	23B BOXWOOD COURT	BOURNE OAKS	TWO HR	3/30/2011	RAO	6/6/2011		A2	Oil	Y
4-0023501	CONNERY AVE	CAMP EDWARDS TACTICAL TRNG BASE KELLEY	TWO HR	8/24/2011	RAO	10/21/2011		A2	Oil	Y
4-0000335	RTE 6 ROTARY	BOURNE EXXON STATION 3 5693	NONE	1/15/1987	RAO	11/30/2011	PHASE V	TN		Y
4-0023047	SOUTH OUTER ROAD	OTIS AIR NATIONAL GUARD BASE	TWO HR	1/5/2011	TIER1D	1/12/2012			Oil	Y
4-0023559	59 ADAMS STREET	RESIDENCE	TWO HR	9/15/2011	RAO	2/2/2012		A2	Oil	Y
4-0023279	851 SANDWICH ROAD	PAIRPOINT GLASSWORKS	120 DY	5/17/2011	TIER1D	5/24/2012			Hazardous Material	Y
4-0023693	BOURNE BRIDGE APPROACH STREET	NEAR BORNE BRIDGE	TWO HR	11/26/2011	RAO	6/14/2012		A1		Y
4-0023238	89 HUNTER'S BROOK ROAD	RESIDENCE	TWO HR	4/29/2011	RAO	11/9/2012	PHASE II	A2	Oil	Y
4-0024311	BURGE BLVD	USCG AIR STATION CAPE COD	TWO HR	11/14/2012	RAO	1/14/2013		A2	Oil	Y
4-0024343	291 HEAD OF THE BAY ROAD	RESIDENCE	TWO HR	12/19/2012	RAO	2/26/2013		A2	Oil	Y
4-0024470	OFF MAIN STREEET	ISLAND CHANNEL	TWO HR	3/21/2013	RAO	5/13/2013		A1		Y
4-0024583	1412 RT 28A	S&P SERVICE	72 HR	5/31/2013	RAO	7/30/2013		A1	Oil	Y
4-0024643	CONNERY AVE	MMR	TWO HR	6/26/2013	RAO	8/26/2013		A2	Oil	Y
4-0024870	169 CLAY POND RD	CREATIVE STONE SYSTEMS	TWO HR	11/7/2013	RAO	1/7/2014		A2	Hazardous Material	Y
4-0024908	WIND TURBINE #2 SITE	CC AIR FORCE STATION - PAVE PAWS	TWO HR	12/2/2013	RAO	1/31/2014		A1		Y
4-0024932	25 PERRY AVENUE	BUSTED KNUCKLE GARAGE	120 DY	1/6/2014	RAO	1/31/2014		A2	Oil and Hazardous Material	Y
4-0000576	1030 SANDWICH RD	TEXACO SERVICE STATION	NONE	10/15/1988	REMOPS	2/22/2014	PHASE V		Oil	Y
4-0024972	1025 SANDWICH ROAD	JOHNS CAPESIDE DINER	72 HR	2/18/2014	DPS	2/28/2014			Hazardous Material	Y
4-0025016	1412 = 28A	LOUD FUEL	TWO HR	3/1/2014	PSNC	4/30/2014		PN	Oil	Y
4-0025053	IN FRONT OF 5 CRANBERRY HWY	OFF ROUTE 6	TWO HR	4/9/2014	PSNC	6/7/2014		PN	Oil	Y
4-0001214	1050 SANDWICH RD	KNOWLTONS SALVAGE YARD	NONE	7/10/1992	TMPS	9/11/2014	PHASE IV	TF		Y
4-0025101	85 OLD NORTH ROAD	SUMMER RESIDENCE	TWO HR	4/29/2014	PSNC	4/28/2015		PN	Oil	Y
4-0001334	246 MAIN ST	BUZZARDS BAY BP STATION	NONE	10/1/1993	PSNC	9/1/2015		PN		Y

Hazardous Materials Released in the Town of Bourne

RTN	Release Address	Site Name/ Location Aid	Reporting	Notification Date	Compliance Status	Date	Phase	RAO Class	Chemical Type	Files
4-0025686	300 MAIN STREET	WAY HO RESTAURANT	TWO HR	7/10/2015	PSNC	9/8/2015		PN		Y
4-0025707	45 STATE ROAD	MASS DOT FACILITY	TWO HR	7/22/2015	PSNC	9/18/2015		PN		Y
4-0025739	1 FACTORY OUTLET ROAD	MARKET BASKET	TWO HR	8/7/2015	PSNC	10/5/2015		PN		Y
4-0025449	20 BAY DRIVE	TAYLORS POINT	TWO HR	1/1/2015	PSNC	11/11/2015		PN	Oil	Y
4-0025608	428 BARLOWS LANDING ROAD	RESIDENCE	72 HR	5/11/2015	PSNC	3/7/2016		PN	Oil	Y
4-0025556	ROUTE 6	BOURNE ROTARY	TWO HR	3/25/2015	PSNC	3/22/2016		PN	Oil	Y
4-0026181	81 HUNTER'S BROOK ROAD	RESIDENCE	TWO HR	7/6/2016	UNCLASSIFIED	6/30/2016				Y
4-0021520	TANK ALY	CAMP EDWARDS	CENTRAL	TWO HR	9/17/2008	RAO	11/14/2008		A2	
4-0013496		BLDGS 197	196	192	162	TWO HR	11/19/1997	RAO	1/9/1998	

Source: <http://public.dep.state.ma.us/SearchableSites2/Search.aspx>. Obtained 10/12/2016.

APPENDIX F

ADA Self Evaluation

Town of Bourne ADA Self-Evaluation Report



January 30, 2018

Prepared for:
Town of Bourne
Open Space and Recreation
Committee

Prepared by:
Horsley Witten Group, Inc.

TABLE OF CONTENTS

Introduction..... 1

Part I: Administrative Requirements 1

 Designation of an ADA Coordinator 1

 Public Notification Requirements 1

 Participation of Individuals with Disabilities or Organizations Representing the Disable Community ... 1

Part II: Employment Practices 2

Part III: Program Accessibility 2

 Facility Inventory 2

 Arthur Avenue Beach/Chester Park (Map 30.4, Lot 25) 3

 Back River Conservation Area (Map 26, Lot 11) 4

 Barlows Landing Beach/Conservation Area (Map 43.1, Lot 53) 4

 Bassett’s Island Landing (Map 46, Lot 3)..... 4

 Bay Vista Conservation Area (Map 38.2, Lot 120) 4

 Bourne Inclusive Playground – Canal Crossings Path (Map 23.2, Lot 122) 5

 Bourne Memorial Community Building (Map 20.3, Lot 98)..... 5

 Bourne Public Library Recreational Fields (Map 24.3, Lot 17) 5

 Burtonwood Conservation Area (Map 30.2, Lot 68) 5

 Butler Memorial Park (Map 19.3, Lot 283) 5

 Buzzards Bay Beach and Electric Avenue Boat Launch (Map 19.3, Lot 75)..... 6

 Buzzards Bay Park (Map 23, Lot 4) 6

 Carter Beal Conservation Area (Map 10, Lot 70)..... 6

 Circuit Avenue Conservation Area (Map 43.3, Lot 127)..... 7

 Clark Field (Map 4.3, Lot 131) 7

 Clark Pond (Map 7.1, Lot 6) 7

 Clay Pond Conservation Area (Map 31.4, Lot 9) 7

 Clifton Broyer Conservation Area (Map 51.2, Lot 15)..... 8

 Eel Pond Beachway (Map 30.2, Lot 171)..... 8

 Eel Pond Conservation Area (Map 30.2, Lot 188)..... 8

 Eldridge Memorial Park/Queen Sewell Park (Map 19.4, Lot 200)..... 8

 Four Ponds Conservation Area (Map 39, Lot 11)..... 9

 Gray Gables Beach (Map 26.1, Lot 185) 9

 Hen Cove Beach (Map 43.3, Lot 265) 9

 Hope Springs Conservation Area (Map 54, Lot 26) 9

Hostetter/Largay Property (Map 27, Lot 40)	10
Island Drive (Map 43.3, Lot 41)	10
John F Stackpole Memorial Park (Map 26.2, Lot 63).....	10
Keith Field (Map 11.4, Lot 10)	10
Leary Property (Map 31, Lot 3)	10
Little Buttermilk Bay (Map 15.3, Lot 11).....	11
Little Buttermilk Bay #2 (Map 19.2, Lot 3).....	11
Monks Marine Park (Map 38, Lot 1)	11
Monument Beach Marina (Map 34, Lot 53)	11
Nightingale Pond Conservation Area (Map 20, Lot 54)	12
Perry Marsh (Map 27, Lot 41)	12
Perry Property (Map 31.1, Lot 36).....	12
Picture Lake Access (Map 34, Lot 53)	12
Pocasset Heights Property (Map 43.3, Lot 17, 17.1)	12
Pocasset River Conservation Area (Map 38, Lot 15)	12
Pocasset Town Forest (Map 35, Lot 9)	13
Post Office Playground (Washington Park) (Map 51.2, Lot 9.01)	13
Queen Sewell Cove (Map 20.1, Lot 55)	13
Robinson Conservation Area (Map 51.2, Lot 69).....	13
Sagamore Highlands (Map 2.1, Lot 1).....	13
Sand Spit Conservation Area (Map 47.1, Lot 19).....	14
Shore Road Ballfields and Conservation Area (Map 34, Lot 31)	14
Squeteague Harbor Beach (Map 51.3, Lot 62)	14
Sagamore Beach “The Strand”	14
Town Forest (Map 35, Lot 19).....	15
Veteran Memorial Park/Town Hall (Map 24.1, Lot 10)	15
Whitmore Playground (Map 43.2, Lot 7)	15
Willett Circle Conservation Area (Map 51.4, Lot 118)	15
Wings Neck Conservation Area (Map 42.2, Lot 1)	16
Summary of Inventory Recommendations	16
Part IV: Transition Plan	17
Public Input.....	17
Transition Plan.....	17

APPENDICES

Appendix A - Official Designation Letter for the ADA Coordinator

Appendix B – Bourne Equal Opportunity Employer Clause

Appendix C – ADA Self-Evaluation Worksheets

Introduction

The Horsley Witten Group, Inc. (HW) has prepared this American with Disabilities Act (ADA) Self-Evaluation on behalf of the Town of Bourne's Open Space and Recreation Committee. An ADA Self-Evaluation is a required component of all Open Space and Recreation Plans.

The Americans with Disabilities Act, enacted in 1990, states that *no qualified individual with a disability shall, by reason of such disability, be excluded from participation in or be denied the benefits of the services, programs, or activities of a public entity, or be subjected to discrimination by any public entity* (35 CFR Part 35.130(a)). An important method to ensuring compliance with this law is the ADA Self-Evaluation.

The ADA Self-Evaluation is a detailed assessment used to determine how accessible a community's conservation and recreation properties and programs are to persons with disabilities. The evaluation looks at both administrative and employment practices of the recreation department and conservation commission, as well as includes a site-by-site inventory of all properties and programs. The self-evaluation identifies any issues and recommends improvements. A transition plan is developed if structural changes are recommended. The recommendations are intended to make recreation and conservation properties and programs more accessible, as well as result in more comfortable and safer areas.

Part I: Administrative Requirements

Designation of an ADA Coordinator

The ADA Coordinator for the Town of Bourne is:

Thomas Guerino
Town Administrator
24 Perry Avenue, Room 101
Buzzards Bay, MA 02532

Phone: 508-759-0600

Email: tguerino@townofbourne.com

The official designation letter for the ADA Coordinator is attached in Appendix A.

Public Notification Requirements

Town of Bourne employees and the public were notified that the community does not discriminate on the basis of disability. Meeting notifications are posted on the town's website, in Town Hall, and in the Bourne Community Building.

Participation of Individuals with Disabilities or Organizations Representing the Disable Community

On December 12, 2017, the Town met with the Bourne Committee on Disability to discuss the preliminary results of the ADA Self-Evaluation and to request feedback on the draft transition plan matrix. The Committee reviewed the draft ADA Self-Evaluation Report, including the transition plan matrix, and was pleased with the thorough report. The Committee provided a few suggestions to change site priorities in the transition plan, based on their knowledge and use of the sites. In addition to this ADA

Self-Evaluation, the Committee has a member inventorying the accessible parking situation at every Town recreation site, some of which may be beyond the scope of this report, which will help them decide future improvements. This ongoing work demonstrates their willingness to contribute their expertise to make the necessary accessibility improvements to Town areas. During the meeting, the Committee discussed how they could become more involved with the Town in ensuring new projects include accessibility and inclusive design, and updating current sites to be more accessible. The Committee will talk to the Town to see how they can take ownership over some of these projects or be included in the decision making for these future projects.

Part II: Employment Practices

The ADA Coordinator for the Town of Bourne has signed a statement attesting to the town's employment practices are in compliance with the ADA. The statement is attached in Appendix B.

Part III: Program Accessibility

Facility Inventory

As this ADA Self-Evaluation was completed as a required component of the Open Space and Recreation Plan, the facility inventory was done on all facilities under the jurisdiction of the recreation department or conservation commission.

The Town of Bourne owns and operates approximately 1,500 acres of conservation land and recreational resources. This does not include land managed by the local water districts to protect the Town's public drinking water. In July 2017, HW staff conducted site assessments of outdoor recreational facilities throughout the Town of Bourne. The assessment covered the following sites because these sites are either: 1) maintained by the Town's Conservation Commission and/or Recreation Department (through the Department of Public Works), 2) have amenities or resources located at the site (e.g., parking lots, restrooms, trails), and 3) the Town has plans to include amenities at the site in the future:

- Arthur Avenue Beach/Chester Park (Map 30.4, Lot 25)
- Back River Conservation Area (Map 26, Lot 11)
- Barlows Landing Beach/Conservation Area (Map 43.1, Lot 53)
- Bassett's Island Landing (Map 46, Lot 3)
- Bay Vista Conservation Area (Map 38.2, Lot 120)
- Canal Crossings Path - Bourne Inclusive Playground (Map 23.2, Lot 122)
- Bourne Memorial Community Building (Map 20.3, Lot 98)
- Bourne Public Library Recreational Fields (Map 24.3, Lot 17)
- Burtonwood Conservation Area (Map 30.2, Lot 68)
- Butler Memorial Park (Map 19.3, Lot 283)
- Buzzards Bay Beach and Electric Avenue Boat Launch (Map 19.3, Lot 75)
- Buzzards Bay Park (Map 23, Lot 4)
- Carter Beal Conservation Area (Map 10, Lot 70)
- Circuit Avenue Conservation Area (Map 43.3, Lot 127)
- Clark Field (Map 4.3, Lot 131)
- Clark Pond (Map 7.1, Lot 6)
- Clay Pond Conservation Area (Map 31.4, Lot 9)
- Clifton Boyer Conservation Area (Map 51.2, Lot 15)
- Eel Pond Beachway (Map 30.2, Lot 171)
- Eel Pond Conservation Area (Map 30.2, Lot 188)

Eldridge Memorial Park/Queen Sewell Park (Map 19.4, Lot 200)
 Four Ponds Conservation Area (Map 39, Lot 11)
 Gray Gables Beach (Map 26.1, Lot 185)
 Hen Cove Beach (Map 43.3, Lot 265)
 Hope Springs Conservation Area (Map 54, Lot 26)
 Hostetter/Largay Property (Map 27, Lot 40)
 Island Drive (Map 43.3, Lot 41)
 John F Stackpole Memorial Park (Map 26.2, Lot 63)
 Keith Field (Map 11.4, Lot 10)
 Leary Property (Map 31, Lot 3)
 Little Buttermilk Bay (Map 15.3, Lot 11)
 Little Buttermilk Bay #2 (Map 19.2, Lot 3)
 Monks Marine Park (Map 38, Lot 1)
 Monument Beach Marina (Map 34, Lot 53)
 Nightingale Pond Conservation Area (Map 20, Lot 54)
 Perry Marsh (Map 27, Lot 41)
 Perry Property (Map 31.1, Lot 36)
 Picture Lake Access (Map 34, Lot 53)
 Pocasset Heights Property (Map 43.3, Lot 17, 17.1)
 Pocasset River Conservation Area (Map 38, Lot 15)
 Pocasset Town Forest (Map 35, Lot 9)
 Post Office Playground (Washington Park) (Map 51.2, Lot 9.01)
 Queen Sewell Cove (Map 20.1, Lot 55)
 Robinson Conservation Area (Map 51.2, Lot 69)
 Sagamore Highlands (Map 2.1, Lot 1)
 Sand Spit Conservation Area (Map 47.1, Lot 19)
 Shore Road Ballfields and Conservation Area (Map 34, Lot 31)
 Squeateague Harbor Beach (Map 51.3, Lot 62)
 Sagamore Beach “The Strand”
 Town Forest (Map 35, Lot 19)
 Veteran Memorial Park/Town Hall (Map 24.1, Lot 10)
 Whitmore Playground (Map 43.2, Lot 7)
 Willett Circle Conservation Area (Map 51.4, Lot 118)
 Wings Neck Conservation Area (Map 42.2, Lot 1)

For each site, HW completed the ADA Self-Evaluation checklist. These forms are located in Appendix C.

Arthur Avenue Beach/Chester Park (Map 30.4, Lot 25)

Location: Arthur Avenue Road and Monument Road, Pocasset

With a boat ramp, athletic field, playground, tennis courts and basketball courts. This parcel also provides access to Phinney’s Harbor.

2007 Update: Parking spaces, play areas and ramps and trails all need attention. A handicapped van space and sign is needed near the play area and an accessible route to the play area and beach is also needed.

2017 Update: No changes have been made since 2007. There is no designated parking lot for this site. The following improvements are recommended:

- Install one handicapped standard space and one handicapped van space with appropriate signage.

- Improve access to the beach, play area, and basketball courts by constructing route with compacted gravel or pavement/concrete. The Town is planning to place a beach mat at Chester Park for people to access the play area.

Back River Conservation Area (Map 26, Lot 11)

Location: Accessible off Quiet Cove Lane

Located along the Back River and part of the Bourne Back River ACEC, just south of the Cape Cod Canal, possesses outstanding natural resources.

2017 Update: This area does not have amenities or a designated parking lot, which limits opportunities to improve accessibility. Overall, the Town does not intend on making public access improvements to the site.

Barlows Landing Beach/Conservation Area (Map 43.1, Lot 53)

Location: Barlows Landing Road, Pocasset

1.13 acres containing a recreational beach, boat ramp, fishing, shellfish area and parking, abutting Pocasset Harbor.

2007 Update: Parking, the picnic area and accessibility routes need to be addressed. Add a handicapped van aisle and sign and add a handicapped accessible picnic table and pad.

2017 Update: No changes have been made since 2007. The following improvements are recommended:

- Stripe pavement adjacent to the handicapped space to indicate the access aisle.
- Install one handicapped van parking space with appropriate signage.
- Construct an accessible path to the beach and picnic area of compacted gravel or pavement.
- Install a handicapped accessible picnic table and associated platform.

Bassett's Island Landing (Map 46, Lot 3)

Located in Cataumet within the Pocasset Harbor contains 16.0 acres of beautiful natural barrier beach, sand dunes and shellfish area. This basically isolated island recreational uses, such as boating, fishing, swimming, nature observation, picnicking and shellfishing. The location precludes many from using this area, due to the limited access.

2007 Update: No change.

2017 Update: Due to its remoteness, this site was not assessed.

Bay Vista Conservation Area (Map 38.2, Lot 120)

Location: Valley Bars Road and Shore Road

Contains 9.12 acres of conservation land and walking trails with beach and swimming access. There are three different parking areas for the different trails and beach areas.

2017 Update: The play and game areas have been reconstructed and provide adequate access. The following improvements are recommended:

- Install accessible parking spaces and associated signage on all three parking areas and improve parking surface for those spaces.
- Install a handicapped accessible beach mat on beach surface.
- Remove vegetation on trail paths and improve surface, widen areas of the path that are narrower than 5 feet.

Bourne Inclusive Playground – Canal Crossings Path (Map 23.2, Lot 122)

Location: Main Street, Buzzards Bay

The lot is 5.05 acres of land adjacent to the post office on Main Street. There is a playground and walking trails, as well as benches and a parking lot.

2017 Update: The parking lot has designated accessible parking spaces and the trail is of adequate width, grade, and surface material. The playground is inclusive and accessible. No recommendations are made at this time.

Bourne Memorial Community Building (Map 20.3, Lot 98)

Location: Main Street, Buzzards Bay

Contains 5.85 acres consisting of baseball and softball fields, football/soccer fields, tennis courts, basketball courts, playground and tot lot. Within the community building is a gymnasium, pool tables, ping-pong tables, stage, and other organized activities. This building is also the home for the Council on Aging offering a variety of senior-oriented programs and activities. In addition, the building is used for a number of Town board and committee meetings.

2007 Update: Parking spaces, play areas, picnic tables and accessible paths need to be addressed. The play surface at the playground needs to be repaired, one handicapped space and sign needs to be installed near the play area and an accessible route to the play area needs to be added. Access needs to be provided to picnic tables.

2017 Update: The play and game areas have been reconstructed and provide adequate access.

Bourne Public Library Recreational Fields (Map 24.3, Lot 17)

Location: Behind the Library on Perry Ave

Contains 3.91 acres consisting of baseball and softball fields and a multi-use field with a parking area.

2017 Update: The parking area is unimproved and has no designated accessible parking spaces. There is no accessible path to the fields or around the field. The following improvements are recommended:

- Improve the parking lot surface with compacted gravel or pavement.
- Designate accessible parking space with associated signage.
- Construct an accessible path leading to and around the fields as needed.

Burtonwood Conservation Area (Map 30.2, Lot 68)

Location: Central Boulevard, Monument Beach

A 1.11 acre parcel located in the village of Monument Beach, with a salt water marsh and upland abutting Eel Pond. This area features walking, nature observation and wildlife habitat, and is located in the Back River, Area of Critical Environmental Concern.

2007 Update: No change.

2017 Update: No change.

Butler Memorial Park (Map 19.3, Lot 283)

Location: Kayajan Avenue, Buzzards Bay

With a baseball field, playground, basketball courts, picnic tables and tennis courts.

2007 Update: Parking spaces, play areas and ramps, picnic areas and trails all need attention. A handicapped van space and sign is needed, all routes to the playground equipment could be improved and accessible picnic tables are needed.

2017 Update: This area does not have a designated parking lot, which limits opportunities to improve accessibility. No changes have been made since 2007. The following improvements are recommended:

- Designate one accessible parking space with appropriate access aisle and associated signage along the residential road.
- Improve access to the park and play areas by constructing a path from compacted gravel or pavement.

Buzzards Bay Beach and Electric Avenue Boat Launch (Map 19.3, Lot 75)

Location: Gardinier Avenue, Buzzards Bay

Contains approximately 1.02 acres with a recreational beach, boat ramp, slips and moorings.

2007 Update: Parking spaces, play areas, picnic areas and accessible trails all need to be addressed. A handicapped van space and regular space need to be relocated to the lawn side of the parking area and to provide an accessible route onto the beach. An accessible route needs to be provided to the swing area.

2017 Update: No changes have been made since 2007. The Town has preliminary plans to improve access at this location, include use of a ramp and beach mats. The following improvements are recommended:

- Install signage for the two handicapped parking spaces.
- Install one handicapped van parking space with appropriate signage.
- Relocate at least one of the handicapped spaces to a location closer to the playground.
- Replace the stairs access to the beach with a handicapped accessible ramp with railings.
- Construct an accessible route to the swings.

Buzzards Bay Park (Map 23, Lot 4)

Location: Main Street, Buzzards Bay

With a picnic area, benches, gazebo, parking and also provides access to the Cape Cod Canal. This area is also used for many organized events such as weddings and the Scallop Festival. The park was under construction at the time of the site visit.

2007 Update: A handicapped van parking sign at the existing space is needed near the Canal entrance. A ramp should be installed at the gazebo and an accessible picnic table should be added as well as a paved route.

2017 Update: No changes have been made since 2007. During the site evaluation, the area was under construction. The following improvements are recommended:

- Install a handicapped van space close to the Canal entrance.
- Install a handicapped accessible picnic table and associated platform. Construct a paved access path to the handicapped accessible picnic table.
- Ensure that the new construction of the park includes handicap accessible paths to the gazebo and other areas of interest.

Carter Beal Conservation Area (Map 10, Lot 70)

Location: Bournedale Road, Bournedale

Located in Bournedale on 3.10 acres of prime conservation land. This area is located within the Commonwealths designated Herring Rive Area of Critical Concern. This property also features walking and nature observation, a park with a herring run and waterways.

2007 Update: There are no dedicated handicapped parking spaces or handicapped accessible trails. Adding a handicapped van space and sign would be appropriate, in addition making a handicapped accessible path or ramp to the footbridge and/or bench.

2017 Update: No changes have been made since 2007. The following improvements are recommended:

- Install one handicapped parking space with appropriate signage.
- Construct handicapped access trails to the footbridges.

Circuit Avenue Conservation Area (Map 43.3, Lot 127)

Location: Accessible from Circuit Avenue

2017 Update: This area does not have amenities or a designated parking lot, which limits opportunities to improve accessibility. The Town has no future plans to improve the site; therefore, no recommendations are made at this time.

Clark Field (Map 4.3, Lot 131)

Location: Clark Road, Sagamore Beach

With athletic fields, baseball fields, basketball courts, playground/tot lot and tennis courts. The restrooms were closed at the time of the site visit.

2007 Update: Stripe the handicapped parking spaces and make accessible play areas/ramps or water fountains. Designating a handicapped van space and aisle with striping and signage, installing a concrete path at sloped access ways to prevent erosion and providing a firm surface to the play area is needed.

2017 Update: No changes have been made since the 2007 assessment. The following improvements are recommended:

- Pave a path to connect the trail that circumnavigates the site.
- Stripe the area next to the handicapped spaces in order to provide the appropriate access aisle.
- Install appropriate signage for the two designated handicapped spaces.
- Install a handicapped van space or replace a standard space with a van space and include appropriate signage.
- Improve access to the play area by paved path or firm surface.
- Pave access to the basketball courts.

Clark Pond (Map 7.1, Lot 6)

Location: Standish Road, Sagamore Beach

Located in North Sagamore totaling 1.68 acres. This conservation area features a fresh water pond, fresh water marsh with wildlife habitat. There are no developed facilities on this site however the site is available for observation of its natural features.

2007 Update: No change.

2017 Update: No change. This area does not have amenities or a designated parking lot, which limits opportunities to improve accessibility. The Town has no future plans to improve the site; therefore, no recommendations are made at this time.

Clay Pond Conservation Area (Map 31.4, Lot 9)

Location: Accessible off Clay Pond Road

Located behind residential homes.

2017 Update: This area does not have amenities or a designated parking lot, which limits opportunities to improve accessibility. The Town has no future plans to improve the site; therefore, no recommendations are made at this time.

Clifton Broyer Conservation Area (Map 51.2, Lot 15)

Location: Off of Depot Road

Located in Cataumet between Depot Road and the Penn Central Rail Road. This 12.85-acre parcel features an upland forest, park, nature observation, foot trails for walking and horseback riding. This area lies within the Bourne Water Resource District-A-North and is tied in with Bourne Conservation Trust Property.

2007 Update: No change.

2017 Update: No change.

Eel Pond Beachway (Map 30.2, Lot 171)

Location: 55-63 Eel Pond Road

The site is a 0.25 acre parcel that is located in a residential neighborhood that serves as access for canoes/kayaks and for viewing Eel Pond. Parking is provided for approximately four cars.

2017 Update: There is no designated accessible parking and the parking area and the path leading to the pond is loose sand and silt. The following improvements are recommended:

- Improve the parking surface of the parking lot and designate an accessible space with appropriate signage.
- Improve site access to the pond by using compacted gravel or pavement for the path.

Eel Pond Conservation Area (Map 30.2, Lot 188)

Location: Accessible off Wings Neck Road

Located in residential neighborhood.

2017 Update: This area does not have amenities or a designated parking lot, which limits opportunities to improve accessibility. The Town has no future plans to improve the site; therefore, no recommendations are made at this time.

Eldridge Memorial Park/Queen Sewell Park (Map 19.4, Lot 200)

Location: Cranberry Road, Buzzards Bay

With baseball field, playground, basketball courts, picnic tables and tennis courts.

2007 Update: Parking spaces, play areas and ramps, picnic areas and trails all need attention. A handicapped van space and sign is needed, all route to the playground equipment could be improved and accessible picnic tables are needed.

2017 Update: There are no designated handicapped parking spaces. Access paths to the playground and fields need to be improved. The following improvements are recommended:

- Install at least one handicapped standard space and one handicapped van space with associated signage.
- Improve access to the playground by removing the interior fence at the entrance, removing nearby boulders and constructing a more level or paved path.
- Improve access to the spectator seating and ball field by constructing a more level or paved path.

Four Ponds Conservation Area (Map 39, Lot 11)

Location: Barlows Landing Road, Pocasset

It is also known as the Green Property, this area features fresh water marshes, wildlife habitat, and is critical to water supply, designated by the Commonwealth as an Area of Critical Environmental Concern. This conservation area has no developed facilities and contains four ponds, Shop Pond, The Basin, Freeman Pond, and Upper Pond, which form the headwaters of the Pocasset River.

2007 Update: Parking lot still had no restricted parking.

2017 Update: No change. Parking lot still remains unimproved with a mix of sand and gravel, with no designated/marked handicapped parking spaces. The following improvements are recommended:

- Install at least one handicapped standard space and one handicapped van space with associated signage.

Gray Gables Beach (Map 26.1, Lot 185)

Location: Gilder Road

Contains 4.3 acres with a recreational beach, shellfish area, boat ramp, moorings, fishing and parking, abutting Cape Cod Canal.

2007 Update: Parking, the picnic area and accessibility routes need to be addressed. Add a handicapped sign on the existing post and provide a curb cut route to the beach. Add a handicapped accessible picnic table and pad.

2017 Update: No changes have been made since 2007. The Town reports that a beach mat is being used at this site to improve access from the parking lot to the beach area. The following improvements are recommended:

- Construct a curb cut to the beach in order to provide an accessible pathway from the parking lot to the beach.

Hen Cove Beach (Map 43.3, Lot 265)

Location: Circuit Avenue, Pocasset

Located in Pocasset, contains 2.20 acres, consisting of a sandy beach, shellfish area, boat moorings, and fishing.

2007 Update: A handicapped van sign and space is needed.

2017 Update: No change has been made since 2007. The following improvements are recommended:

- Install a handicapped van space and sign.

Hope Springs Conservation Area (Map 54, Lot 26)

Location: Intersection of Megansett Road and Pine Hill Road

Potential for access to Squeteague Harbor.

2017 Update: This area does not have amenities or a designated parking lot, which limits opportunities to improve accessibility. The Town has no future plans to improve the site; therefore, no recommendations are made at this time.

Hostetter/Largay Property (Map 27, Lot 40)

Location: County Road, Monument Beach

Located on County Road containing 9.44 acres, and is adjacent to the Leary and Perry properties. The area was purchased with the agreement to remain in its natural state. This area provides the users with sightseeing, nature study and a salt-water marsh.

2007 Update: No change.

2017 Update: No change. Because the purchase agreement requires the site is to remain in its natural state, this limits opportunities to improve accessibility. No recommendations are made at this time.

Island Drive (Map 43.3, Lot 41)

Location: Intersection of Island Drive and Circuit Avenue

Isolated pond with no visible access.

2017 Update: This area does not have amenities or a designated parking lot, which limits opportunities to improve accessibility. The Town has no future plans to improve the site; therefore, no recommendations are made at this time.

John F Stackpole Memorial Park (Map 26.2, Lot 63)

Location: President's Toad and Monument Neck Road

The site is a public park that is 0.54 acres on the corner of President's road and Monument Neck Road. There is no parking at this site, and no benches, paths, or picnic areas.

2017 Update: This area does not have amenities or a designated parking lot, which limits opportunities to improve accessibility. The Town has no future plans to improve the site; therefore, no recommendations are made at this time.

Keith Field (Map 11.4, Lot 10)

Location: 861 Sandwich Road, Sagamore

With baseball field, tennis courts, spectator seating and food concession.

2007 Update: There are no dedicated handicapped parking spaces or accessible play areas/ramps or water fountains. Designating a handicapped van space and aisle with striping and signage, adding a firm surface to the field, tennis courts and bleachers and accessibility to the bathroom stalls, sinks and water found would be appropriate.

2017 Update: No changes have been made since 2007. The following improvements are recommended:

- Install one standard accessible parking space and appropriate signage.
- Install one accessible van parking space and appropriate access aisle and signage.
- Construct an accessible pathway from the parking lot to the fields, spectator seating and bathrooms.

Leary Property (Map 31, Lot 3)

Location: 216 County Road, Monument Beach

This natural environment area contains 23.84 acres and features a salt water marsh in Back River and nature study area with trails to the salt water marsh.

2007 Update: There are no dedicated handicapped parking spaces or handicapped accessible trails. Adding a handicapped van space and sign would be appropriate, in addition to making the path to the bench/trail accessible.

2017 Update: No change. 2007 recommendations stand.

Little Buttermilk Bay (Map 15.3, Lot 11)

Location: Accessible off Little Bay Lane

A salt marsh, not developed.

2017 Update: This area does not have amenities or a designated parking lot, which limits opportunities to improve accessibility. The Town has no future plans to improve the site; therefore, no recommendations are made at this time.

Little Buttermilk Bay #2 (Map 19.2, Lot 3)

Location: Accessible off Snow Circle

A salt marsh, not developed.

2017 Update: This area does not have amenities or a designated parking lot, which limits opportunities to improve accessibility. The Town has no future plans to improve the site; therefore, no recommendations are made at this time.

Monks Marine Park (Map 38, Lot 1)

Location: Shore Road, Pocasset

Contains approximately 13.79 acres and is partially located within the Bourne Water Resource District-A North. This park consists of upland forest, a beach, boat ramp, boat slips, moorings and shellfish area abutting Little Bay.

2007 Update: Parking and accessible routes need to be addressed. A handicapped van space and sign should be added and accessibility to trails should be improved.

2017 Update: No change. 2007 recommendations stand.

Monument Beach Marina (Map 34, Lot 53)

Location: Emmons Road, Monument Beach

Containing 6.70 acres including a recreational beach, marina, snack bar, restrooms, two boat ramps, shellfish area, moorings and parking, abutting Phinney's Harbor. The restrooms and snack bar were closed at the time of the site visit.

2007 Update: The picnic table and accessible routes need to be addressed. Accessibility to the beach area should be improved and an accessible mirror in the restroom is needed. A handicapped accessible picnic table and pad is needed.

2017 Update: There are two handicapped spaces located all the way on the left of the parking lot, far away from the marina access and snack bar/restrooms. The Town has plans to make the second boat ramp accessible. There will be a lift chair to provide access to the boats from the ramp. An accessible beach mat is in use at this site, but it could be extended more to provide access all the way to the water. The following improvements are recommended:

- Install a handicapped van space and sign.
- Install a handicapped accessible picnic table and associated platform near the other picnic tables.

Nightingale Pond Conservation Area (Map 20, Lot 54)

Location: Deseret Drive

The parcel is 23 areas of conservation surrounding Nightingale Pond. The conservation access is in a residential area with no parking. The conservation area contains trails and a location to put a small boat into the pond.

2017 Update: There is no designated parking lot, and the trails are steep, narrow, and have rough terrain, all of which limit opportunities to improve accessibility for individuals with disabilities. No recommendations are made at this time.

Perry Marsh (Map 27, Lot 41)

Location: Accessible off County Road

A salt marsh, not developed.

2017 Update: This area does not have amenities or a designated parking lot, which limits opportunities to improve accessibility. The Town has no future plans to improve the site; therefore, no recommendations are made at this time.

Perry Property (Map 31.1, Lot 36)

Location: Accessible off County Road

A non-developed area.

2017 Update: This area does not have amenities or a designated parking lot, which limits opportunities to improve accessibility. The Town has no future plans to improve the site; therefore, no recommendations are made at this time.

Picture Lake Access (Map 34, Lot 53)

Location: O Lake Drive

Picture Lake access is a 1.25 acre beach that accesses Picture Lake. There is a parking lot off Old County Road but it is dirt and there are no designated parking spaces. The only amenities are the swimming beach.

2017 Update: Picture lake access has no parking onsite. The sandy beach abuts the roadway and there are no curb cuts or accessible entrances onto the beach. The following improvements are recommended:

- Improve access to the beach by creating curb cuts in the side of the road and installing an accessible beach mat.
- Remove barriers blocking cars from beach to allow adequate width for accessible pathways.
- Clear vegetation and create accessible parking with designated signage adjacent to beach.
- If appropriate, designate one accessible parking space on the side of the road.

Pocasset Heights Property (Map 43.3, Lot 17, 17.1)

Location: Pocasset

2017 Update: Pedestrian access, but no designated parking lot. Any future improvements the Town will make to improve overall access to the site should include amenities for individuals with disabilities.

Pocasset River Conservation Area (Map 38, Lot 15)

Location: Shore Road and County Road, Pocasset

Contains 28.1 acres, this area features a salt water and fresh water marsh and is an important flood control area. This area provides many with passive recreation of fishing and hunting.

2007 Update: There are no dedicated handicapped parking spaces or handicapped accessible trails. Adding a handicapped van space and sign would be appropriate.

2017 Update: No change. 2007 recommendations stand.

Pocasset Town Forest (Map 35, Lot 9)

Location: Valley Bars Road and County Road

Contains over 140 acres, this area features walking trails, watershed areas, and conservation area. The property is adjacent to the town water district.

2017 Update: There is an unofficial small parking lot for the walking trails. The trail surface is gravel and the width varies. The entrance to the trail is blocked by a gate. The following improvements are recommended. This site is owned by the Water District and as such, there are no recommendations at this time to improve access to the site. Access to this property can be through Four Ponds Conservation Area.

Post Office Playground (Washington Park) (Map 51.2, Lot 9.01)

Location: Post Office Square and Scraggy Neck Road, Cautaumet

Small park and playground.

2007 Update: An accessible route from the parking area to the playground equipment is needed.

2017 Update: There are handicapped parking spaces that are located next to the adjacent Post Office. The following improvements are recommended:

- Construct one handicapped space and appropriate signage next to the playground entrance.
- Improve access to the playground by paving a path from the access point to the playground and picnic area.
- Install a handicapped accessible picnic table and associated platform.

Queen Sewell Cove (Map 20.1, Lot 55)

Location: Cherry Street, Buzzards Bay

This area contains approximately 1.2 acres and a recreational, fishing, and picnicking.

2007 Update: No change.

2017 Update: The parking lot has designated accessible parking space with appropriated signage. The following improvements are recommended:

- Use an accessible beach mat to improve access to the water from the parking lot.

Robinson Conservation Area (Map 51.2, Lot 69)

Location: Accessible on Red Brook Harbor Road

29 acres (18 acres maintained by BCT) and part of Cataumet greenway. Parking available across the street at Dimmock Waterfront, dirt parking lot.

2017 Update: Parking off site and very steep terrain limit opportunities to improve accessibility. Any future improvements the Town will make to improve overall access to the site should include amenities for individuals with disabilities.

Sagamore Highlands (Map 2.1, Lot 1)

Location: Indian Trail and Hillside Road, Sagamore Beach

Located in North Sagamore adjacent to the “Strand.” These parcels are comprised of 5.64 acres, having upland and steep cliffs overlooking Cape Cod Bay. Trails, nature observation and parking is available.

2007 Update: There are no dedicated handicapped parking spaces or handicapped accessible trails. Adding a handicapped van space and sign would be appropriate, in addition to making a path accessible.

2017 Update: No changes have been made since the 2007 assessment. In order to make this area accessible, a lot of work needs to be done, including removing impediments to the trails, widening and paving accessible paths/trails, and resurfacing the end of Hillside Road. Due to these actions, no recommendations are made at this time.

Sand Spit Conservation Area (Map 47.1, Lot 19)

Location:

Located in Pocasset, contains 2.20 acres, consisting of a sandy beach, shellfish area, boat moorings, and fishing.

2007 Update: A handicapped van sign and space is needed.

2017 Update: No change. 2007 recommendations stand.

Shore Road Ballfields and Conservation Area (Map 34, Lot 31)

Location: Shore Road

Includes ball field, small tot lot/playground and concession stand. Ballfield and bleachers accessible by dirt path, playground elevated approximately 6", not accessible. The playground does not have an inclusive equipment. Concession stand was closed at site visit.

2017 Update: The following improvements are recommended:

- Construct one handicapped space next to the ballfield entrance and playground entrance.
- Improve access to the playground by paving a ramped path from the access point to the playground.
- Install a handicapped accessible picnic table and associated platform.

Squeteague Harbor Beach (Map 51.3, Lot 62)

Location: Squeteague Harbor Road, Cataumet

Contains approximately 2.5 acres with a recreational beach boat ramp, fishing, picnicking and shellfish area.

2007 Update: No change.

2017 Update: No change. There is no designated parking lot and no room to construct one; however, any future improvements the Town will make to improve overall access to the site should include amenities for individuals with disabilities.

Sagamore Beach "The Strand"

Location: Phillips Road, Sagamore Beach

Recreational beach on Cape Cod Bay with limited parking. Includes fishing, swimming, and picnicking.

2007 Update: Parking spaces and accessible trails need to be addressed. An accessible access ramp/boardwalk from the parking lot onto the beach area should be installed.

2017 Update: There are parking spaces designated as handicapped but the gravel parking lot does not have any space markings. An accessible ramp has been installed to access the beach. At the time of visit, the end of the ramp closest to the beach was buried under sand and therefore, not able to be assessed properly. The following improvements are recommended:

- Install appropriate handicapped railings on the access ramp.

Town Forest (Map 35, Lot 19)

Location: 559 County Road, Pocasset

Located in the villages of Pocasset and Monument Beach, this forest consists of upland and wildlife habitat with well field and natural trails.

2007 Update: Parking should be addressed by adding a handicapped van space and sign.

2017 Update: No changes have been made since 2007. The following improvements are recommended:

- Install a handicapped parking space with appropriate signage.

Veteran Memorial Park/Town Hall (Map 24.1, Lot 10)

Location: 24 Perry Avenue, Buzzards Bay

Town Hall is located adjacent to Bourne Pond with facilities consisting of a tennis court, picnic tables and benches.

2007 Update: Parking, the picnic area and accessible trails need to be addressed. A handicapped van space and sign is needed at the tennis area and a standard space is needed at the picnic area. An accessible route to the picnic area is needed as is a picnic table and appropriate surface.

2017 Update: No changes have been made since 2007. The following improvements are recommended:

- Install appropriate signage at the handicapped parking spaces behind the Town Hall. Install a sign at the front of the Town Hall that indicates handicapped parking is located behind the Town Hall.
- Improve access to the Veteran's Memorial by widening and repaving the sidewalks and pathways.
- Install a handicapped accessible picnic table and associated platform in the picnic area.
- Install a handicapped van space and associated sign.

Whitmore Playground (Map 43.2, Lot 7)

Location: 315 Barlows Landing Road, Pocasset

Including a baseball field, playground, tennis courts, basketball courts, spectator seating, food concession, and parking.

2007 Update: Parking spaces, play areas and ramps and trails all need attention. Signage is needed for a handicapped van as is one standard handicapped space and sign.

2017 Update: There are no handicapped spaces for this playground or ball fields. Access to the playground and fields is limited. The Town is currently renovating the playground and there are plans to provide inclusive equipment and designate accessible parking spaces. The following improvements are recommended

Willet Circle Conservation Area (Map 51.4, Lot 118)

Location: Accessible off Willet Circle.

Includes several parcels as part of a residential subdivision, nothing developed.

2017 Update: This area does not have amenities or a designated parking lot, which limits opportunities to improve accessibility. The Town has no future plans to improve the site; therefore, no recommendations are made at this time.

Wings Neck Conservation Area (Map 42.2, Lot 1)

Location: Accessible along Wing's Neck Road, at Pier Neck Road intersection (approximate).

Salt marsh, nothing developed.

2017 Update: This area does not have amenities or a designated parking lot, which limits opportunities to improve accessibility. The Town has no future plans to improve the site; therefore, no recommendations are made at this time.

Summary of Inventory Recommendations

A majority of the sites that are included in this inventory are unimproved hiking or nature areas. Recommendations are meant to identify areas of potential improvement that the Town will use to prioritize projects as it develops its Transition Plan (See Part IV).

Based on the self-evaluation results, there were two accessibility areas that were identified consistently at a majority of the locations: parking and site access. They are summarized below:

Parking Recommendations:

1. **Striping:** where necessary, provide the appropriate striping of accessible parking spaces, including hatching of access aisles.
2. **Accessible Parking Spaces:** where not already provided, designate accessible parking spaces to the closest entrance of the correct dimensions. In areas of high use such as parks, designate at least one accessible van space.
3. **Parking Signage:** where not already provided, install the appropriate accessible parking signage at the appropriate height. In some cases, the existing signage needs to be fixed.
4. **Parking surface:** where not already provided, ensure that the parking lot is even and provides an accessible path to the facility. Use compacted gravel or pave the parking lot.

Site Access Recommendations:

1. **Access Paths:** where not already provided, ensure that the path of travel from the accessible parking spaces in the parking lot to the facility is accessible and of even surface. This may require constructing the path of compacted gravel or pavement at an adequate width.
2. **Disembarking Area:** where not already provided and where there is adequate space, provide a disembarking area for vehicles at the closest entrance to the facility. Designate this area with appropriate signage.

Other Recommendations:

1. The Town may have beach mats already in use at town beaches. The Town may want to discuss usage policy to ensure coverage at all applicable sites.
2. Based on the success of the Bourne Inclusive Playground at Canal Crossings, the Town includes inclusive design elements in the improvements of its existing playgrounds. This should continue.

The Massachusetts Office on Disability (MOD) offers grants to remove barriers and create and improve accessible features and programmatic access for persons with disabilities. Towns and cities are eligible to apply. More information about the grant program is available on MOD's website:

www.mass.gov/mod/adagrant. In addition, MOD offers training for municipal officials and staff under Title I (Employment) and Title II (State and Local Government Services) of the ADA. The training can be geared towards specific municipal departments if needed.

A transition plan is required if structural changes are necessary. Several modifications to correct physical barriers were identified during the ADA Self-Evaluation. A Transition Plan is located in Section 4 of this report.

Part IV: Transition Plan

The purpose of the Transition Plan is to establish the steps necessary to complete any modifications identified through the ADA Self-Evaluation, schedule the necessary modifications, and identify the responsible individual or entity. At a minimum, the plan should address any physical barriers at the facilities evaluated during the ADA Self-Evaluation and describe the necessary modifications to make those facilities accessible.

Public Input

The development of the Transition Plan was done with input from individuals with disabilities and representatives from the disabled community. On December 12, 2017, the Town met with the Bourne Committee on Disability to discuss the preliminary results of the ADA Self-Evaluation and to request feedback on the draft transition plan matrix. The Committee reviewed the draft ADA Self-Evaluation Report, including the transition plan matrix, and was pleased with the thorough report. The Committee provided a few suggestions to change site priorities in the transition plan, based on their knowledge and use of the sites. In addition to this ADA Self-Evaluation, the Committee has a member inventorying the accessible parking situation at every Town recreation site, some of which may be beyond the scope of this report, which will help them decide future improvements. This ongoing work demonstrates their willingness to contribute their expertise to make the necessary accessibility improvements to Town areas. During the meeting, the Committee discussed how they could become more involved with the Town in ensuring new projects include accessibility and inclusive design, and updating current sites to be more accessible. The Committee will talk to the Town to see how they can take ownership over some of these projects or be included in the decision making for these future projects

Transition Plan

The recommended actions to remove accessibility barriers were prioritized based on frequency of use by individuals with disabilities, frequency of use by the general public, and additional factors such as safety, complaints from citizens, and aesthetics. Public input was key to understanding these issues. Sites that currently have amenities (e.g., parking lot) were ranked with a higher priority than sites that do not currently have amenities because accessibility improvements could be easily addressed. Additionally, sites that the Town currently has plans for future improvements were also ranked higher and will incorporate ADA accessibility standards.

The Town developed a ranking method to prioritize the inventoried sites for addressing accessibility recommendations. The Town established four categories for ranking:

- 1: The Town is currently working on or has plans to work on the site in the near future. These sites are popular and widely used with established amenities (e.g., parking lot, trail system, ball fields, play areas).
- 2: The Town recognizes that improvements are needed at the site and will develop plans to address the recommendations. These sites are also popular and widely used with established amenities (e.g., parking lot, trail system, ball fields, play areas).
- 3: The Town recognizes that improvements are needed at the site, but it does not have any plans to address recommendations at this time.
- 0: The site has no or extremely limited opportunities to develop amenities or improve accessibility. For example, parking is not available and no space to provide it; wetlands or steep topography limit trail or access development.

Sites that received a ranking score of 1 are reflected in the transition plan matrix. Sites in the matrix are ordered based on their ranking score. The rankings in the transition plan are meant to provide guidance to

the Town. At any point, the Town can decide to rearrange the priorities as this transition plan is a starting list of accessibility improvements.

BOURNE OPEN SPACE AND RECREATION PLAN – ADA Self Evaluation Transition Plan

Facility	Element	Issue/Physical Barrier	Location	Priority For Barrier Removal	Action(s) For Barrier Removal	Responsible Party Lead	Estimated Cost	Project Start Date	Project Complete Date
Bourne Public Library Recreational Fields	Parking	No designated accessible parking/surface	Parking	1	Improve the parking lot surface with compacted gravel or pavement. Designate accessible parking space with associated signage				
Bourne Public Library Recreational Fields	Access	No accessible path to fields or around field	Fields	1	Construct an accessible path leading to and around the fields				
Buzzards Bay Beach	Parking	Accessible parking spaces do not have signage	Accessible parking spaces	1	Install appropriate accessible parking signage				
Buzzards Bay Beach	Beach access	Access requires the use of stairs	Beach access	1	Replace stairs with an accessible ramp				
Buzzards Bay Park	-	-	-	1	2017 – undergoing improvements				
Canal Crossings Path - Bourne Inclusive Playground	Parking, van turnaround	No van turnaround		1	Work with neighboring property owner for temporary access				
Clark Field	Parking	Accessible parking spaces do not have signage	Accessible parking spaces	1	Install appropriate accessible parking signage				
Four Ponds Conservation Area	Parking	No designated accessible parking	Parking spaces	1	Designate one handicapped standard space and one handicapped van space with signage				


Facility	Element	Issue/Physical Barrier	Location	Priority For Barrier Removal	Action(s) For Barrier Removal	Responsible Party Lead	Estimated Cost	Project Start Date	Project Complete Date
Gray Gables Beach	Beach access	Access does not have a curb cut from the parking lot	Beach access	1	Install a curb cut to allow beach access				
Hen Cove Beach	Parking	No designated accessible parking for vans	Parking spaces	1	Designate one handicapped van space with signage				
Keith Field	Parking	No designated accessible parking	Parking spaces	1	Designate at least one accessible parking space with appropriate signage				
Monument Beach Marina	Parking	No designated accessible parking for vans	Parking	1	Designate one handicapped van space with signage				
Monument Beach Marina	Access	No accessible amenities	Picnic area	1	Install a handicapped accessible picnic table and associated platform near the other picnic tables				
Queen Sewell Park	Parking	No designated accessible parking	Parking spaces	1	Designate at least one accessible parking space with appropriate signage				
Shore Road Ballfields	Parking	No designated accessible parking	Parking spaces	1	Designate at least one accessible parking space with appropriate signage				
Veteran Memorial Park	Parking	Accessible parking spaces do not have signage	Accessible parking spaces behind Town Hall	1	Install appropriate accessible parking signage				

Facility	Element	Issue/Physical Barrier	Location	Priority For Barrier Removal	Action(s) For Barrier Removal	Responsible Party Lead	Estimated Cost	Project Start Date	Project Complete Date
Veteran Memorial Park	Memorial access	Path is too narrow and uneven	Memorial access sidewalk	1	Repave the sidewalk and increase the width				
Arthur Avenue Beach/Chester Park	Parking	No designated accessible parking	Parking spaces	2	Designate one handicapped standard space and one handicapped van space with signage				
Barlows Landing Beach/Conservation Area	Parking	Accessible parking is not clearly marked	Parking spaces	2	Stripe pavement adjacent to the handicapped space to indicate the access aisle.				
Barlows Landing Beach/Conservation Area	Parking	No designated accessible parking for vans	Parking spaces	2	Designate one handicapped van space with signage				
Barlows Landing Beach/Conservation Area	Access	Access to beach and picnic area		2	Construct an accessible path to the beach and picnic area of compacted gravel or pavement; Install a handicapped accessible picnic table and associated platform				
Bay Vista Conservation Area	Parking	No designated accessible parking	Parking	2	Install accessible parking spaces and associated signage on all three parking areas and improve parking surface for those spaces.				

Facility	Element	Issue/Physical Barrier	Location	Priority For Barrier Removal	Action(s) For Barrier Removal	Responsible Party Lead	Estimated Cost	Project Start Date	Project Complete Date
Carter Beal Conservation Area	Parking	No designated accessible parking	Parking	2	Install one handicapped parking space with appropriate signage.				
Eel Pond Beachway	Parking	No designated accessible parking, lot surface	Parking lot	2	Improve the parking surface of the parking lot and designate an accessible space with appropriate signage				
Leary Property	Parking	No designated accessible parking for vans	Parking spaces	2	Designate one handicapped van space with signage				
Monks Marine Park	Parking	No designated accessible parking for vans	Parking	2	Designate one handicapped van space with signage				
Sand Spit Conservation Area	Parking	No designated accessible parking for vans	Parking	2	Designate one handicapped van space with signage				
Town Forest	Parking	No designated accessible parking for vans	Parking	2	Designate one handicapped van space with signage				
Arthur Avenue Beach/Chester Park	Access	Access to the beach, play area, and basketball courts		3	Constructing route with compacted gravel or pavement/concrete				
Bay Vista Conservation Area	Beach access	Surface	Beach	3	Install a handicapped accessible beach mat on beach surface.				


Facility	Element	Issue/Physical Barrier	Location	Priority For Barrier Removal	Action(s) For Barrier Removal	Responsible Party Lead	Estimated Cost	Project Start Date	Project Complete Date
Butler Memorial Park	Parking	No designated parking lot	Parking	3	Determine potential area for designated parking, consider accessible parking spot along residential street				
Carter Beal Conservation Area	Path access	Access	Footbridge	3	Construct handicapped access trails to the footbridges				
Eel Pond Beachway	Access	Path is loose sand and silt	Pond	3	Improve site access to the pond by using compacted gravel or pavement for the path				
Eldridge Memorial Park/Queen Sewell Park	Access	Pathways	Playground, ball field	3	Remove interior fence at the entrance, remove, nearby boulders, and construct a more level or paved path. Construct level or paved path to the spectator seating and ball field.				
Leary Property	Access	Pathway surface	Path	3	Improve pathway to bench trails				
Picture Lake Access	Access	Curbing and path surface	Beach	3	Create curb cuts in the side of the road and installing an accessible beach mat				
Sagamore Beach "The Strand"	Access	No railings	Ramp	3	Install appropriate handicapped railings on the access ramp				

APPENDIX A



TOWN OF BOURNE
Town Administrator

24 Perry Avenue
Buzzards Bay, MA 02532
Phone 508-759-0600 x1503 – Fax 508-759-0620

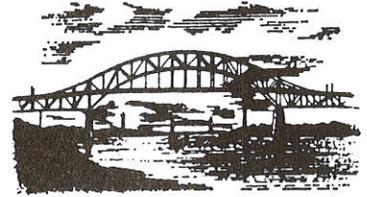

THOMAS M. GUERINO
email: tguerino@townofbourne.com

November 1, 2017

ATTN: Barry Johnson, Open Space Committee Chair

Dear Barry,

This letter is to attest that the Town of Bourne designated myself, Thomas Guerino, Town Administrator, as the Americans with Disabilities Act (ADA) Coordinator.

The Town of Bourne's employment practices, including recruitment, personnel actions, leave administration, training, tests, medical exams/questionnaires, social and recreational programs, fringe benefits, collective bargaining agreements, and wage and salary administration are in compliance with the ADA.

Please contact me if you are in need of additional information.

Sincerely,



Thomas M. Guerino
Town Administrator

ATTACHMENT: Citizen Complaint form



TOWN OF BOURNE

Board of Selectmen

24 Perry Avenue – Room 101
Buzzards Bay, MA 02532-3496
www.townofbourne.com



Phone: 508-759-0600 x1503
Fax: 508-759-8026

Complaint and Work Request Form

Name:

Phone:

Address:

Date:

Time:

Received By:

Type of complaint or request: (check one)

Cable

DPW/ISWM:

Marina

Police

Location:

Selectmen's Office Use Only

Recommendation or Action Taken:

APPENDIX B



Town of Bourne ~ Employment Application

24 Perry Avenue, Buzzards Bay, MA 02532-3441

Telephone (508) 759-0600 Fax (508) 759-0620

www.townofbourne.com

An Equal Opportunity/Affirmative Action Employer

PLEASE READ BEFORE FILLING OUT THIS APPLICATION

It is the policy of the Town of Bourne to afford equal employment opportunity to all qualified persons regardless of race, color, religion, national origin, age, military status, sexual orientation, disability, or gender, except where age or sex is a bonafide occupational qualification, as allowed by the Civil Rights Act of 1964. To be sure that your application is properly evaluated, all questions should be answered clearly, completely and accurately. If you need more space, please attach a separate sheet.

Please print clearly in black or blue ink. Also, "See Resume" is not acceptable in any field.

I. CONTACT INFORMATION

DATE

Name _____
Last First Middle

Address _____
Number Street Town State Zip Code

Mailing Address _____
Number Street Town State Zip Code

Telephone _____ Cell Phone _____ Email Address _____

National ID (SS#) (optional) _____ Are you over age 18? YES _____ NO _____

II. POSITION APPLYING FOR (Please specify position title) _____

How did you learn about the position? [newspaper, posting, web, DES] _____

Have you ever been employed by the Town of Bourne? When? What department? _____

III. LICENSES (Please list all licenses you possess that are relative to the position you seek). A valid license is a condition a/employment, where required.

Do you have a valid driver's license (Class D Auto)? Yes _____ No _____ If yes, enter expiration date

Do you have a valid CDL License (Class A or B)? Yes _____ No _____ If yes, enter expiration date

Do you have a valid Hydraulic license? Yes _____ No _____ If yes, enter expiration date

What other valid licenses or certifications do you possess (job related)? _____

IV. OFFICE SKILLS (if applicable) Check the column that you feel best describes your knowledge:

	Beginner	Intermediate	Advanced Level
Knowledge of Word Processing			
Knowledge of Spreadsheets			
Knowledge of Databases			
Accounting System Knowledge			
Bookkeeping Knowledge			
Transcription Ability			
Shorthand/Speedwriting Ability			

V. EDUCATION

School	Name, Address, City, State	Years Attended	Degree
High School			
College			
Graduate			
Trade Business, Night Courses			
Military Service, Other Training			

VI. SPECIAL SKILLS. Please list any other or abilities you feel are relevant:

VII. PRE-EMPLOYMENT DRUG TESTING. All offers of employment are conditional upon the satisfactory completion of a pre-employment drug test, where required.

VII. EMPLOYMENT OF MINORS.

The Town of Bourne is subject to certain child labor provisions regarding the employment of persons under the age of 18. Further, an Employment Permit or Education Certificate may be required, depending on you age.

Are you under age 18? If yes, please indicate your age: _____

IX. IMMIGRATION STATUS. Are you prevented from lawfully becoming employed in this country because of Visa or Immigration Status? _____ YES _____ NO

X. IMMEDIATE FAMILY

IMMEDIATE FAMILY WORKING FOR THE TOWN OF BOURNE

Please disclose any immediate family members, including those related to your immediate family by marriage, who are employed by the Town of Bourne. You are required to complete the information below. "Immediate family" is defined as a spouse, child, parent and sibling; and the spouse's child, parent and sibling. Include those employed in all branches of Town government; and those employed as regular or contract employees, or elected officials. This "sunshine disclosure" is intended to ensure that the citizens of our town have full confidence in their government and its hiring process. The disclosure will not be used to exclude any qualified applicant seeking a position from receiving full consideration based on the merits of his/her credentials and the requirements of the job. Attach additional pages if needed.

Name of Relative	Relationship	Title of Relative's Job	State Agency

XI. EMPLOYMENT HISTORY. (Please do not write, "See Resume". A resume may not be substituted but may be included as a supplement.) Please account for the last 4 positions you have held. Start with your present or last employer. You may include military service and any verifiable work performed as in intern or volunteer.

You (___) may (___) may not contact my present employer.

Employer	Address
Telephone	Title
Supervisor	Dates Worked
Salary Received	Reason for Leaving

Description of Primary Duties: _____

Employer	Address
Telephone	Title
Supervisor	Dates Worked
Salary Received	Reason for Leaving

Description of Primary Duties: _____

Employer	Address
Telephone	Title
Supervisor	Dates Worked
Salary Received	Reason for Leaving

Description of Primary Duties: _____

Employer	Address
Telephone	Title
Supervisor	Dates Worked
Salary Received	Reason for Leaving

Description of Primary Duties: _____

PROFESSIONAL REFERENCES (Not Personal): List 3 people not related to you who can comment on your work performance and/or experience.				
NAME	ADDRESS	PHONE	OCCUPATION	YEARS ACQUAINTED

**RELEASE AND CERTIFICATION
PLEASE READ BEFORE SIGNING**

I understand that acceptance of this application by the Town of Bourne does not imply that I will be employed.

The information that I have provided is true and complete. I understand that misrepresentation or omission of any fact in my application, resume, or in any other materials or as provided during interviews, can be justification for refusal of employment or can be justification for termination from employment, if employed.

I understand that any offer of employment that I receive from the Town of Bourne is contingent upon my successful completion of the pre-employment screening process including but not limited to the Town of Bourne receiving satisfactory references, a satisfactory criminal history and Criminal Offense Record Inquiry, if required, satisfactory verification of driver's license or certifications, where required, and satisfactory completion of any required post-offer pre-employment drug test or physical examination.

In processing my application for employment, the Town of Bourne may verify all of the information provided by me concerning, among other things, my prior employment or military record, education, character, general reputation and personal characteristics. I authorize the Town to take whatever steps deemed necessary to obtain information regarding my qualifications for employment including contacting my present and former employers, by contacting individuals listed as business, educational or personal references, and by contacting other individuals to provide or further clarify information about me.

I hereby release my present and former employers and all individuals contacted for factual information about me from any and all liability for damages arising from furnishing the requested information.

If employed by the Town of Bourne, I understand that as a condition of employment, I may be required to furnish additional or updated medical information, that I may be required to undergo a physical examination, that I may be subject to drug and/or alcohol testing, that the Town may require a Criminal Offense Record Inquiry (CORI) check on me, investigate my driving record or verify my license(s) or certifications(s), as required for employment at any time during my employment. As a condition of employment an employee may be required to provide additional or updated information, especially if this employee has been on workers' compensation, and may require both drug testing and an employment physical in order to allow us to have the necessary information for making a proper decision or reasonable accommodations, if necessary.

I understand that the Town of Bourne is an at-will employer. If employed, I understand that my employment may be terminated with or without cause at any time, unless there is an applicable bargaining unit contract provision.

***My signature certifies that I have read and agree with the above statement
and all statements contained in this application for employment***

Applicant Name (Please Print)

Applicant Signature

Date

"It is unlawful in Massachusetts to require or administer a lie detector test as a condition of employment or continued employment. An employer who violates this law shall be subject to criminal penalties and civil liability." MGL Ch. 149, Section 19B

APPENDIX C

(Arthur Avenue Beach)

Chester Park

~~Arthur Avenue Beach~~

Facility Inventory

Location:

ACTIVITY	EQUIPMENT	NOTES
Picnic Facilities	Tables & Benches	Located adjacent to accessible paths No
		Access to Open Spaces Yes
		Back and Arm Rests Back-yes
		Adequate number NO
	Grills NIA	Height of Cooking Surface
	Trash Cans NIA	Located adjacent to accessible paths
	Picnic Shelters NIA	Located adjacent to accessible paths
Trails NIA		Located near accessible water fountains, trash can, restroom, parking, etc.
		Surface material
		Dimensions
		Rails
Swimming Facilities	Pools NIA	Signage (for visually impaired)
		Entrance
		Location from accessible parking
	Beaches	Safety features i.e. warning for visually impaired
		Location from accessible path into water NO
		Handrails NO
		Location from accessible parking NO
Play Areas (tot lots)	All Play Equipment i.e. swings, slides	Shade provided NO
		Same experience provided to all NO
		Access Routes
Game Areas: *ballfield *basketball *tennis	Access Routes	Located adjacent to accessible paths NO
		Enough space between equipment for wheelchair yes
	Equipment	Located adjacent to accessible paths needs improvement - pave
		Berm cuts onto courts yes
Boat Docks NIA	Access Routes	Height
		Dimensions
Fishing Facilities NIA	Access Routes	Spectator Seating NO
		Located adjacent to accessible paths
	Equipment	Handrails
		Arm Rests
		Bait Shelves
Programming NIA	Are special programs at your facilities accessible?	Handrails
		Fish Cleaning Tables
		Learn-to-Swim
Services and Technical Assistance NIA		Guided Hikes
		Interpretive Programs
Services and Technical Assistance NIA		Information available in alternative formats i.e. for visually impaired
		Process to request interpretive services (i.e. sign language interpreter) for meetings

Chester Park and Arthur Avenue Beach are next to each other. There appears to be no dedicated parking lot for either - cars park alongside the road.

Recommend putting in at least one handicap space and paving access to beach and play area.

Location:

PARKING <i>No designated parking lot</i>			
<i>Total Spaces</i>		<i>Required Accessible Spaces</i> <i>None</i>	
Up to 25		1 space	
26-50		2 spaces	
51-75		3 spaces	
76-100		4 spaces	
101-150		5 spaces	
151-200		6 spaces	
201-300		7 spaces	
301-400		8 spaces	
401-500		9 spaces	
<i>Specification for Accessible Spaces</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Accessible space located closest to accessible entrance		✓	
Where spaces cannot be located within 200 ft of accessible entrance, drop-off area is provided within 100 ft.		✓	
Minimum width of 13 ft includes 8 ft space plus 5 ft access aisle		✓	
Van space – minimum of 1 van space for every accessible space, 8 ft wide plus 8 ft aisle. Alternative is to make all accessible spaces 11 ft wide with 5 ft aisle.		✓	
Sign with international symbol of accessibility at each space or pair of spaces		✓	
Sign minimum 5 ft, maximum 8 ft to top of sign		✓	
Surface evenly paved or hard-packed (no cracks)		✓	
Surface slope less than 1:20, 5%		✓	
Curbcut to pathway from parking lot at each space or pair of spaces, if sidewalk (curb) is present			
Curbcut is a minimum width of 3 ft, excluding sloped sides, has sloped sides, all slopes not to exceed 1:12, and textured or painted yellow			
RAMPS <i>N/A</i>			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Slope Maximum 1:12			
Minimum width 4 ft between handrails			
Handrails on both sides if ramp is longer than 6 ft			
Handrails at 34" and 19" from ramp surface			
Handrails extend 12" beyond top and bottom			
Handgrip oval or round			
Handgrip smooth surface			
Handgrip diameter between 1 1/4" and 2"			
Clearance of 1 1/2" between wall and wall rail			
Non-slip surface			
Level platforms (4ft x 4 ft) at every 30 ft, at top, at bottom, at change of direction			

Notes

Location

SITE ACCESS, PATH OF TRAVEL, ENTRANCES			
<i>Specification</i>	Yes	No	<i>Comments/Transition Notes</i>
Site Access			
Accessible path of travel from passenger disembarking area and parking area to accessible entrance		✓	needs to be paved
Disembarking area at accessible entrance		✓	if cars are not parked alongside road
Surface evenly paved or hard-packed	✓	no	
No ponding of water	✓		
Path of Travel			
Path does not require the use of stairs	✓	no	
Path is stable, firm and slip resistant		✓	Sandy
3 ft wide minimum	✓		
Slope maximum 1:20 (5%) and maximum cross pitch is 2% (1:50).	✓		
Continuous common surface, no changes in level greater than 1/2 inch		✓	
Any objects protruding onto the pathway must be detected by a person with a visual disability using a cane		✓	
Objects protruding more than 4" from the wall must be within 27" of the ground, or higher than 80"			N/A
Curb on the pathway must have curb cuts at drives, parking and drop-offs			
Entrances N/A			
Primary public entrances accessible to person using wheelchair, must be signed, gotten to independently, and <i>not</i> be the service entrance			
Level space extending 5 ft. from the door, interior and exterior of entrance doors			
Minimum 32" clear width opening (i.e. 36" door with standard hinge)			
At least 18" clear floor area on latch, pull side of door			
Door handle no higher than 48" and operable with a closed fist			
Vestibule is 4 ft plus the width of the door swinging into the space			
Entrance(s) on a level that makes elevators accessible			
Door mats less than 1/2" thick are securely fastened			
Door mats more than 1/2" thick are recessed			
Grates in path of travel have openings of 1/2" maximum			
Signs at non-accessible entrance(s) indicate direction to accessible entrance			
Emergency egress – alarms with flashing lights and audible signals, sufficiently lighted			

Notes

Location

STAIRS and DOORS N/A			
Specification	Yes	No	Comments/Transition Notes
Stairs			
No open risers			
Nosings not projecting			
Treads no less than 11" wide			
Handrails on both sides			
Handrails 34"-38" above tread			
Handrail extends a minimum of 1 ft beyond top and bottom riser (if no safety hazard and space permits)			
Handgrip oval or round			
Handgrip has a smooth surface			
Handgrip diameter between 1¼" and 1½"			
1½" clearance between wall and handrail			
Doors			
Minimum 32" clear opening			
At least 18" clear floor space on pull side of door			
Closing speed minimum 3 seconds to within 3" of the latch			
Maximum pressure 5 pounds interior doors			
Threshold maximum ½" high, beveled on both sides			
Hardware operable with a closed fist (no conventional door knobs or thumb latch devices)			
Hardware minimum 36", maximum 48" above the floor			
Clear, level floor space extends out 5 ft from both sides of the door			
Door adjacent to revolving door is accessible and unlocked			
Doors opening into hazardous area have hardware that is knurled or roughened			

Notes

Location

RESTROOMS – also see Doors and Vestibules N/A			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
5 ft turning space measured 12" from the floor			
At least one Sink:			
Clear floor space of 30" by 48" to allow a forward approach			
Mounted without pedestal or legs, height 34" to top of rim			
Extends at least 22" from the wall			
Open knee space a minimum 19" deep, 30" width, and 27" high			
Cover exposed pipes with insulation			
Faucets operable with closed fist (lever or spring activated handle)			
At least one Stall:			
Accessible to person using wheelchair at 60" wide by 72" deep			
Stall door is 36" wide			
Stall door swings out			
Stall door is self closing			
Stall door has a pull latch			
Lock on stall door is operable with a closed fist, and 32" above the floor			
Coat hook is 54" high			
Toilet			
18" from center to nearest side wall			
42" minimum clear space from center to farthest wall or fixture			
Top of seat 17"-19" above the floor			
Grab Bars			
On back and side wall closest to toilet			
1½" diameter			
1½" clearance to wall			
Located 30" above and parallel to the floor			
Acid-etched or roughened surface			
42" long			
Fixtures			
Toilet paper dispenser is 24" above floor			
One mirror set a maximum 38" to bottom (if tilted, 42")			
Dispensers (towel, soap, etc) at least one of each a maximum 42" above the floor			

Notes

Location

FLOORS, DRINKING FOUNTAINS, TELEPHONES N/A			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Floors			
Non-slip surface			
Carpeting is high-density, low pile, non-absorbent, stretched taut, securely anchored			
Corridor width minimum is 3 ft			
Objects (signs, ceiling lights, fixtures) can only protrude 4" into the path of travel from a height of 27" to 80" above the floor			
Drinking Fountains			
Spouts no higher than 36" from floor to outlet			
Hand operated push button or level controls			
Spouts located near front with stream of water as parallel to front as possible			
If recessed, recess a minimum 30" width, and no deeper than depth of fountain			
If no clear knee space underneath, clear floor space 30" x 48" to allow parallel approach			
Telephones			
Highest operating part a maximum 54" above the floor			
Access within 12" of phone, 30" high by 30" wide			
Adjustable volume control on headset so identified			
SIGNS, SIGNALS, AND SWITCHES			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Switches, Controls and Signs			
Switches and controls for light, heat, ventilation, windows, fire alarms, thermostats, etc, must be a minimum of 36" and a maximum of 48" above the floor for a forward reach, a maximum of 54" for a side reach			
Electrical outlets centered no lower than 18" above the floor			
Warning signals must be visual as well as audible			
Signs			
Mounting height must be 60" to centerline of the sign			
Within 18" of door jamb or recessed			
Letters and numbers at least 1/4" high			
Letters and numbers raised .03"			
Letters and numbers contrast with the background color			

Notes

Location

SWIMMING POOLS – accessibility can be via ramp, lifting device, or transfer area N/A			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Ramp at least 34" wide with a non-slip surface extending into the shallow end, slope not exceeding 1:6 with handrails on both sides			
Lifting device			
Transfer area 18" above the path of travel and a minimum of 18" wide			
Unobstructed path of travel not less than 48" wide around pool			
Non-slip surface			

Location

SHOWER ROOMS - Showers must accommodate both wheel-in and transfer use N/A			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Stalls 36" by 60" minimum, with a 36" door opening			
Floors are pitched to drain the stall at the corner farthest from entrance			
Floors are non-slip surface			
Controls operate by a single lever with a pressure balance mixing valve			
Controls are located on the center wall adjacent to the hinged seat			
Shower heads attached to a flexible metal hose			
Shower heads attached to wall mounting adjustable from 42" to 72" above the floor			
Seat is hinged and padded and at least 16" deep, folds upward, securely attached to side wall, height is 18" to the top of the seat, and at least 24" long			
Soap trays without handhold features unless they can support 250 pounds			
2 grab bars are provided, one 30" and one 48" long, or one continuous L shaped bar			
Grab bars are placed horizontally at 36" above the floor line			

Location

PICNICKING			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
A minimum of 5% of the total tables must be accessible with clear space under the table top not less than 30" wide and 19" deep per seating space and not less than 27" clear from the ground to the underside of the table. An additional 29" clear space (totaling 48") must extend beyond the 19" clear space under the table to provide access	✓		
For tables without toe clearance, the knee space under the table must be at least 28" high, 30" wide and 24" deep.	✓		
Top of table no higher than 32" above ground	✓		
Surface of the clear ground space under and around the table must be stable, firm and slip-resistant, and evenly graded with a maximum slope of 2% in all directions	✓		
Accessible tables, grills and fire rings must have clear ground space of at least 36" around the perimeter N/A			

Facility Inventory

Location: Buzzards Bay Park

ACTIVITY	EQUIPMENT	NOTES
Picnic Facilities	Tables & Benches	Located adjacent to accessible paths <i>Yes but not for picnic tables</i>
		Access to Open Spaces <i>Yes</i>
		Back and Arm Rests <i>back rest but no arm rest</i>
		Adequate number <i>Yes</i>
	Grills <i>N/A</i>	Height of Cooking Surface
	Trash Cans	Located adjacent to accessible paths <i>Yes</i>
	Picnic Shelters ###	Located adjacent to accessible paths <i>NO</i>
		Located near accessible water fountains, trash can, restroom, parking, etc. <i>Yes</i>
Trails <i>N/A</i>		Surface material
		Dimensions
		Rails
		Signage (for visually impaired)
Swimming Facilities <i>N/A</i>	Pools	Entrance
		Location from accessible parking
		Safety features i.e. warning for visually impaired
	Beaches	Location from accessible path into water
		Handrails
		Location from accessible parking
		Shade provided
Play Areas (tot lots) <i>N/A</i>	All Play Equipment i.e. swings, slides	Same experience provided to all
	Access Routes	Located adjacent to accessible paths Enough space between equipment for wheelchair
Game Areas: *ballfield *basketball *tennis <i>N/A</i>	Access Routes	Located adjacent to accessible paths
		Berm cuts onto courts
	Equipment	Height
		Dimensions Spectator Seating
Boat Docks <i>N/A</i>	Access Routes	Located adjacent to accessible paths Handrails
Fishing Facilities <i>N/A</i>	Access Routes	Located adjacent to accessible paths
		Handrails
	Equipment	Arm Rests
		Bait Shelves
		Handrails Fish Cleaning Tables
Programming <i>N/A</i>	Are special programs at your facilities accessible?	Learn-to-Swim
		Guided Hikes
		Interpretive Programs
Services and Technical Assistance <i>N/A</i>	Information available in alternative formats i.e. for visually impaired	
	Process to request interpretive services (i.e. sign language interpreter) for meetings	

At time of visit, the park with gazebo were under construction. This part of the park was unable to be assessed.

Location:

PARKING			
<i>Total Spaces</i>	<i>Required Accessible Spaces</i>		
Up to 25	1 space		
26-50	2 spaces		
51-75	3 spaces		
76-100	4 spaces		
101-150	5 spaces		
151-200	6 spaces		
201-300	7 spaces		
301-400	8 spaces		
401-500	9 spaces		
<i>Specification for Accessible Spaces</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Accessible space located closest to accessible entrance	✓		
Where spaces cannot be located within 200 ft of accessible entrance, drop-off area is provided within 100 ft.		✓	
Minimum width of 13 ft includes 8 ft space plus 5 ft access aisle	✓		
Van space – minimum of 1 van space for every accessible space, 8 ft wide plus 8 ft aisle. Alternative is to make all accessible spaces 11 ft wide with 5 ft aisle.		✓	
Sign with international symbol of accessibility at each space or pair of spaces	✓		
Sign minimum 5 ft, maximum 8 ft to top of sign	✓		
Surface evenly paved or hard-packed (no cracks)	✓		
Surface slope less than 1:20, 5%	✓		
Curbscut to pathway from parking lot at each space or pair of spaces, if sidewalk (curb) is present	✓		
Curbscut is a minimum width of 3 ft, excluding sloped sides, has sloped sides, all slopes not to exceed 1:12, and textured or painted yellow	✓		
RAMPS NIA			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Slope Maximum 1:12			
Minimum width 4 ft between handrails			
Handrails on both sides if ramp is longer than 6 ft			
Handrails at 34" and 19" from ramp surface			
Handrails extend 12" beyond top and bottom			
Handgrip oval or round			
Handgrip smooth surface			
Handgrip diameter between 1¼" and 2"			
Clearance of 1½" between wall and wall rail			
Non-slip surface			
Level platforms (4ft x 4 ft) at every 30 ft, at top, at bottom, at change of direction			

Notes

Close to the park, there are 6 handicap spaces, two of which are van accessible

Location

SITE ACCESS, PATH OF TRAVEL, ENTRANCES			
Specification	Yes	No	Comments/Transition Notes
Site Access			
Accessible path of travel from passenger disembarking area and parking area to accessible entrance	✓		
Disembarking area at accessible entrance	✓	✓	
Surface evenly paved or hard-packed	✓		
No ponding of water	✓		
Path of Travel			
Path does not require the use of stairs	✓		
Path is stable, firm and slip resistant	✓		
3 ft wide minimum	✓		
Slope maximum 1:20 (5%) and maximum cross pitch is 2% (1:50).	✓		
Continuous common surface, no changes in level greater than ½ inch	✓		
Any objects protruding onto the pathway must be detected by a person with a visual disability using a cane	✓		
Objects protruding more than 4" from the wall must be within 27" of the ground, or higher than 80"	N/A		
Curb on the pathway must have curb cuts at drives, parking and drop-offs	✓		
Entrances N/A			
Primary public entrances accessible to person using wheelchair, must be signed, gotten to independently, and <i>not</i> be the service entrance			
Level space extending 5 ft. from the door, interior and exterior of entrance doors			
Minimum 32" clear width opening (i.e. 36" door with standard hinge)			
At least 18" clear floor area on latch, pull side of door			
Door handle no higher than 48" and operable with a closed fist			
Vestibule is 4 ft plus the width of the door swinging into the space			
Entrance(s) on a level that makes elevators accessible			
Door mats less than ½" thick are securely fastened			
Door mats more than ½" thick are recessed			
Grates in path of travel have openings of ½" maximum			
Signs at non-accessible entrance(s) indicate direction to accessible entrance			
Emergency egress – alarms with flashing lights and audible signals, sufficiently lighted			

Notes

Location

STAIRS and DOORS N/A			
Specification	Yes	No	Comments/Transition Notes
Stairs			
No open risers			
Nosings not projecting			
Treads no less than 11" wide			
Handrails on both sides			
Handrails 34"-38" above tread			
Handrail extends a minimum of 1 ft beyond top and bottom riser (if no safety hazard and space permits)			
Handgrip oval or round			
Handgrip has a smooth surface			
Handgrip diameter between 1¼" and 1½"			
1½" clearance between wall and handrail			
Doors			
Minimum 32" clear opening			
At least 18" clear floor space on pull side of door			
Closing speed minimum 3 seconds to within 3" of the latch			
Maximum pressure 5 pounds interior doors			
Threshold maximum ½" high, beveled on both sides			
Hardware operable with a closed fist (no conventional door knobs or thumb latch devices)			
Hardware minimum 36", maximum 48" above the floor			
Clear, level floor space extends out 5 ft from both sides of the door			
Door adjacent to revolving door is accessible and unlocked			
Doors opening into hazardous area have hardware that is knurled or roughened			

Notes

Location

RESTROOMS – also see Doors and Vestibules N/A			
Specification	Yes	No	Comments/Transition Notes
5 ft turning space measured 12" from the floor			
At least one Sink:			
Clear floor space of 30" by 48" to allow a forward approach			
Mounted without pedestal or legs, height 34" to top of rim			
Extends at least 22" from the wall			
Open knee space a minimum 19" deep, 30" width, and 27" high			
Cover exposed pipes with insulation			
Faucets operable with closed fist (lever or spring activated handle)			
At least one Stall:			
Accessible to person using wheelchair at 60" wide by 72" deep			
Stall door is 36" wide			
Stall door swings out			
Stall door is self closing			
Stall door has a pull latch			
Lock on stall door is operable with a closed fist, and 32" above the floor			
Coat hook is 54" high			
Toilet			
18" from center to nearest side wall			
42" minimum clear space from center to farthest wall or fixture			
Top of seat 17"-19" above the floor			
Grab Bars			
On back and side wall closest to toilet			
1¼" diameter			
1½" clearance to wall			
Located 30" above and parallel to the floor			
Acid-etched or roughened surface			
42" long			
Fixtures			
Toilet paper dispenser is 24" above floor			
One mirror set a maximum 38" to bottom (if tilted, 42")			
Dispensers (towel, soap, etc) at least one of each a maximum 42" above the floor			

Notes

Restrooms were closed at time of visit

Location

FLOORS, DRINKING FOUNTAINS, TELEPHONES N/A			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Floors			
Non-slip surface			
Carpeting is high-density, low pile, non-absorbent, stretched taut, securely anchored			
Corridor width minimum is 3 ft			
Objects (signs, ceiling lights, fixtures) can only protrude 4" into the path of travel from a height of 27" to 80" above the floor			
Drinking Fountains			
Spouts no higher than 36" from floor to outlet			
Hand operated push button or level controls			
Spouts located near front with stream of water as parallel to front as possible			
If recessed, recess a minimum 30" width, and no deeper than depth of fountain			
If no clear knee space underneath, clear floor space 30" x 48" to allow parallel approach			
Telephones			
Highest operating part a maximum 54" above the floor			
Access within 12" of phone, 30" high by 30" wide			
Adjustable volume control on headset so identified			
SIGNS, SIGNALS, AND SWITCHES			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Switches, Controls and Signs			
Switches and controls for light, heat, ventilation, windows, fire alarms, thermostats, etc, must be a minimum of 36" and a maximum of 48" above the floor for a forward reach, a maximum of 54" for a side reach			
Electrical outlets centered no lower than 18" above the floor			
Warning signals must be visual as well as audible			
Signs			
Mounting height must be 60" to centerline of the sign			
Within 18" of door jamb or recessed			
Letters and numbers at least 1/4" high			
Letters and numbers raised .03"			
Letters and numbers contrast with the background color			

Notes

Location

SWIMMING POOLS – accessibility can be via ramp, lifting device, or transfer area NIA			
Specification	Yes	No	Comments/Transition Notes
Ramp at least 34" wide with a non-slip surface extending into the shallow end, slope not exceeding 1:6 with handrails on both sides			
Lifting device			
Transfer area 18" above the path of travel and a minimum of 18" wide			
Unobstructed path of travel not less than 48" wide around pool			
Non-slip surface			

Location

SHOWER ROOMS - Showers must accommodate both wheel-in and transfer use NIA			
Specification	Yes	No	Comments/Transition Notes
Stalls 36" by 60" minimum, with a 36" door opening			
Floors are pitched to drain the stall at the corner farthest from entrance			
Floors are non-slip surface			
Controls operate by a single lever with a pressure balance mixing valve			
Controls are located on the center wall adjacent to the hinged seat			
Shower heads attached to a flexible metal hose			
Shower heads attached to wall mounting adjustable from 42" to 72" above the floor			
Seat is hinged and padded and at least 16" deep, folds upward, securely attached to side wall, height is 18" to the top of the seat, and at least 24" long			
Soap trays without handhold features unless they can support 250 pounds			
2 grab bars are provided, one 30" and one 48" long, or one continuous L shaped bar			
Grab bars are placed horizontally at 36" above the floor line			

Location

PICNICKING			
Specification	Yes	No	Comments/Transition Notes
A minimum of 5% of the total tables must be accessible with clear space under the table top not less than 30" wide and 19" deep per seating space and not less than 27" clear from the ground to the underside of the table. An additional 29" clear space (totaling 48") must extend beyond the 19" clear space under the table to provide access		✓	
For tables without toe clearance, the knee space under the table must be at least 28" high, 30" wide and 24" deep.		✓	
Top of table no higher than 32" above ground	✓		
Surface of the clear ground space under and around the table must be stable, firm and slip-resistant, and evenly graded with a maximum slope of 2% in all directions	✓		
Accessible tables, grills and fire rings must have clear ground space of at least 36" around the perimeter	✓		

Picnic tables are not accessible. Recommend paving path to tables

Facility Inventory

Location: *Carter Beal Property*

ACTIVITY	EQUIPMENT	NOTES
Picnic Facilities <i>NIA</i>	Tables & Benches	Located adjacent to accessible paths
		Access to Open Spaces
		Back and Arm Rests
		Adequate number
	Grills	Height of Cooking Surface
Trash Cans	Picnic Shelters	Located adjacent to accessible paths
		Located adjacent to accessible paths
		Located near accessible water fountains, trash can, restroom, parking, etc.
Trails	Surface material	<i>dirt</i>
	Dimensions	<i>1.5' wide</i>
	Rails	<i>no</i>
	Signage (for visually impaired)	<i>no</i>
Swimming Facilities <i>NIA</i>	Pools	Entrance
		Location from accessible parking
		Safety features i.e. warning for visually impaired
	Beaches	Location from accessible path into water
		Handrails
		Shade provided
Play Areas (tot lots) <i>NIA</i>	All Play Equipment i.e. swings, slides	Same experience provided to all
	Access Routes	Located adjacent to accessible paths Enough space between equipment for wheelchair
Game Areas: *ballfield *basketball *tennis <i>NIA</i>	Access Routes	Located adjacent to accessible paths
		Berm cuts onto courts
	Equipment	Height
		Dimensions Spectator Seating
Boat Docks <i>NIA</i>	Access Routes	Located adjacent to accessible paths
		Handrails
Fishing Facilities <i>NIA</i>	Access Routes	Located adjacent to accessible paths
		Handrails
	Equipment	Arm Rests
		Bait Shelves
		Handrails Fish Cleaning Tables
Programming <i>NIA</i>	Are special programs at your facilities accessible?	Learn-to-Swim
		Guided Hikes
		Interpretive Programs
Services and Technical Assistance <i>NIA</i>		Information available in alternative formats i.e. for visually impaired
		Process to request interpretive services (i.e. sign language interpreter) for meetings

Trails are not accessible

Location:

PARKING			
<i>Total Spaces</i>	<i>Required Accessible Spaces</i> None		
Up to 25 approx. 4 spaces	1 space		
26-50	2 spaces		
51-75	3 spaces		
76-100	4 spaces		
101-150	5 spaces		
151-200	6 spaces		
201-300	7 spaces		
301-400	8 spaces		
401-500	9 spaces		
<i>Specification for Accessible Spaces</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Accessible space located closest to accessible entrance		✓	
Where spaces cannot be located within 200 ft of accessible entrance, drop-off area is provided within 100 ft.		✓	
Minimum width of 13 ft includes 8 ft space plus 5 ft access aisle		✓	
Van space – minimum of 1 van space for every accessible space, 8 ft wide plus 8 ft aisle. Alternative is to make all accessible spaces 11 ft wide with 5 ft aisle.		✓	
Sign with international symbol of accessibility at each space or pair of spaces		✓	
Sign minimum 5 ft, maximum 8 ft to top of sign		✓	
Surface evenly paved or hard-packed (no cracks)		✓	
Surface slope less than 1:20, 5%			
Curbscut to pathway from parking lot at each space or pair of spaces, if sidewalk (curb) is present			N/A no w/d
Curbscut is a minimum width of 3 ft, excluding sloped sides, has sloped sides, all slopes not to exceed 1:12, and textured or painted yellow			
RAMPS N/A			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Slope Maximum 1:12			
Minimum width 4 ft between handrails			
Handrails on both sides if ramp is longer than 6 ft			
Handrails at 34" and 19" from ramp surface			
Handrails extend 12" beyond top and bottom			
Handgrip oval or round			
Handgrip smooth surface			
Handgrip diameter between 1 1/4" and 2"			
Clearance of 1 1/2" between wall and wall rail			
Non-slip surface			
Level platforms (4ft x 4 ft) at every 30 ft, at top, at bottom, at change of direction			

Notes

Location

SITE ACCESS, PATH OF TRAVEL, ENTRANCES			
Specification	Yes	No	Comments/Transition Notes
Site Access			
Accessible path of travel from passenger disembarking area and parking area to accessible entrance		✓	uneven and no direct path
Disembarking area at accessible entrance		✓	
Surface evenly paved or hard-packed		✓	
No ponding of water		✓	
Path of Travel			
Path does not require the use of stairs		✓	Bridges over streams have steps
Path is stable, firm and slip resistant		✓	
3 ft wide minimum		✓	
Slope maximum 1:20 (5%) and maximum cross pitch is 2% (1:50).		✓	
Continuous common surface, no changes in level greater than 1/2 inch		✓	
Any objects protruding onto the pathway must be detected by a person with a visual disability using a cane		✓	
Objects protruding more than 4" from the wall must be within 27" of the ground, or higher than 80"			N/A
Curb on the pathway must have curb cuts at drives, parking and drop-offs			N/A
Entrances N/A			
Primary public entrances accessible to person using wheelchair, must be signed, gotten to independently, and <i>not</i> be the service entrance			
Level space extending 5 ft. from the door, interior and exterior of entrance doors			
Minimum 32" clear width opening (i.e. 36" door with standard hinge)			
At least 18" clear floor area on latch, pull side of door			
Door handle no higher than 48" and operable with a closed fist			
Vestibule is 4 ft plus the width of the door swinging into the space			
Entrance(s) on a level that makes elevators accessible			
Door mats less than 1/2" thick are securely fastened			
Door mats more than 1/2" thick are recessed			
Grates in path of travel have openings of 1/2" maximum			
Signs at non-accessible entrance(s) indicate direction to accessible entrance			
Emergency egress – alarms with flashing lights and audible signals, sufficiently lighted			

Notes

Location

STAIRS and DOORS N/A			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Stairs			
No open risers			
Nosings not projecting			
Treads no less than 11" wide			
Handrails on both sides			
Handrails 34"-38" above tread			
Handrail extends a minimum of 1 ft beyond top and bottom riser (if no safety hazard and space permits)			
Handgrip oval or round			
Handgrip has a smooth surface			
Handgrip diameter between 1¼" and 1½"			
1½" clearance between wall and handrail			
Doors			
Minimum 32" clear opening			
At least 18" clear floor space on pull side of door			
Closing speed minimum 3 seconds to within 3" of the latch			
Maximum pressure 5 pounds interior doors			
Threshold maximum ½" high, beveled on both sides			
Hardware operable with a closed fist (no conventional door knobs or thumb latch devices)			
Hardware minimum 36", maximum 48" above the floor			
Clear, level floor space extends out 5 ft from both sides of the door			
Door adjacent to revolving door is accessible and unlocked			
Doors opening into hazardous area have hardware that is knurled or roughened			

Notes

Location

RESTROOMS – also see Doors and Vestibules NIA			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
5 ft turning space measured 12" from the floor			
At least one Sink:			
Clear floor space of 30" by 48" to allow a forward approach			
Mounted without pedestal or legs, height 34" to top of rim			
Extends at least 22" from the wall			
Open knee space a minimum 19" deep, 30" width, and 27" high			
Cover exposed pipes with insulation			
Faucets operable with closed fist (lever or spring activated handle)			
At least one Stall:			
Accessible to person using wheelchair at 60" wide by 72" deep			
Stall door is 36" wide			
Stall door swings out			
Stall door is self closing			
Stall door has a pull latch			
Lock on stall door is operable with a closed fist, and 32" above the floor			
Coat hook is 54" high			
Toilet			
18" from center to nearest side wall			
42" minimum clear space from center to farthest wall or fixture			
Top of seat 17"-19" above the floor			
Grab Bars			
On back and side wall closest to toilet			
1¼" diameter			
1½" clearance to wall			
Located 30" above and parallel to the floor			
Acid-etched or roughened surface			
42" long			
Fixtures			
Toilet paper dispenser is 24" above floor			
One mirror set a maximum 38" to bottom (if tilted, 42")			
Dispensers (towel, soap, etc) at least one of each a maximum 42" above the floor			

Notes

Location

NIA

FLOORS, DRINKING FOUNTAINS, TELEPHONES			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Floors			
Non-slip surface			
Carpeting is high-density, low pile, non-absorbent, stretched taut, securely anchored			
Corridor width minimum is 3 ft			
Objects (signs, ceiling lights, fixtures) can only protrude 4" into the path of travel from a height of 27" to 80" above the floor			
Drinking Fountains			
Spouts no higher than 36" from floor to outlet			
Hand operated push button or level controls			
Spouts located near front with stream of water as parallel to front as possible			
If recessed, recess a minimum 30" width, and no deeper than depth of fountain			
If no clear knee space underneath, clear floor space 30" x 48" to allow parallel approach			
Telephones			
Highest operating part a maximum 54" above the floor			
Access within 12" of phone, 30" high by 30" wide			
Adjustable volume control on headset so identified			
SIGNS, SIGNALS, AND SWITCHES			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Switches, Controls and Signs			
Switches and controls for light, heat, ventilation, windows, fire alarms, thermostats, etc, must be a minimum of 36" and a maximum of 48" above the floor for a forward reach, a maximum of 54" for a side reach			
Electrical outlets centered no lower than 18" above the floor			
Warning signals must be visual as well as audible			
Signs			
Mounting height must be 60" to centerline of the sign			
Within 18" of door jamb or recessed			
Letters and numbers at least 1/4" high			
Letters and numbers raised .03"			
Letters and numbers contrast with the background color			

Notes

Location

SWIMMING POOLS – accessibility can be via ramp, lifting device, or transfer area NIA			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Ramp at least 34" wide with a non-slip surface extending into the shallow end, slope not exceeding 1:6 with handrails on both sides			
Lifting device			
Transfer area 18" above the path of travel and a minimum of 18" wide			
Unobstructed path of travel not less than 48" wide around pool			
Non-slip surface			

Location

SHOWER ROOMS - Showers must accommodate both wheel-in and transfer use NIA			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Stalls 36" by 60" minimum, with a 36" door opening			
Floors are pitched to drain the stall at the corner farthest from entrance			
Floors are non-slip surface			
Controls operate by a single lever with a pressure balance mixing valve			
Controls are located on the center wall adjacent to the hinged seat			
Shower heads attached to a flexible metal hose			
Shower heads attached to wall mounting adjustable from 42" to 72" above the floor			
Seat is hinged and padded and at least 16" deep, folds upward, securely attached to side wall, height is 18" to the top of the seat, and at least 24" long			
Soap trays without handhold features unless they can support 250 pounds			
2 grab bars are provided, one 30" and one 48" long, or one continuous L shaped bar			
Grab bars are placed horizontally at 36" above the floor line			

Location

PICNICKING NIA			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
A minimum of 5% of the total tables must be accessible with clear space under the table top not less than 30" wide and 19" deep per seating space and not less than 27" clear from the ground to the underside of the table. An additional 29" clear space (totaling 48") must extend beyond the 19" clear space under the table to provide access			
For tables without toe clearance, the knee space under the table must be at least 28" high, 30" wide and 24" deep.			
Top of table no higher than 32" above ground			
Surface of the clear ground space under and around the table must be stable, firm and slip-resistant, and evenly graded with a maximum slope of 2% in all directions			
Accessible tables, grills and fire rings must have clear ground space of at least 36" around the perimeter			

Facility Inventory

Location: Clark Field / North Sagamore Playground

ACTIVITY	EQUIPMENT	NOTES
Picnic Facilities <i>there is one picnic table</i>	Tables & Benches	Located adjacent to accessible paths <i>No</i>
		Access to Open Spaces <i>Yes</i>
		Back and Arm Rests <i>No</i>
		Adequate number <i>No - only one</i>
	Grills <i>N/A</i>	Height of Cooking Surface
	Trash Cans	Located adjacent to accessible paths <i>Yes</i>
Picnic Shelters <i>N/A</i>		Located adjacent to accessible paths
		Located near accessible water fountains, trash can, restroom, parking, etc.
Trails	<i>trail is not connected all the way around by pavement</i>	Surface material <i>Pavement - needs to be redone</i>
		Dimensions <i>3' wide</i>
		Rails <i>No</i>
		Signage (for visually impaired) <i>No</i>
Swimming Facilities <i>N/A</i>	Pools	Entrance
		Location from accessible parking
		Safety features i.e. warning for visually impaired
	Beaches	Location from accessible path into water
		Handrails
		Shade provided
Play Areas (tot lots)	All Play Equipment i.e. swings, slides	Same experience provided to all <i>No</i>
		Access Routes
		Located adjacent to accessible paths <i>No</i>
Game Areas: *ballfield *basketball *tennis	Access Routes	Enough space between equipment for wheelchair <i>Yes</i>
		Located adjacent to accessible paths <i>Yes except for basketball</i>
	Equipment	Berm cuts onto courts <i>Yes</i>
		Height
		Dimensions
	Spectator Seating <i>Yes around baseball fields</i>	
Boat Docks <i>N/A</i>	Access Routes	Located adjacent to accessible paths
		Handrails
Fishing Facilities <i>N/A</i>	Access Routes	Located adjacent to accessible paths
		Handrails
	Equipment	Arm Rests
		Bait Shelves
		Handrails
		Fish Cleaning Tables
Programming <i>N/A</i>	Are special programs at your facilities accessible?	Learn-to-Swim
		Guided Hikes
		Interpretive Programs
Services and Technical Assistance <i>N/A</i>		Information available in alternative formats i.e. for visually impaired
		Process to request interpretive services (i.e. sign language interpreter) for meetings

Recommendations:

- pave path to connect trail and provide access to the play area
- stripe handicap parking spaces
- designate a handicap van space
- pave access to basketball courts

Location:

PARKING			
<i>Total Spaces</i>	<i>Required Accessible Spaces</i>		
Up to 25	1 space		
26-50	2 spaces		
51-75	3 spaces		
76-100	4 spaces		
101-150	5 spaces		
151-200	6 spaces		
201-300	7 spaces		
301-400	8 spaces		
401-500	9 spaces		
<i>Specification for Accessible Spaces</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Accessible space located closest to accessible entrance	✓		
Where spaces cannot be located within 200 ft of accessible entrance, drop-off area is provided within 100 ft.			
Minimum width of 13 ft includes 8 ft space plus 5 ft access aisle		✓	No striped access side
Van space – minimum of 1 van space for every accessible space, 8 ft wide plus 8 ft aisle. Alternative is to make all accessible spaces 11 ft wide with 5 ft aisle.		✓	
Sign with international symbol of accessibility at each space or pair of spaces	✓		Signs are at two spaces only Symbol on pavement
Sign minimum 5 ft, maximum 8 ft to top of sign	✓		
Surface evenly paved or hard-packed (no cracks)	✓		
Surface slope less than 1:20, 5%	✓		
Curbcut to pathway from parking lot at each space or pair of spaces, if sidewalk (curb) is present		✓	N/A - no sidewalk
Curbcut is a minimum width of 3 ft, excluding sloped sides, has sloped sides, all slopes not to exceed 1:12, and textured or painted yellow		✓	
RAMPS N/A - no ramps			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Slope Maximum 1:12			
Minimum width 4 ft between handrails			
Handrails on both sides if ramp is longer than 6 ft			
Handrails at 34" and 19" from ramp surface			
Handrails extend 12" beyond top and bottom			
Handgrip oval or round			
Handgrip smooth surface			
Handgrip diameter between 1½" and 2"			
Clearance of 1½" between wall and wall rail			
Non-slip surface			
Level platforms (4ft x 4 ft) at every 30 ft, at top, at bottom, at change of direction			

Notes

Location

SITE ACCESS, PATH OF TRAVEL, ENTRANCES			
Specification	Yes	No	Comments/Transition Notes
Site Access			
Accessible path of travel from passenger disembarking area and parking area to accessible entrance	✓		
Disembarking area at accessible entrance			There is no dedicated area - but there is space
Surface evenly paved or hard-packed	✓		
No ponding of water	✓		
Path of Travel			
Path does not require the use of stairs	✓		
Path is stable, firm and slip resistant	✓		
3 ft wide minimum	✓		
Slope maximum 1:20 (5%) and maximum cross pitch is 2% (1:50).		—	Yes for one ramp but no for ramp close to tennis courts
Continuous common surface, no changes in level greater than 1/2 inch	✓		
Any objects protruding onto the pathway must be detected by a person with a visual disability using a cane	✓		
Objects protruding more than 4" from the wall must be within 27" of the ground, or higher than 80"		N/A	
Curb on the pathway must have curb cuts at drives, parking and drop-offs		N/A	
Entrances N/A - no building entrances			
Primary public entrances accessible to person using wheelchair, must be signed, gotten to independently, and <i>not</i> be the service entrance			
Level space extending 5 ft. from the door, interior and exterior of entrance doors			
Minimum 32" clear width opening (i.e. 36" door with standard hinge)			
At least 18" clear floor area on latch, pull side of door			
Door handle no higher than 48" and operable with a closed fist			
Vestibule is 4 ft plus the width of the door swinging into the space			
Entrance(s) on a level that makes elevators accessible			
Door mats less than 1/2" thick are securely fastened			
Door mats more than 1/2" thick are recessed			
Grates in path of travel have openings of 1/2" maximum			
Signs at non-accessible entrance(s) indicate direction to accessible entrance			
Emergency egress – alarms with flashing lights and audible signals, sufficiently lighted			

Notes

Location

STAIRS and DOORS N/A			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Stairs			
No open risers			
Nosings not projecting			
Treads no less than 11" wide			
Handrails on both sides			
Handrails 34"-38" above tread			
Handrail extends a minimum of 1 ft beyond top and bottom riser (if no safety hazard and space permits)			
Handgrip oval or round			
Handgrip has a smooth surface			
Handgrip diameter between 1¼" and 1½"			
1½" clearance between wall and handrail			
Doors			
Minimum 32" clear opening			
At least 18" clear floor space on pull side of door			
Closing speed minimum 3 seconds to within 3" of the latch			
Maximum pressure 5 pounds interior doors			
Threshold maximum ½" high, beveled on both sides			
Hardware operable with a closed fist (no conventional door knobs or thumb latch devices)			
Hardware minimum 36", maximum 48" above the floor			
Clear, level floor space extends out 5 ft from both sides of the door			
Door adjacent to revolving door is accessible and unlocked			
Doors opening into hazardous area have hardware that is knurled or roughened			

Notes

Location

Restrooms are closed for the season - unable to assess

RESTROOMS – also see Doors and Vestibules			
<i>Specification</i>	Yes	No	<i>Comments/Transition Notes</i>
5 ft turning space measured 12" from the floor			
At least one Sink:			
Clear floor space of 30" by 48" to allow a forward approach			
Mounted without pedestal or legs, height 34" to top of rim			
Extends at least 22" from the wall			
Open knee space a minimum 19" deep, 30" width, and 27" high			
Cover exposed pipes with insulation			
Faucets operable with closed fist (lever or spring activated handle)			
At least one Stall:			
Accessible to person using wheelchair at 60" wide by 72" deep			
Stall door is 36" wide			
Stall door swings out			
Stall door is self closing			
Stall door has a pull latch			
Lock on stall door is operable with a closed fist, and 32" above the floor			
Coat hook is 54" high			
Toilet			
18" from center to nearest side wall			
42" minimum clear space from center to farthest wall or fixture			
Top of seat 17"-19" above the floor			
Grab Bars			
On back and side wall closest to toilet			
1½" diameter			
1½" clearance to wall			
Located 30" above and parallel to the floor			
Acid-etched or roughened surface			
42" long			
Fixtures			
Toilet paper dispenser is 24" above floor			
One mirror set a maximum 38" to bottom (if tilted, 42")			
Dispensers (towel, soap, etc) at least one of each a maximum 42" above the floor			

Notes

The building that houses the restrooms is not accessible - there is a small step onto the concrete pad to enter the building.

Location

FLOORS, DRINKING FOUNTAINS, TELEPHONES

N/A - unable to assess

Specification	Yes	No	Comments/Transition Notes
Floors			
Non-slip surface			
Carpeting is high-density, low pile, non-absorbent, stretched taut, securely anchored			
Corridor width minimum is 3 ft			
Objects (signs, ceiling lights, fixtures) can only protrude 4" into the path of travel from a height of 27" to 80" above the floor			
Drinking Fountains			
Spouts no higher than 36" from floor to outlet			
Hand operated push button or level controls			
Spouts located near front with stream of water as parallel to front as possible			
If recessed, recess a minimum 30" width, and no deeper than depth of fountain			
If no clear knee space underneath, clear floor space 30" x 48" to allow parallel approach			
Telephones			
Highest operating part a maximum 54" above the floor			
Access within 12" of phone, 30" high by 30" wide			
Adjustable volume control on headset so identified			
SIGNS, SIGNALS, AND SWITCHES			
Specification	Yes	No	Comments/Transition Notes
Switches, Controls and Signs			
Switches and controls for light, heat, ventilation, windows, fire alarms, thermostats, etc, must be a minimum of 36" and a maximum of 48" above the floor for a forward reach, a maximum of 54" for a side reach			
Electrical outlets centered no lower than 18" above the floor			
Warning signals must be visual as well as audible			
Signs			
Mounting height must be 60" to centerline of the sign			
Within 18" of door jamb or recessed			
Letters and numbers at least 1/4" high			
Letters and numbers raised .03"			
Letters and numbers contrast with the background color			

Notes

Location

SWIMMING POOLS – accessibility can be via ramp, lifting device, or transfer area N/A			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Ramp at least 34" wide with a non-slip surface extending into the shallow end, slope not exceeding 1:6 with handrails on both sides			
Lifting device			
Transfer area 18" above the path of travel and a minimum of 18" wide			
Unobstructed path of travel not less than 48" wide around pool			
Non-slip surface			

Location

SHOWER ROOMS - Showers must accommodate both wheel-in and transfer use N/A			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Stalls 36" by 60" minimum, with a 36" door opening			
Floors are pitched to drain the stall at the corner farthest from entrance			
Floors are non-slip surface			
Controls operate by a single lever with a pressure balance mixing valve			
Controls are located on the center wall adjacent to the hinged seat			
Shower heads attached to a flexible metal hose			
Shower heads attached to wall mounting adjustable from 42" to 72" above the floor			
Seat is hinged and padded and at least 16" deep, folds upward, securely attached to side wall, height is 18" to the top of the seat, and at least 24" long			
Soap trays without handhold features unless they can support 250 pounds			
2 grab bars are provided, one 30" and one 48" long, or one continuous L shaped bar			
Grab bars are placed horizontally at 36" above the floor line			

Location

PICNICKING N/A			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
A minimum of 5% of the total tables must be accessible with clear space under the table top not less than 30" wide and 19" deep per seating space and not less than 27" clear from the ground to the underside of the table. An additional 29" clear space (totaling 48") must extend beyond the 19" clear space under the table to provide access			
For tables without toe clearance, the knee space under the table must be at least 28" high, 30" wide and 24" deep.			
Top of table no higher than 32" above ground			
Surface of the clear ground space under and around the table must be stable, firm and slip-resistant, and evenly graded with a maximum slope of 2% in all directions			
Accessible tables, grills and fire rings must have clear ground space of at least 36" around the perimeter			

Facility Inventory

Location: Clark Pond - Standish Road Property

ACTIVITY	EQUIPMENT	NOTES
Picnic Facilities N/A	Tables & Benches	Located adjacent to accessible paths
		Access to Open Spaces
		Back and Arm Rests
		Adequate number
	Grills	Height of Cooking Surface
Trash Cans	Picnic Shelters	Located adjacent to accessible paths
		Located adjacent to accessible paths
		Located near accessible water fountains, trash can, restroom, parking, etc.
Trails N/A		Surface material
		Dimensions
		Rails
		Signage (for visually impaired)
Swimming Facilities N/A	Pools	Entrance
		Location from accessible parking
		Safety features i.e. warning for visually impaired
	Beaches	Location from accessible path into water
		Handrails
		Shade provided
Play Areas (tot lots) N/A	All Play Equipment i.e. swings, slides	Same experience provided to all
	Access Routes	Located adjacent to accessible paths Enough space between equipment for wheelchair
Game Areas: *ballfield *basketball *tennis N/A	Access Routes	Located adjacent to accessible paths Berm cuts onto courts
	Equipment	Height
		Spectator Seating
Boat Docks N/A	Access Routes	Located adjacent to accessible paths
		Handrails
Fishing Facilities N/A	Access Routes	Located adjacent to accessible paths
		Handrails
	Equipment	Arm Rests
		Bait Shelves
		Fish Cleaning Tables
Programming N/A	Are special programs at your facilities accessible?	Learn-to-Swim
		Guided Hikes
		Interpretive Programs
Services and Technical Assistance N/A		Information available in alternative formats i.e. for visually impaired
		Process to request interpretive services (i.e. sign language interpreter) for meetings

Location:

NIA

PARKING			
Total Spaces	Required Accessible Spaces		
Up to 25	1 space		
26-50	2 spaces		
51-75	3 spaces		
76-100	4 spaces		
101-150	5 spaces		
151-200	6 spaces		
201-300	7 spaces		
301-400	8 spaces		
401-500	9 spaces		
Specification for Accessible Spaces	Yes	No	Comments/Transition Notes
Accessible space located closest to accessible entrance			
Where spaces cannot be located within 200 ft of accessible entrance, drop-off area is provided within 100 ft.			
Minimum width of 13 ft includes 8 ft space plus 5 ft access aisle			
Van space – minimum of 1 van space for every accessible space, 8 ft wide plus 8 ft aisle. Alternative is to make all accessible spaces 11 ft wide with 5 ft aisle.			
Sign with international symbol of accessibility at each space or pair of spaces			
Sign minimum 5 ft, maximum 8 ft to top of sign			
Surface evenly paved or hard-packed (no cracks)			
Surface slope less than 1:20, 5%			
Curbscut to pathway from parking lot at each space or pair of spaces, if sidewalk (curb) is present			
Curbscut is a minimum width of 3 ft, excluding sloped sides, has sloped sides, all slopes not to exceed 1:12, and textured or painted yellow			
RAMPS			
Specification	Yes	No	Comments/Transition Notes
Slope Maximum 1:12			
Minimum width 4 ft between handrails			
Handrails on both sides if ramp is longer than 6 ft			
Handrails at 34" and 19" from ramp surface			
Handrails extend 12" beyond top and bottom			
Handgrip oval or round			
Handgrip smooth surface			
Handgrip diameter between 1 1/4" and 2"			
Clearance of 1 1/2" between wall and wall rail			
Non-slip surface			
Level platforms (4ft x 4 ft) at every 30 ft, at top, at bottom, at change of direction			

Notes

There is no parking lot. People can park cars on the side of the road.

Location

NA

SITE ACCESS, PATH OF TRAVEL, ENTRANCES			
Specification	Yes	No	Comments/Transition Notes
Site Access			
Accessible path of travel from passenger disembarking area and parking area to accessible entrance			
Disembarking area at accessible entrance			
Surface evenly paved or hard-packed			
No ponding of water			
Path of Travel			
Path does not require the use of stairs			
Path is stable, firm and slip resistant			
3 ft wide minimum			
Slope maximum 1:20 (5%) and maximum cross pitch is 2% (1:50).			
Continuous common surface, no changes in level greater than 1/2 inch			
Any objects protruding onto the pathway must be detected by a person with a visual disability using a cane			
Objects protruding more than 4" from the wall must be within 27" of the ground, or higher than 80"			
Curb on the pathway must have curb cuts at drives, parking and drop-offs			
Entrances			
Primary public entrances accessible to person using wheelchair, must be signed, gotten to independently, and <i>not</i> be the service entrance			
Level space extending 5 ft. from the door, interior and exterior of entrance doors			
Minimum 32" clear width opening (i.e. 36" door with standard hinge)			
At least 18" clear floor area on latch, pull side of door			
Door handle no higher than 48" and operable with a closed fist			
Vestibule is 4 ft plus the width of the door swinging into the space			
Entrance(s) on a level that makes elevators accessible			
Door mats less than 1/2" thick are securely fastened			
Door mats more than 1/2" thick are recessed			
Grates in path of travel have openings of 1/2" maximum			
Signs at non-accessible entrance(s) indicate direction to accessible entrance			
Emergency egress – alarms with flashing lights and audible signals, sufficiently lighted			

Notes

Location

STAIRS and DOORS

N/A

<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Stairs			
No open risers			
Nosings not projecting			
Treads no less than 11" wide			
Handrails on both sides			
Handrails 34"-38" above tread			
Handrail extends a minimum of 1 ft beyond top and bottom riser (if no safety hazard and space permits)			
Handgrip oval or round			
Handgrip has a smooth surface			
Handgrip diameter between 1¼" and 1½"			
1½" clearance between wall and handrail			
Doors			
Minimum 32" clear opening			
At least 18" clear floor space on pull side of door			
Closing speed minimum 3 seconds to within 3" of the latch			
Maximum pressure 5 pounds interior doors			
Threshold maximum ½" high, beveled on both sides			
Hardware operable with a closed fist (no conventional door knobs or thumb latch devices)			
Hardware minimum 36", maximum 48" above the floor			
Clear, level floor space extends out 5 ft from both sides of the door			
Door adjacent to revolving door is accessible and unlocked			
Doors opening into hazardous area have hardware that is knurled or roughened			

Notes

Location

RESTROOMS – also see Doors and Vestibules N/A			
Specification	Yes	No	Comments/Transition Notes
5 ft turning space measured 12" from the floor			
At least one Sink:			
Clear floor space of 30" by 48" to allow a forward approach			
Mounted without pedestal or legs, height 34" to top of rim			
Extends at least 22" from the wall			
Open knee space a minimum 19" deep, 30" width, and 27" high			
Cover exposed pipes with insulation			
Faucets operable with closed fist (lever or spring activated handle)			
At least one Stall:			
Accessible to person using wheelchair at 60" wide by 72" deep			
Stall door is 36" wide			
Stall door swings out			
Stall door is self closing			
Stall door has a pull latch			
Lock on stall door is operable with a closed fist, and 32" above the floor			
Coat hook is 54" high			
Toilet			
18" from center to nearest side wall			
42" minimum clear space from center to farthest wall or fixture			
Top of seat 17"-19" above the floor			
Grab Bars			
On back and side wall closest to toilet			
1½" diameter			
1½" clearance to wall			
Located 30" above and parallel to the floor			
Acid-etched or roughened surface			
42" long			
Fixtures			
Toilet paper dispenser is 24" above floor			
One mirror set a maximum 38" to bottom (if tilted, 42")			
Dispensers (towel, soap, etc) at least one of each a maximum 42" above the floor			

Notes

Location

NIA

FLOORS, DRINKING FOUNTAINS, TELEPHONES			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Floors			
Non-slip surface			
Carpeting is high-density, low pile, non-absorbent, stretched taut, securely anchored			
Corridor width minimum is 3 ft			
Objects (signs, ceiling lights, fixtures) can only protrude 4" into the path of travel from a height of 27" to 80" above the floor			
Drinking Fountains			
Spouts no higher than 36" from floor to outlet			
Hand operated push button or level controls			
Spouts located near front with stream of water as parallel to front as possible			
If recessed, recess a minimum 30" width, and no deeper than depth of fountain			
If no clear knee space underneath, clear floor space 30" x 48" to allow parallel approach			
Telephones			
Highest operating part a maximum 54" above the floor			
Access within 12" of phone, 30" high by 30" wide			
Adjustable volume control on headset so identified			
SIGNS, SIGNALS, AND SWITCHES			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Switches, Controls and Signs			
Switches and controls for light, heat, ventilation, windows, fire alarms, thermostats, etc, must be a minimum of 36" and a maximum of 48" above the floor for a forward reach, a maximum of 54" for a side reach			
Electrical outlets centered no lower than 18" above the floor			
Warning signals must be visual as well as audible			
Signs			
Mounting height must be 60" to centerline of the sign			
Within 18" of door jamb or recessed			
Letters and numbers at least 1/4" high			
Letters and numbers raised .03"			
Letters and numbers contrast with the background color			

Notes

Location

SWIMMING POOLS – accessibility can be via ramp, lifting device, or transfer area NIA			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Ramp at least 34" wide with a non-slip surface extending into the shallow end, slope not exceeding 1:6 with handrails on both sides			
Lifting device			
Transfer area 18" above the path of travel and a minimum of 18" wide			
Unobstructed path of travel not less than 48" wide around pool			
Non-slip surface			

Location

SHOWER ROOMS - Showers must accommodate both wheel-in and transfer use NIA			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Stalls 36" by 60" minimum, with a 36" door opening			
Floors are pitched to drain the stall at the corner farthest from entrance			
Floors are non-slip surface			
Controls operate by a single lever with a pressure balance mixing valve			
Controls are located on the center wall adjacent to the hinged seat			
Shower heads attached to a flexible metal hose			
Shower heads attached to wall mounting adjustable from 42" to 72" above the floor			
Seat is hinged and padded and at least 16" deep, folds upward, securely attached to side wall, height is 18" to the top of the seat, and at least 24" long			
Soap trays without handhold features unless they can support 250 pounds			
2 grab bars are provided, one 30" and one 48" long, or one continuous L shaped bar			
Grab bars are placed horizontally at 36" above the floor line			

Location

PICNICKING NIA			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
A minimum of 5% of the total tables must be accessible with clear space under the table top not less than 30" wide and 19" deep per seating space and not less than 27" clear from the ground to the underside of the table. An additional 29" clear space (totaling 48") must extend beyond the 19" clear space under the table to provide access			
For tables without toe clearance, the knee space under the table must be at least 28" high, 30" wide and 24" deep.			
Top of table no higher than 32" above ground			
Surface of the clear ground space under and around the table must be stable, firm and slip-resistant, and evenly graded with a maximum slope of 2% in all directions			
Accessible tables, grills and fire rings must have clear ground space of at least 36" around the perimeter			

Eel Pond Beachway

Location: 55 Eel Pond Rd

Facility Inventory

ACTIVITY	EQUIPMENT	NOTES
Picnic Facilities N/A	Tables & Benches	Located adjacent to accessible paths
		Access to Open Spaces
	Grills	Back and Arm Rests
		Adequate number
	Trash Cans	Height of Cooking Surface
Picnic Shelters	Located adjacent to accessible paths	
	Located near accessible water fountains, trash can, restroom, parking, etc.	
Trails N/A		Surface material
		Dimensions
		Rails
		Signage (for visually impaired)
Swimming Facilities	Pools	Entrance
		Location from accessible parking
		Safety features i.e. warning for visually impaired
	Beaches	Location from accessible path into water No
		Handrails No
	Location from accessible parking 100'	
	Shade provided No	
Play Areas (tot lots) N/A	All Play Equipment i.e. swings, slides	Same experience provided to all
	Access Routes	Located adjacent to accessible paths
Game Areas: *ballfield *basketball *tennis N/A	Access Routes	Enough space between equipment for wheelchair
		Located adjacent to accessible paths
	Equipment	Berm cuts onto courts
		Height
		Dimensions
	Spectator Seating	
Boat Docks N/A	Access Routes	Located adjacent to accessible paths
		Handrails
Fishing Facilities N/A	Access Routes	Located adjacent to accessible paths
		Handrails
	Equipment	Arm Rests
		Bait Shelves
		Handrails
	Fish Cleaning Tables	
Programming N/A	Are special programs at your facilities accessible?	Learn-to-Swim
		Guided Hikes
		Interpretive Programs
Services and Technical Assistance N/A		Information available in alternative formats i.e. for visually impaired
		Process to request interpretive services (i.e. sign language interpreter) for meetings

Parking is grass, could be more accessible

Location:

PARKING			
Total Spaces		Required Accessible Spaces	NONE
Up to 25 ✓		1 space	
26-50		2 spaces	
51-75		3 spaces	
76-100		4 spaces	
101-150		5 spaces	
151-200		6 spaces	
201-300		7 spaces	
301-400		8 spaces	
401-500		9 spaces	
Specification for Accessible Spaces	Yes	No	Comments/Transition Notes
Accessible space located closest to accessible entrance N/A			
Where spaces cannot be located within 200 ft of accessible entrance, drop-off area is provided within 100 ft.			
Minimum width of 13 ft includes 8 ft space plus 5 ft access aisle			
Van space – minimum of 1 van space for every accessible space, 8 ft wide plus 8 ft aisle. Alternative is to make all accessible spaces 11 ft wide with 5 ft aisle.			
Sign with international symbol of accessibility at each space or pair of spaces			
Sign minimum 5 ft, maximum 8 ft to top of sign			
Surface evenly paved or hard-packed (no cracks)			
Surface slope less than 1:20, 5%			
Curbscut to pathway from parking lot at each space or pair of spaces, if sidewalk (curb) is present			
Curbscut is a minimum width of 3 ft, excluding sloped sides, has sloped sides, all slopes not to exceed 1:12, and textured or painted yellow			
RAMPS			
Specification	Yes	No	Comments/Transition Notes
Slope Maximum 1:12			
Minimum width 4 ft between handrails			
Handrails on both sides if ramp is longer than 6 ft			
Handrails at 34" and 19" from ramp surface			
Handrails extend 12" beyond top and bottom			
Handgrip oval or round			
Handgrip smooth surface			
Handgrip diameter between 1 1/4" and 2"			
Clearance of 1 1/2" between wall and wall rail			
Non-slip surface			
Level platforms (4ft x 4 ft) at every 30 ft, at top, at bottom, at change of direction			

Notes

Location

SITE ACCESS, PATH OF TRAVEL, ENTRANCES			
Specification	Yes	No	Comments/Transition Notes
Site Access			
Accessible path of travel from passenger disembarking area and parking area to accessible entrance	✓		Smooth dirt/gravel
Disembarking area at accessible entrance		x	
Surface evenly paved or hard-packed	x		
No ponding of water	x		
Path of Travel			
Path does not require the use of stairs	x		
Path is stable, firm and slip resistant	x		
3 ft wide minimum	x		6-7
Slope maximum 1:20 (5%) and maximum cross pitch is 2% (1:50).	x		
Continuous common surface, no changes in level greater than 1/2 inch	x		
Any objects protruding onto the pathway must be detected by a person with a visual disability using a cane	x		
Objects protruding more than 4" from the wall must be within 27" of the ground, or higher than 80"	x		
Curb on the pathway must have curb cuts at drives, parking and drop-offs		N/A	
Entrances			
Primary public entrances accessible to person using wheelchair, must be signed, gotten to independently, and <i>not</i> be the service entrance			
Level space extending 5 ft. from the door, interior and exterior of entrance doors			
Minimum 32" clear width opening (i.e. 36" door with standard hinge)			
At least 18" clear floor area on latch, pull side of door			
Door handle no higher than 48" and operable with a closed fist			
Vestibule is 4 ft plus the width of the door swinging into the space			
Entrance(s) on a level that makes elevators accessible			
Door mats less than 1/2" thick are securely fastened			
Door mats more than 1/2" thick are recessed			
Grates in path of travel have openings of 1/2" maximum			
Signs at non-accessible entrance(s) indicate direction to accessible entrance			
Emergency egress – alarms with flashing lights and audible signals, sufficiently lighted			

Notes

Location

STAIRS and DOORS N/A			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Stairs			
No open risers			
Nosings not projecting			
Treads no less than 11" wide			
Handrails on both sides			
Handrails 34"-38" above tread			
Handrail extends a minimum of 1 ft beyond top and bottom riser (if no safety hazard and space permits)			
Handgrip oval or round			
Handgrip has a smooth surface			
Handgrip diameter between 1¼" and 1½"			
1½" clearance between wall and handrail			
Doors			
Minimum 32" clear opening			
At least 18" clear floor space on pull side of door			
Closing speed minimum 3 seconds to within 3" of the latch			
Maximum pressure 5 pounds interior doors			
Threshold maximum ½" high, beveled on both sides			
Hardware operable with a closed fist (no conventional door knobs or thumb latch devices)			
Hardware minimum 36", maximum 48" above the floor			
Clear, level floor space extends out 5 ft from both sides of the door			
Door adjacent to revolving door is accessible and unlocked			
Doors opening into hazardous area have hardware that is knurled or roughened			

Notes

Location

RESTROOMS – also see Doors and Vestibules

N/A

<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
5 ft turning space measured 12" from the floor			
At least one Sink:			
Clear floor space of 30" by 48" to allow a forward approach			
Mounted without pedestal or legs, height 34" to top of rim			
Extends at least 22" from the wall			
Open knee space a minimum 19" deep, 30" width, and 27" high			
Cover exposed pipes with insulation			
Faucets operable with closed fist (lever or spring activated handle)			
At least one Stall:			
Accessible to person using wheelchair at 60" wide by 72" deep			
Stall door is 36" wide			
Stall door swings out			
Stall door is self closing			
Stall door has a pull latch			
Lock on stall door is operable with a closed fist, and 32" above the floor			
Coat hook is 54" high			
Toilet			
18" from center to nearest side wall			
42" minimum clear space from center to farthest wall or fixture			
Top of seat 17"-19" above the floor			
Grab Bars			
On back and side wall closest to toilet			
1½" diameter			
1½" clearance to wall			
Located 30" above and parallel to the floor			
Acid-etched or roughened surface			
42" long			
Fixtures			
Toilet paper dispenser is 24" above floor			
One mirror set a maximum 38" to bottom (if tilted, 42")			
Dispensers (towel, soap, etc) at least one of each a maximum 42" above the floor			

Notes

Location

N/A

FLOORS, DRINKING FOUNTAINS, TELEPHONES			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Floors			
Non-slip surface			
Carpeting is high-density, low pile, non-absorbent, stretched taut, securely anchored			
Corridor width minimum is 3 ft			
Objects (signs, ceiling lights, fixtures) can only protrude 4" into the path of travel from a height of 27" to 80" above the floor			
Drinking Fountains			
Spouts no higher than 36" from floor to outlet			
Hand operated push button or level controls			
Spouts located near front with stream of water as parallel to front as possible			
If recessed, recess a minimum 30" width, and no deeper than depth of fountain			
If no clear knee space underneath, clear floor space 30" x 48" to allow parallel approach			
Telephones			
Highest operating part a maximum 54" above the floor			
Access within 12" of phone, 30" high by 30" wide			
Adjustable volume control on headset so identified			
SIGNS, SIGNALS, AND SWITCHES			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Switches, Controls and Signs			
Switches and controls for light, heat, ventilation, windows, fire alarms, thermostats, etc, must be a minimum of 36" and a maximum of 48" above the floor for a forward reach, a maximum of 54" for a side reach			
Electrical outlets centered no lower than 18" above the floor			
Warning signals must be visual as well as audible			
Signs			
Mounting height must be 60" to centerline of the sign			
Within 18" of door jamb or recessed			
Letters and numbers at least 1 1/4" high			
Letters and numbers raised .03"			
Letters and numbers contrast with the background color			

Notes

Location N/A

SWIMMING POOLS – accessibility can be via ramp, lifting device, or transfer area			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Ramp at least 34" wide with a non-slip surface extending into the shallow end, slope not exceeding 1:6 with handrails on both sides			
Lifting device			
Transfer area 18" above the path of travel and a minimum of 18" wide			
Unobstructed path of travel not less than 48" wide around pool			
Non-slip surface			

Location N/A

SHOWER ROOMS - Showers must accommodate both wheel-in and transfer use			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Stalls 36" by 60" minimum, with a 36" door opening			
Floors are pitched to drain the stall at the corner farthest from entrance			
Floors are non-slip surface			
Controls operate by a single lever with a pressure balance mixing valve			
Controls are located on the center wall adjacent to the hinged seat			
Shower heads attached to a flexible metal hose			
Shower heads attached to wall mounting adjustable from 42" to 72" above the floor			
Seat is hinged and padded and at least 16" deep, folds upward, securely attached to side wall, height is 18" to the top of the seat, and at least 24" long			
Soap trays without handhold features unless they can support 250 pounds			
2 grab bars are provided, one 30" and one 48" long, or one continuous L shaped bar			
Grab bars are placed horizontally at 36" above the floor line			

Location N/A

PICNICKING			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
A minimum of 5% of the total tables must be accessible with clear space under the table top not less than 30" wide and 19" deep per seating space and not less than 27" clear from the ground to the underside of the table. An additional 29" clear space (totaling 48") must extend beyond the 19" clear space under the table to provide access			
For tables without toe clearance, the knee space under the table must be at least 28" high, 30" wide and 24" deep.			
Top of table no higher than 32" above ground			
Surface of the clear ground space under and around the table must be stable, firm and slip-resistant, and evenly graded with a maximum slope of 2% in all directions			
Accessible tables, grills and fire rings must have clear ground space of at least 36" around the perimeter			

Eldridge Park
Queen Sewell Park / Patric's Place

Facility Inventory

Location:

ACTIVITY	EQUIPMENT	NOTES
Picnic Facilities <i>N/A</i>	Tables & Benches	Located adjacent to accessible paths
		Access to Open Spaces
		Back and Arm Rests
		Adequate number
	Grills	Height of Cooking Surface
Trash Cans	Located adjacent to accessible paths	
	Located adjacent to accessible paths	
	Located near accessible water fountains, trash can, restroom, parking, etc.	
Trails <i>N/A</i>	Surface material	
	Dimensions	
	Rails	
	Signage (for visually impaired)	
Swimming Facilities <i>N/A</i>	Pools	Entrance
		Location from accessible parking
		Safety features i.e. warning for visually impaired
	Beaches	Location from accessible path into water
		Handrails
		Shade provided
Play Areas (tot lots)	All Play Equipment i.e. swings, slides	Same experience provided to all <i>No</i>
	Access Routes	Located adjacent to accessible paths <i>Needs improvement</i> Enough space between equipment for wheelchair <i>Yes</i>
Game Areas: *ballfield *basketball *tennis	Access Routes	Located adjacent to accessible paths <i>Yes</i>
		Berm cuts onto courts <i>N/A</i>
	Equipment	Height <i>N/A</i>
		Spectator Seating <i>Yes - limited</i>
Boat Docks <i>N/A</i>	Access Routes	Located adjacent to accessible paths
		Handrails
Fishing Facilities <i>N/A</i>	Access Routes	Located adjacent to accessible paths
		Handrails
	Equipment	Arm Rests
		Bait Shelves
		Fish Cleaning Tables
Programming <i>N/A</i>	Are special programs at your facilities accessible?	Learn-to-Swim
		Guided Hikes
		Interpretive Programs
Services and Technical Assistance <i>N/A</i>		Information available in alternative formats i.e. for visually impaired
		Process to request interpretive services (i.e. sign language interpreter) for meetings

Location:

PARKING			
<i>Total Spaces</i>	<i>Required Accessible Spaces</i>		
Up to 25	1 space None		
26-50	2 spaces		
51-75	3 spaces		
76-100	4 spaces		
101-150	5 spaces		
151-200	6 spaces		
201-300	7 spaces		
301-400	8 spaces		
401-500	9 spaces		
<i>Specification for Accessible Spaces</i>	Yes	No	<i>Comments/Transition Notes</i>
Accessible space located closest to accessible entrance		✓	
Where spaces cannot be located within 200 ft of accessible entrance, drop-off area is provided within 100 ft.		✓	
Minimum width of 13 ft includes 8 ft space plus 5 ft access aisle		✓	
Van space – minimum of 1 van space for every accessible space, 8 ft wide plus 8 ft aisle. Alternative is to make all accessible spaces 11 ft wide with 5 ft aisle.		✓	
Sign with international symbol of accessibility at each space or pair of spaces		✓	
Sign minimum 5 ft, maximum 8 ft to top of sign		✓	
Surface evenly paved or hard-packed (no cracks)		✓	
Surface slope less than 1:20, 5%	✓		
Curbscut to pathway from parking lot at each space or pair of spaces, if sidewalk (curb) is present			No curb
Curbscut is a minimum width of 3 ft, excluding sloped sides, has sloped sides, all slopes not to exceed 1:12, and textured or painted yellow			
RAMPS NIA			
<i>Specification</i>	Yes	No	<i>Comments/Transition Notes</i>
Slope Maximum 1:12			
Minimum width 4 ft between handrails			
Handrails on both sides if ramp is longer than 6 ft			
Handrails at 34" and 19" from ramp surface			
Handrails extend 12" beyond top and bottom			
Handgrip oval or round			
Handgrip smooth surface			
Handgrip diameter between 1¼" and 2"			
Clearance of 1½" between wall and wall rail			
Non-slip surface			
Level platforms (4ft x 4 ft) at every 30 ft, at top, at bottom, at change of direction			

Notes

Designated handicap spaces and van space is needed

Location

SITE ACCESS, PATH OF TRAVEL, ENTRANCES			
Specification	Yes	No	Comments/Transition Notes
Site Access			
Accessible path of travel from passenger disembarking area and parking area to accessible entrance			N/A
Disembarking area at accessible entrance			N/A
Surface evenly paved or hard-packed		✓	
No ponding of water	✓	✓	
Path of Travel			
Path does not require the use of stairs	✓		
Path is stable, firm and slip resistant		✓	
3 ft wide minimum	✓	✓	Needs to be paved access to playground to be widened
Slope maximum 1:20 (5%) and maximum cross pitch is 2% (1:50).	✓		
Continuous common surface, no changes in level greater than 1/2 inch		✓	
Any objects protruding onto the pathway must be detected by a person with a visual disability using a cane		✓	
Objects protruding more than 4" from the wall must be within 27" of the ground, or higher than 80"			N/A
Curb on the pathway must have curb cuts at drives, parking and drop-offs			N/A
Entrances			
Primary public entrances accessible to person using wheelchair, must be signed, gotten to independently, and <i>not</i> be the service entrance			N/A
Level space extending 5 ft. from the door, interior and exterior of entrance doors			
Minimum 32" clear width opening (i.e. 36" door with standard hinge)			
At least 18" clear floor area on latch, pull side of door			
Door handle no higher than 48" and operable with a closed fist			
Vestibule is 4 ft plus the width of the door swinging into the space			
Entrance(s) on a level that makes elevators accessible			
Door mats less than 1/2" thick are securely fastened			
Door mats more than 1/2" thick are recessed			
Grates in path of travel have openings of 1/2" maximum			
Signs at non-accessible entrance(s) indicate direction to accessible entrance			
Emergency egress – alarms with flashing lights and audible signals, sufficiently lighted			

Notes

Path to spectator seating at field could be improved
 Access to playground could be widened

Location

STAIRS and DOORS N/A			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Stairs			
No open risers			
Nosings not projecting			
Treads no less than 11" wide			
Handrails on both sides			
Handrails 34"-38" above tread			
Handrail extends a minimum of 1 ft beyond top and bottom riser (if no safety hazard and space permits)			
Handgrip oval or round			
Handgrip has a smooth surface			
Handgrip diameter between 1¼" and 1½"			
1½" clearance between wall and handrail			
Doors			
Minimum 32" clear opening			
At least 18" clear floor space on pull side of door			
Closing speed minimum 3 seconds to within 3" of the latch			
Maximum pressure 5 pounds interior doors			
Threshold maximum ½" high, beveled on both sides			
Hardware operable with a closed fist (no conventional door knobs or thumb latch devices)			
Hardware minimum 36", maximum 48" above the floor			
Clear, level floor space extends out 5 ft from both sides of the door			
Door adjacent to revolving door is accessible and unlocked			
Doors opening into hazardous area have hardware that is knurled or roughened			

Notes

Location

RESTROOMS – also see Doors and Vestibules			
Specification	Yes	No	Comments/Transition Notes
5 ft turning space measured 12" from the floor			
At least one Sink:			
Clear floor space of 30" by 48" to allow a forward approach			
Mounted without pedestal or legs, height 34" to top of rim			
Extends at least 22" from the wall			
Open knee space a minimum 19" deep, 30" width, and 27" high			
Cover exposed pipes with insulation			
Faucets operable with closed fist (lever or spring activated handle)			
At least one Stall:			
Accessible to person using wheelchair at 60" wide by 72" deep			
Stall door is 36" wide			
Stall door swings out			
Stall door is self closing			
Stall door has a pull latch			
Lock on stall door is operable with a closed fist, and 32" above the floor			
Coat hook is 54" high			
Toilet			
18" from center to nearest side wall			
42" minimum clear space from center to farthest wall or fixture			
Top of seat 17"-19" above the floor			
Grab Bars			
On back and side wall closest to toilet			
1 1/4" diameter			
1 1/2" clearance to wall			
Located 30" above and parallel to the floor			
Acid-etched or roughened surface			
42" long			
Fixtures			
Toilet paper dispenser is 24" above floor			
One mirror set a maximum 38" to bottom (if tilted, 42")			
Dispensers (towel, soap, etc) at least one of each a maximum 42" above the floor			

NIA

Notes

Location

FLOORS, DRINKING FOUNTAINS, TELEPHONES N/A			
Specification	Yes	No	Comments/Transition Notes
Floors			
Non-slip surface			
Carpeting is high-density, low pile, non-absorbent, stretched taut, securely anchored			
Corridor width minimum is 3 ft			
Objects (signs, ceiling lights, fixtures) can only protrude 4" into the path of travel from a height of 27" to 80" above the floor			
Drinking Fountains			
Spouts no higher than 36" from floor to outlet			
Hand operated push button or level controls			
Spouts located near front with stream of water as parallel to front as possible			
If recessed, recess a minimum 30" width, and no deeper than depth of fountain			
If no clear knee space underneath, clear floor space 30" x 48" to allow parallel approach			
Telephones			
Highest operating part a maximum 54" above the floor			
Access within 12" of phone, 30" high by 30" wide			
Adjustable volume control on headset so identified			
SIGNS, SIGNALS, AND SWITCHES			
Specification	Yes	No	Comments/Transition Notes
Switches, Controls and Signs			
Switches and controls for light, heat, ventilation, windows, fire alarms, thermostats, etc, must be a minimum of 36" and a maximum of 48" above the floor for a forward reach, a maximum of 54" for a side reach			
Electrical outlets centered no lower than 18" above the floor			
Warning signals must be visual as well as audible			
Signs			
Mounting height must be 60" to centerline of the sign			
Within 18" of door jamb or recessed			
Letters and numbers at least 1/4" high			
Letters and numbers raised .03"			
Letters and numbers contrast with the background color			

Notes

Location

SWIMMING POOLS – accessibility can be via ramp, lifting device, or transfer area N/A			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Ramp at least 34" wide with a non-slip surface extending into the shallow end, slope not exceeding 1:6 with handrails on both sides			
Lifting device			
Transfer area 18" above the path of travel and a minimum of 18" wide			
Unobstructed path of travel not less than 48" wide around pool			
Non-slip surface			

Location

SHOWER ROOMS - Showers must accommodate both wheel-in and transfer use N/A			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Stalls 36" by 60" minimum, with a 36" door opening			
Floors are pitched to drain the stall at the corner farthest from entrance			
Floors are non-slip surface			
Controls operate by a single lever with a pressure balance mixing valve			
Controls are located on the center wall adjacent to the hinged seat			
Shower heads attached to a flexible metal hose			
Shower heads attached to wall mounting adjustable from 42" to 72" above the floor			
Seat is hinged and padded and at least 16" deep, folds upward, securely attached to side wall, height is 18" to the top of the seat, and at least 24" long			
Soap trays without handhold features unless they can support 250 pounds			
2 grab bars are provided, one 30" and one 48" long, or one continuous L shaped bar			
Grab bars are placed horizontally at 36" above the floor line			

Location

PICNICKING N/A			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
A minimum of 5% of the total tables must be accessible with clear space under the table top not less than 30" wide and 19" deep per seating space and not less than 27" clear from the ground to the underside of the table. An additional 29" clear space (totaling 48") must extend beyond the 19" clear space under the table to provide access			
For tables without toe clearance, the knee space under the table must be at least 28" high, 30" wide and 24" deep.			
Top of table no higher than 32" above ground			
Surface of the clear ground space under and around the table must be stable, firm and slip-resistant, and evenly graded with a maximum slope of 2% in all directions			
Accessible tables, grills and fire rings must have clear ground space of at least 36" around the perimeter			

Facility Inventory

Location: Gray Gables Beach

ACTIVITY	EQUIPMENT	NOTES	
Picnic Facilities N/A	Tables & Benches	Located adjacent to accessible paths	
		Access to Open Spaces	
		Back and Arm Rests	
		Adequate number	
	Grills	Height of Cooking Surface	
	Trash Cans	Located adjacent to accessible paths	
Picnic Shelters	Picnic Shelters	Located adjacent to accessible paths	
		Located near accessible water fountains, trash can, restroom, parking, etc.	
Trails N/A		Surface material	
		Dimensions	
		Rails	
		Signage (for visually impaired)	
Swimming Facilities	Pools N/A	Entrance	
		Location from accessible parking	
		Safety features i.e. warning for visually impaired	
	Beaches	Location from accessible path into water	no
		Handrails	no
		Location from accessible parking	no
Shade provided		no	
Play Areas (tot lots) N/A	All Play Equipment i.e. swings, slides	Same experience provided to all	
	Access Routes	Located adjacent to accessible paths	
		Enough space between equipment for wheelchair	
Game Areas: *ballfield *basketball *tennis N/A	Access Routes	Located adjacent to accessible paths	
		Berm cuts onto courts	
	Equipment	Height	
		Dimensions	
Spectator Seating			
	Boat Docks N/A	Access Routes	Located adjacent to accessible paths
Handrails			
Fishing Facilities N/A	Access Routes	Located adjacent to accessible paths	
		Handrails	
	Equipment	Arm Rests	
		Bait Shelves	
		Handrails	
Fish Cleaning Tables			
	Programming N/A	Are special programs at your facilities accessible?	Learn-to-Swim
			Guided Hikes
Interpretive Programs			
Services and Technical Assistance N/A		Information available in alternative formats i.e. for visually impaired	
		Process to request interpretive services (i.e. sign language interpreter) for meetings	

Location:

PARKING			
Total Spaces	Required Accessible Spaces		
Up to 25	1 space		
26-50	2 spaces		
51-75	3 spaces		
76-100	4 spaces		
101-150	5 spaces		
151-200	6 spaces		
201-300	7 spaces		
301-400	8 spaces		
401-500	9 spaces		
Specification for Accessible Spaces	Yes	No	Comments/Transition Notes
Accessible space located closest to accessible entrance	✓		
Where spaces cannot be located within 200 ft of accessible entrance, drop-off area is provided within 100 ft.			
Minimum width of 13 ft includes 8 ft space plus 5 ft access aisle	✓		
Van space – minimum of 1 van space for every accessible space, 8 ft wide plus 8 ft aisle. Alternative is to make all accessible spaces 11 ft wide with 5 ft aisle.		✓	
Sign with international symbol of accessibility at each space or pair of spaces	✓		
Sign minimum 5 ft, maximum 8 ft to top of sign	✓		
Surface evenly paved or hard-packed (no cracks)	✓		
Surface slope less than 1:20, 5%	✓		
Curbscut to pathway from parking lot at each space or pair of spaces, if sidewalk (curb) is present		✓	NO CURB
Curbscut is a minimum width of 3 ft, excluding sloped sides, has sloped sides, all slopes not to exceed 1:12, and textured or painted yellow			
RAMPS N/A			
Specification	Yes	No	Comments/Transition Notes
Slope Maximum 1:12			
Minimum width 4 ft between handrails			
Handrails on both sides if ramp is longer than 6 ft			
Handrails at 34" and 19" from ramp surface			
Handrails extend 12" beyond top and bottom			
Handgrip oval or round			
Handgrip smooth surface			
Handgrip diameter between 1 1/4" and 2"			
Clearance of 1 1/2" between wall and wall rail			
Non-slip surface			
Level platforms (4ft x 4 ft) at every 30 ft, at top, at bottom, at change of direction			

Notes

Raft was placed on top of handicapped parking space, so it was difficult to see an access aisle.

Location

SITE ACCESS, PATH OF TRAVEL, ENTRANCES			
Specification	Yes	No	Comments/Transition Notes
Site Access			
Accessible path of travel from passenger disembarking area and parking area to accessible entrance		✓	curb cut to beach is needed
Disembarking area at accessible entrance		✓	
Surface evenly paved or hard-packed	✓		
No ponding of water	✓		
Path of Travel			
Path does not require the use of stairs		✓	there is a large berm
Path is stable, firm and slip resistant	✓		
3 ft wide minimum		✓	
Slope maximum 1:20 (5%) and maximum cross pitch is 2% (1:50).	✓		
Continuous common surface, no changes in level greater than 1/2 inch			
Any objects protruding onto the pathway must be detected by a person with a visual disability using a cane			
Objects protruding more than 4" from the wall must be within 27" of the ground, or higher than 80"			
Curb on the pathway must have curb cuts at drives, parking and drop-offs			
Entrances N/A			
Primary public entrances accessible to person using wheelchair, must be signed, gotten to independently, and <i>not</i> be the service entrance			
Level space extending 5 ft. from the door, interior and exterior of entrance doors			
Minimum 32" clear width opening (i.e. 36" door with standard hinge)			
At least 18" clear floor area on latch, pull side of door			
Door handle no higher than 48" and operable with a closed fist			
Vestibule is 4 ft plus the width of the door swinging into the space			
Entrance(s) on a level that makes elevators accessible			
Door mats less than 1/2" thick are securely fastened			
Door mats more than 1/2" thick are recessed			
Grates in path of travel have openings of 1/2" maximum			
Signs at non-accessible entrance(s) indicate direction to accessible entrance			
Emergency egress – alarms with flashing lights and audible signals, sufficiently lighted			

Notes

Location

STAIRS and DOORS

N/A

Specification	Yes	No	Comments/Transition Notes
Stairs			
No open risers			
Nosings not projecting			
Treads no less than 11" wide			
Handrails on both sides			
Handrails 34"-38" above tread			
Handrail extends a minimum of 1 ft beyond top and bottom riser (if no safety hazard and space permits)			
Handgrip oval or round			
Handgrip has a smooth surface			
Handgrip diameter between 1¼" and 1½"			
1½" clearance between wall and handrail			
Doors			
Minimum 32" clear opening			
At least 18" clear floor space on pull side of door			
Closing speed minimum 3 seconds to within 3" of the latch			
Maximum pressure 5 pounds interior doors			
Threshold maximum ½" high, beveled on both sides			
Hardware operable with a closed fist (no conventional door knobs or thumb latch devices)			
Hardware minimum 36", maximum 48" above the floor			
Clear, level floor space extends out 5 ft from both sides of the door			
Door adjacent to revolving door is accessible and unlocked			
Doors opening into hazardous area have hardware that is knurled or roughened			

Notes

Location

RESTROOMS – also see Doors and Vestibules N/A			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
5 ft turning space measured 12" from the floor			
At least one Sink:			
Clear floor space of 30" by 48" to allow a forward approach			
Mounted without pedestal or legs, height 34" to top of rim			
Extends at least 22" from the wall			
Open knee space a minimum 19" deep, 30" width, and 27" high			
Cover exposed pipes with insulation			
Faucets operable with closed fist (lever or spring activated handle)			
At least one Stall:			
Accessible to person using wheelchair at 60" wide by 72" deep			
Stall door is 36" wide			
Stall door swings out			
Stall door is self closing			
Stall door has a pull latch			
Lock on stall door is operable with a closed fist, and 32" above the floor			
Coat hook is 54" high			
Toilet			
18" from center to nearest side wall			
42" minimum clear space from center to farthest wall or fixture			
Top of seat 17"-19" above the floor			
Grab Bars			
On back and side wall closest to toilet			
1¼" diameter			
1½" clearance to wall			
Located 30" above and parallel to the floor			
Acid-etched or roughened surface			
42" long			
Fixtures			
Toilet paper dispenser is 24" above floor			
One mirror set a maximum 38" to bottom (if tilted, 42")			
Dispensers (towel, soap, etc) at least one of each a maximum 42" above the floor			

Notes

Location

FLOORS, DRINKING FOUNTAINS, TELEPHONES NIA			
Specification	Yes	No	Comments/Transition Notes
Floors			
Non-slip surface			
Carpeting is high-density, low pile, non-absorbent, stretched taut, securely anchored			
Corridor width minimum is 3 ft			
Objects (signs, ceiling lights, fixtures) can only protrude 4" into the path of travel from a height of 27" to 80" above the floor			
Drinking Fountains			
Spouts no higher than 36" from floor to outlet			
Hand operated push button or level controls			
Spouts located near front with stream of water as parallel to front as possible			
If recessed, recess a minimum 30" width, and no deeper than depth of fountain			
If no clear knee space underneath, clear floor space 30" x 48" to allow parallel approach			
Telephones			
Highest operating part a maximum 54" above the floor			
Access within 12" of phone, 30" high by 30" wide			
Adjustable volume control on headset so identified			
SIGNS, SIGNALS, AND SWITCHES			
Specification	Yes	No	Comments/Transition Notes
Switches, Controls and Signs			
Switches and controls for light, heat, ventilation, windows, fire alarms, thermostats, etc, must be a minimum of 36" and a maximum of 48" above the floor for a forward reach, a maximum of 54" for a side reach			
Electrical outlets centered no lower than 18" above the floor			
Warning signals must be visual as well as audible			
Signs			
Mounting height must be 60" to centerline of the sign			
Within 18" of door jamb or recessed			
Letters and numbers at least 1/4" high			
Letters and numbers raised .03"			
Letters and numbers contrast with the background color			

Notes

Location

SWIMMING POOLS – accessibility can be via ramp, lifting device, or transfer area N/A			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Ramp at least 34" wide with a non-slip surface extending into the shallow end, slope not exceeding 1:6 with handrails on both sides			
Lifting device			
Transfer area 18" above the path of travel and a minimum of 18" wide			
Unobstructed path of travel not less than 48" wide around pool			
Non-slip surface			

Location

SHOWER ROOMS - Showers must accommodate both wheel-in and transfer use N/A			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Stalls 36" by 60" minimum, with a 36" door opening			
Floors are pitched to drain the stall at the corner farthest from entrance			
Floors are non-slip surface			
Controls operate by a single lever with a pressure balance mixing valve			
Controls are located on the center wall adjacent to the hinged seat			
Shower heads attached to a flexible metal hose			
Shower heads attached to wall mounting adjustable from 42" to 72" above the floor			
Seat is hinged and padded and at least 16" deep, folds upward, securely attached to side wall, height is 18" to the top of the seat, and at least 24" long			
Soap trays without handhold features unless they can support 250 pounds			
2 grab bars are provided, one 30" and one 48" long, or one continuous L shaped bar			
Grab bars are placed horizontally at 36" above the floor line			

Location

PICNICKING N/A			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
A minimum of 5% of the total tables must be accessible with clear space under the table top not less than 30" wide and 19" deep per seating space and not less than 27" clear from the ground to the underside of the table. An additional 29" clear space (totaling 48") must extend beyond the 19" clear space under the table to provide access			
For tables without toe clearance, the knee space under the table must be at least 28" high, 30" wide and 24" deep.			
Top of table no higher than 32" above ground			
Surface of the clear ground space under and around the table must be stable, firm and slip-resistant, and evenly graded with a maximum slope of 2% in all directions			
Accessible tables, grills and fire rings must have clear ground space of at least 36" around the perimeter			

Facility Inventory

Location: *Hen Cove Beach*

ACTIVITY	EQUIPMENT	NOTES
Picnic Facilities <i>N/A</i>	Tables & Benches	Located adjacent to accessible paths
		Access to Open Spaces
		Back and Arm Rests
		Adequate number
	Grills	Height of Cooking Surface
	Trash Cans	Located adjacent to accessible paths
Picnic Shelters	Picnic Shelters	Located adjacent to accessible paths
		Located near accessible water fountains, trash can, restroom, parking, etc.
Trails <i>N/A</i>		Surface material
		Dimensions
		Rails
		Signage (for visually impaired)
Swimming Facilities	Pools	Entrance
		Location from accessible parking
		Safety features i.e. warning for visually impaired
	Beaches	Location from accessible path into water <i>no</i>
		Handrails <i>no</i>
		Location from accessible parking <i>no</i>
Shade provided <i>no</i>		
Play Areas (tot lots) <i>N/A</i>	All Play Equipment i.e. swings, slides	Same experience provided to all
	Access Routes	Located adjacent to accessible paths Enough space between equipment for wheelchair
Game Areas: *ballfield *basketball *tennis <i>N/A</i>	Access Routes	Located adjacent to accessible paths Berm cuts onto courts
	Equipment	Height
		Dimensions
Spectator Seating		
Boat Docks <i>N/A</i>	Access Routes	Located adjacent to accessible paths
		Handrails
Fishing Facilities <i>N/A</i>	Access Routes	Located adjacent to accessible paths
		Handrails
	Equipment	Arm Rests
		Bait Shelves
		Handrails
Fish Cleaning Tables		
Programming <i>N/A</i>	Are special programs at your facilities accessible?	Learn-to-Swim
		Guided Hikes
		Interpretive Programs
Services and Technical Assistance <i>N/A</i>		Information available in alternative formats i.e. for visually impaired
		Process to request interpretive services (i.e. sign language interpreter) for meetings

Location:

PARKING			
<i>Total Spaces</i>	<i>Required Accessible Spaces</i>		
Up to 25	1 space		
26-50	2 spaces		
51-75	3 spaces		
76-100	4 spaces		
101-150	5 spaces		
151-200	6 spaces		
201-300	7 spaces		
301-400	8 spaces		
401-500	9 spaces		
<i>Specification for Accessible Spaces</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Accessible space located closest to accessible entrance	✓		
Where spaces cannot be located within 200 ft of accessible entrance, drop-off area is provided within 100 ft.	✓	✓	
Minimum width of 13 ft includes 8 ft space plus 5 ft access aisle	✓		
Van space – minimum of 1 van space for every accessible space, 8 ft wide plus 8 ft aisle. Alternative is to make all accessible spaces 11 ft wide with 5 ft aisle.		✓	
Sign with international symbol of accessibility at each space or pair of spaces	✓		
Sign minimum 5 ft, maximum 8 ft to top of sign	✓		
Surface evenly paved or hard-packed (no cracks)	✓		
Surface slope less than 1:20, 5%	✓		
Curbscut to pathway from parking lot at each space or pair of spaces, if sidewalk (curb) is present	N/A		No curb
Curbscut is a minimum width of 3 ft, excluding sloped sides, has sloped sides, all slopes not to exceed 1:12, and textured or painted yellow			
RAMPS			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Slope Maximum 1:12			
Minimum width 4 ft between handrails			
Handrails on both sides if ramp is longer than 6 ft			
Handrails at 34" and 19" from ramp surface			
Handrails extend 12" beyond top and bottom			
Handgrip oval or round			
Handgrip smooth surface			
Handgrip diameter between 1 1/4" and 2"			
Clearance of 1 1/2" between wall and wall rail			
Non-slip surface			
Level platforms (4ft x 4 ft) at every 30 ft, at top, at bottom, at change of direction			

Notes

Location

SITE ACCESS, PATH OF TRAVEL, ENTRANCES			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Site Access			
Accessible path of travel from passenger disembarking area and parking area to accessible entrance	✓		
Disembarking area at accessible entrance		✓	
Surface evenly paved or hard-packed	✓		
No ponding of water	✓		
Path of Travel			
Path does not require the use of stairs	✓		
Path is stable, firm and slip resistant	✓		Sandy on beach
3 ft wide minimum	✓		
Slope maximum 1:20 (5%) and maximum cross pitch is 2% (1:50).	✓		
Continuous common surface, no changes in level greater than 1/2 inch	✓		Uneven surface on beach
Any objects protruding onto the pathway must be detected by a person with a visual disability using a cane	✓		
Objects protruding more than 4" from the wall must be within 27" of the ground, or higher than 80"	N/A		
Curb on the pathway must have curb cuts at drives, parking and drop-offs			
Entrances N/A			
Primary public entrances accessible to person using wheelchair, must be signed, gotten to independently, and <i>not</i> be the service entrance			
Level space extending 5 ft. from the door, interior and exterior of entrance doors			
Minimum 32" clear width opening (i.e. 36" door with standard hinge)			
At least 18" clear floor area on latch, pull side of door			
Door handle no higher than 48" and operable with a closed fist			
Vestibule is 4 ft plus the width of the door swinging into the space			
Entrance(s) on a level that makes elevators accessible			
Door mats less than 1/2" thick are securely fastened			
Door mats more than 1/2" thick are recessed			
Grates in path of travel have openings of 1/2" maximum			
Signs at non-accessible entrance(s) indicate direction to accessible entrance			
Emergency egress – alarms with flashing lights and audible signals, sufficiently lighted			

Notes

Location

STAIRS and DOORS NIA			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Stairs			
No open risers			
Nosings not projecting			
Treads no less than 11" wide			
Handrails on both sides			
Handrails 34"-38" above tread			
Handrail extends a minimum of 1 ft beyond top and bottom riser (if no safety hazard and space permits)			
Handgrip oval or round			
Handgrip has a smooth surface			
Handgrip diameter between 1¼" and 1½"			
1½" clearance between wall and handrail			
Doors			
Minimum 32" clear opening			
At least 18" clear floor space on pull side of door			
Closing speed minimum 3 seconds to within 3" of the latch			
Maximum pressure 5 pounds interior doors			
Threshold maximum ½" high, beveled on both sides			
Hardware operable with a closed fist (no conventional door knobs or thumb latch devices)			
Hardware minimum 36", maximum 48" above the floor			
Clear, level floor space extends out 5 ft from both sides of the door			
Door adjacent to revolving door is accessible and unlocked			
Doors opening into hazardous area have hardware that is knurled or roughened			

Notes

Location

RESTROOMS – also see Doors and Vestibules

N/A

<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
5 ft turning space measured 12" from the floor			
At least one Sink:			
Clear floor space of 30" by 48" to allow a forward approach			
Mounted without pedestal or legs, height 34" to top of rim			
Extends at least 22" from the wall			
Open knee space a minimum 19" deep, 30" width, and 27" high			
Cover exposed pipes with insulation			
Faucets operable with closed fist (lever or spring activated handle)			
At least one Stall:			
Accessible to person using wheelchair at 60" wide by 72" deep			
Stall door is 36" wide			
Stall door swings out			
Stall door is self closing			
Stall door has a pull latch			
Lock on stall door is operable with a closed fist, and 32" above the floor			
Coat hook is 54" high			
Toilet			
18" from center to nearest side wall			
42" minimum clear space from center to farthest wall or fixture			
Top of seat 17"-19" above the floor			
Grab Bars			
On back and side wall closest to toilet			
1¼" diameter			
1½" clearance to wall			
Located 30" above and parallel to the floor			
Acid-etched or roughened surface			
42" long			
Fixtures			
Toilet paper dispenser is 24" above floor			
One mirror set a maximum 38" to bottom (if tilted, 42")			
Dispensers (towel, soap, etc) at least one of each a maximum 42" above the floor			

Notes

Location

FLOORS, DRINKING FOUNTAINS, TELEPHONES N/A			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Floors			
Non-slip surface			
Carpeting is high-density, low pile, non-absorbent, stretched taut, securely anchored			
Corridor width minimum is 3 ft			
Objects (signs, ceiling lights, fixtures) can only protrude 4" into the path of travel from a height of 27" to 80" above the floor			
Drinking Fountains			
Spouts no higher than 36" from floor to outlet			
Hand operated push button or level controls			
Spouts located near front with stream of water as parallel to front as possible			
If recessed, recess a minimum 30" width, and no deeper than depth of fountain			
If no clear knee space underneath, clear floor space 30" x 48" to allow parallel approach			
Telephones			
Highest operating part a maximum 54" above the floor			
Access within 12" of phone, 30" high by 30" wide			
Adjustable volume control on headset so identified			
SIGNS, SIGNALS, AND SWITCHES			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Switches, Controls and Signs			
Switches and controls for light, heat, ventilation, windows, fire alarms, thermostats, etc, must be a minimum of 36" and a maximum of 48" above the floor for a forward reach, a maximum of 54" for a side reach			
Electrical outlets centered no lower than 18" above the floor			
Warning signals must be visual as well as audible			
Signs			
Mounting height must be 60" to centerline of the sign			
Within 18" of door jamb or recessed			
Letters and numbers at least 1/4" high			
Letters and numbers raised .03"			
Letters and numbers contrast with the background color			

Notes

Location

SWIMMING POOLS – accessibility can be via ramp, lifting device, or transfer area NIA			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Ramp at least 34" wide with a non-slip surface extending into the shallow end, slope not exceeding 1:6 with handrails on both sides			
Lifting device			
Transfer area 18" above the path of travel and a minimum of 18" wide			
Unobstructed path of travel not less than 48" wide around pool			
Non-slip surface			

Location

SHOWER ROOMS - Showers must accommodate both wheel-in and transfer use NIA			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Stalls 36" by 60" minimum, with a 36" door opening			
Floors are pitched to drain the stall at the corner farthest from entrance			
Floors are non-slip surface			
Controls operate by a single lever with a pressure balance mixing valve			
Controls are located on the center wall adjacent to the hinged seat			
Shower heads attached to a flexible metal hose			
Shower heads attached to wall mounting adjustable from 42" to 72" above the floor			
Seat is hinged and padded and at least 16" deep, folds upward, securely attached to side wall, height is 18" to the top of the seat, and at least 24" long			
Soap trays without handhold features unless they can support 250 pounds			
2 grab bars are provided, one 30" and one 48" long, or one continuous L shaped bar			
Grab bars are placed horizontally at 36" above the floor line			

Location

PICNICKING NIA			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
A minimum of 5% of the total tables must be accessible with clear space under the table top not less than 30" wide and 19" deep per seating space and not less than 27" clear from the ground to the underside of the table. An additional 29" clear space (totaling 48") must extend beyond the 19" clear space under the table to provide access			
For tables without toe clearance, the knee space under the table must be at least 28" high, 30" wide and 24" deep.			
Top of table no higher than 32" above ground			
Surface of the clear ground space under and around the table must be stable, firm and slip-resistant, and evenly graded with a maximum slope of 2% in all directions			
Accessible tables, grills and fire rings must have clear ground space of at least 36" around the perimeter			

Facility Inventory

Location: Keith Field, Sagamore

ACTIVITY	EQUIPMENT	NOTES
Picnic Facilities N/A	Tables & Benches	Located adjacent to accessible paths
		Access to Open Spaces
		Back and Arm Rests
		Adequate number
	Grills	Height of Cooking Surface
Trash Cans	Picnic Shelters	Located adjacent to accessible paths
		Located adjacent to accessible paths
		Located near accessible water fountains, trash can, restroom, parking, etc.
Trails N/A		Surface material
		Dimensions
		Rails
		Signage (for visually impaired)
Swimming Facilities N/A	Pools	Entrance
		Location from accessible parking
		Safety features i.e. warning for visually impaired
	Beaches	Location from accessible path into water
		Handrails
Location from accessible parking		
Play Areas (tot lots) N/A	All Play Equipment i.e. swings, slides	Same experience provided to all *
	Access Routes	Located adjacent to accessible paths Enough space between equipment for wheelchair
Game Areas: *ballfield *basketball *tennis	Access Routes	Located adjacent to accessible paths Needs improvement
		Berm cuts onto courts Yes
	Equipment	Height
		Spectator Seating Yes but not accessible
Boat Docks N/A	Access Routes	Located adjacent to accessible paths
		Handrails
Fishing Facilities N/A	Access Routes	Located adjacent to accessible paths
		Handrails
	Equipment	Arm Rests
		Bait Shelves
		Fish Cleaning Tables
Programming N/A	Are special programs at your facilities accessible?	Learn-to-Swim
		Guided Hikes
		Interpretive Programs
Services and Technical Assistance N/A		Information available in alternative formats i.e. for visually impaired
		Process to request interpretive services (i.e. sign language interpreter) for meetings

Handicapped parking and access to ball field / spectator seating is needed

Location:

PARKING			
<i>Total Spaces</i>	<i>Required Accessible Spaces</i> None		
Up to 25	1 space		
26-50	2 spaces		
51-75	3 spaces		
76-100	4 spaces		
101-150	5 spaces		
151-200	6 spaces		
201-300	7 spaces		
301-400	8 spaces		
401-500	9 spaces		
<i>Specification for Accessible Spaces</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Accessible space located closest to accessible entrance		✓	
Where spaces cannot be located within 200 ft of accessible entrance, drop-off area is provided within 100 ft.		✓	
Minimum width of 13 ft includes 8 ft space plus 5 ft access aisle		✓	
Van space – minimum of 1 van space for every accessible space, 8 ft wide plus 8 ft aisle. Alternative is to make all accessible spaces 11 ft wide with 5 ft aisle.		✓	
Sign with international symbol of accessibility at each space or pair of spaces		✓	
Sign minimum 5 ft, maximum 8 ft to top of sign		✓	
Surface evenly paved or hard-packed (no cracks)		✓	
Surface slope less than 1:20, 5%	✓		
Curbscut to pathway from parking lot at each space or pair of spaces, if sidewalk (curb) is present		✓	
Curbscut is a minimum width of 3 ft, excluding sloped sides, has sloped sides, all slopes not to exceed 1:12, and textured or painted yellow			
RAMPS N/A			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Slope Maximum 1:12			
Minimum width 4 ft between handrails			
Handrails on both sides if ramp is longer than 6 ft			
Handrails at 34" and 19" from ramp surface			
Handrails extend 12" beyond top and bottom			
Handgrip oval or round			
Handgrip smooth surface			
Handgrip diameter between 1½" and 2"			
Clearance of 1½" between wall and wall rail			
Non-slip surface			
Level platforms (4ft x 4 ft) at every 30 ft, at top, at bottom, at change of direction			

Notes

Location

SITE ACCESS, PATH OF TRAVEL, ENTRANCES			
Specification	Yes	No	Comments/Transition Notes
Site Access			
Accessible path of travel from passenger disembarking area and parking area to accessible entrance		✓	
Disembarking area at accessible entrance		✓	
Surface evenly paved or hard-packed		✓	
No ponding of water		✓	
Path of Travel			
Path does not require the use of stairs		✓	
Path is stable, firm and slip resistant	✓		
3 ft wide minimum	✓		
Slope maximum 1:20 (5%) and maximum cross pitch is 2% (1:50).	✓		
Continuous common surface, no changes in level greater than ½ inch		✓	
Any objects protruding onto the pathway must be detected by a person with a visual disability using a cane			
Objects protruding more than 4" from the wall must be within 27" of the ground, or higher than 80"			
Curb on the pathway must have curb cuts at drives, parking and drop-offs			
Entrances N/A			
Primary public entrances accessible to person using wheelchair, must be signed, gotten to independently, and <i>not</i> be the service entrance			
Level space extending 5 ft. from the door, interior and exterior of entrance doors			
Minimum 32" clear width opening (i.e. 36" door with standard hinge)			
At least 18" clear floor area on latch, pull side of door			
Door handle no higher than 48" and operable with a closed fist			
Vestibule is 4 ft plus the width of the door swinging into the space			
Entrance(s) on a level that makes elevators accessible			
Door mats less than ½" thick are securely fastened			
Door mats more than ½" thick are recessed			
Grates in path of travel have openings of ½" maximum			
Signs at non-accessible entrance(s) indicate direction to accessible entrance			
Emergency egress – alarms with flashing lights and audible signals, sufficiently lighted			

Notes

Location

STAIRS and DOORS N/A			
Specification	Yes	No	Comments/Transition Notes
Stairs			
No open risers			
Nosings not projecting			
Treads no less than 11" wide			
Handrails on both sides			
Handrails 34"-38" above tread			
Handrail extends a minimum of 1 ft beyond top and bottom riser (if no safety hazard and space permits)			
Handgrip oval or round			
Handgrip has a smooth surface			
Handgrip diameter between 1¼" and 1½"			
1½" clearance between wall and handrail			
Doors			
Minimum 32" clear opening			
At least 18" clear floor space on pull side of door			
Closing speed minimum 3 seconds to within 3" of the latch			
Maximum pressure 5 pounds interior doors			
Threshold maximum ½" high, beveled on both sides			
Hardware operable with a closed fist (no conventional door knobs or thumb latch devices)			
Hardware minimum 36", maximum 48" above the floor			
Clear, level floor space extends out 5 ft from both sides of the door			
Door adjacent to revolving door is accessible and unlocked			
Doors opening into hazardous area have hardware that is knurled or roughened			

Notes

Location

RESTROOMS – also see Doors and Vestibules N/A			
Specification	Yes	No	Comments/Transition Notes
5 ft turning space measured 12" from the floor			
At least one Sink:			
Clear floor space of 30" by 48" to allow a forward approach			
Mounted without pedestal or legs, height 34" to top of rim			
Extends at least 22" from the wall			
Open knee space a minimum 19" deep, 30" width, and 27" high			
Cover exposed pipes with insulation			
Faucets operable with closed fist (lever or spring activated handle)			
At least one Stall:			
Accessible to person using wheelchair at 60" wide by 72" deep			
Stall door is 36" wide			
Stall door swings out			
Stall door is self closing			
Stall door has a pull latch			
Lock on stall door is operable with a closed fist, and 32" above the floor			
Coat hook is 54" high			
Toilet			
18" from center to nearest side wall			
42" minimum clear space from center to farthest wall or fixture			
Top of seat 17"-19" above the floor			
Grab Bars			
On back and side wall closest to toilet			
1 1/4" diameter			
1 1/2" clearance to wall			
Located 30" above and parallel to the floor			
Acid-etched or roughened surface			
42" long			
Fixtures			
Toilet paper dispenser is 24" above floor			
One mirror set a maximum 38" to bottom (if tilted, 42")			
Dispensers (towel, soap, etc) at least one of each a maximum 42" above the floor			

Notes

Restrooms were locked

Location

FLOORS, DRINKING FOUNTAINS, TELEPHONES NA			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Floors			
Non-slip surface			
Carpeting is high-density, low pile, non-absorbent, stretched taut, securely anchored			
Corridor width minimum is 3 ft			
Objects (signs, ceiling lights, fixtures) can only protrude 4" into the path of travel from a height of 27" to 80" above the floor			
Drinking Fountains			
Spouts no higher than 36" from floor to outlet			
Hand operated push button or level controls			
Spouts located near front with stream of water as parallel to front as possible			
If recessed, recess a minimum 30" width, and no deeper than depth of fountain			
If no clear knee space underneath, clear floor space 30" x 48" to allow parallel approach			
Telephones			
Highest operating part a maximum 54" above the floor			
Access within 12" of phone, 30" high by 30" wide			
Adjustable volume control on headset so identified			
SIGNS, SIGNALS, AND SWITCHES			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Switches, Controls and Signs			
Switches and controls for light, heat, ventilation, windows, fire alarms, thermostats, etc, must be a minimum of 36" and a maximum of 48" above the floor for a forward reach, a maximum of 54" for a side reach			
Electrical outlets centered no lower than 18" above the floor			
Warning signals must be visual as well as audible			
Signs			
Mounting height must be 60" to centerline of the sign			
Within 18" of door jamb or recessed			
Letters and numbers at least 1/4" high			
Letters and numbers raised .03"			
Letters and numbers contrast with the background color			

Notes

Location

SWIMMING POOLS – accessibility can be via ramp, lifting device, or transfer area N/A			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Ramp at least 34" wide with a non-slip surface extending into the shallow end, slope not exceeding 1:6 with handrails on both sides			
Lifting device			
Transfer area 18" above the path of travel and a minimum of 18" wide			
Unobstructed path of travel not less than 48" wide around pool			
Non-slip surface			

Location

SHOWER ROOMS - Showers must accommodate both wheel-in and transfer use N/A			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Stalls 36" by 60" minimum, with a 36" door opening			
Floors are pitched to drain the stall at the corner farthest from entrance			
Floors are non-slip surface			
Controls operate by a single lever with a pressure balance mixing valve			
Controls are located on the center wall adjacent to the hinged seat			
Shower heads attached to a flexible metal hose			
Shower heads attached to wall mounting adjustable from 42" to 72" above the floor			
Seat is hinged and padded and at least 16" deep, folds upward, securely attached to side wall, height is 18" to the top of the seat, and at least 24" long			
Soap trays without handhold features unless they can support 250 pounds			
2 grab bars are provided, one 30" and one 48" long, or one continuous L shaped bar			
Grab bars are placed horizontally at 36" above the floor line			

Location

PICNICKING N/A			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
A minimum of 5% of the total tables must be accessible with clear space under the table top not less than 30" wide and 19" deep per seating space and not less than 27" clear from the ground to the underside of the table. An additional 29" clear space (totaling 48") must extend beyond the 19" clear space under the table to provide access			
For tables without toe clearance, the knee space under the table must be at least 28" high, 30" wide and 24" deep.			
Top of table no higher than 32" above ground			
Surface of the clear ground space under and around the table must be stable, firm and slip-resistant, and evenly graded with a maximum slope of 2% in all directions			
Accessible tables, grills and fire rings must have clear ground space of at least 36" around the perimeter			

Facility Inventory

Location:

Monument Beach Marina

ACTIVITY	EQUIPMENT	NOTES
Picnic Facilities	Tables & Benches	Located adjacent to accessible paths <i>Yes</i>
		Access to Open Spaces <i>Yes</i>
		Back and Arm Rests <i>No</i>
		Adequate number <i>Yes</i>
	Grills <i>N/A</i>	Height of Cooking Surface
	Trash Cans <i>N/A</i>	Located adjacent to accessible paths
	Picnic Shelters <i>N/A</i>	Located adjacent to accessible paths
		Located near accessible water fountains, trash can, restroom, parking, etc.
Trails <i>N/A</i>		Surface material
		Dimensions
		Rails
		Signage (for visually impaired)
Swimming Facilities	Pools	Entrance
		Location from accessible parking
		Safety features i.e. warning for visually impaired
	Beaches	Location from accessible path into water <i>No</i>
		Handrails <i>No</i>
		Location from accessible parking <i>No</i>
	Shade provided <i>No</i>	
Play Areas (tot lots) <i>N/A</i>	All Play Equipment i.e. swings, slides	Same experience provided to all
	Access Routes	Located adjacent to accessible paths Enough space between equipment for wheelchair
Game Areas: *ballfield <i>N/A</i> *basketball <i>N/A</i> *tennis <i>N/A</i>	Access Routes	Located adjacent to accessible paths
		Berm cuts onto courts
	Equipment	Height
		Dimensions
Spectator Seating		
Boat Docks	Access Routes	Located adjacent to accessible paths <i>Yes</i>
		Handrails <i>Yes for part of the way</i>
Fishing Facilities	Access Routes	Located adjacent to accessible paths <i>Yes</i>
		Handrails <i>Yes for part of the way</i>
	Equipment	Arm Rests <i>No</i>
		Bait Shelves <i>No</i>
		Handrails <i>No</i>
		Fish Cleaning Tables <i>No</i>
Programming <i>N/A</i>	Are special programs at your facilities accessible?	Learn-to-Swim
		Guided Hikes
		Interpretive Programs
Services and Technical Assistance <i>N/A</i>	Information available in alternative formats i.e. for visually impaired	
	Process to request interpretive services (i.e. sign language interpreter) for meetings	

Location:

PARKING			
Total Spaces	Required Accessible Spaces		
Up to 25	1 space		
26-50	2 spaces		
51-75	3 spaces		
76-100	4 spaces		
101-150	5 spaces		
151-200	6 spaces		
201-300	7 spaces		
301-400	8 spaces		
401-500	9 spaces		
Specification for Accessible Spaces	Yes	No	Comments/Transition Notes
Accessible space located closest to accessible entrance	✓		Yes for two. Recommend moving other two spaces closer
Where spaces cannot be located within 200 ft of accessible entrance, drop-off area is provided within 100 ft.	✓		
Minimum width of 13 ft includes 8 ft space plus 5 ft access aisle	-	✓	
Van space – minimum of 1 van space for every accessible space, 8 ft wide plus 8 ft aisle. Alternative is to make all accessible spaces 11 ft wide with 5 ft aisle.		✓	
Sign with international symbol of accessibility at each space or pair of spaces	✓		
Sign minimum 5 ft, maximum 8 ft to top of sign	✓		
Surface evenly paved or hard-packed (no cracks)	✓		
Surface slope less than 1:20, 5%	✓		
Curbscut to pathway from parking lot at each space or pair of spaces, if sidewalk (curb) is present	N/A		no curb
Curbscut is a minimum width of 3 ft, excluding sloped sides, has sloped sides, all slopes not to exceed 1:12, and textured or painted yellow	N/A		
RAMPS			
Specification	Yes	No	Comments/Transition Notes
Slope Maximum 1:12			
Minimum width 4 ft between handrails			
Handrails on both sides if ramp is longer than 6 ft			
Handrails at 34" and 19" from ramp surface			
Handrails extend 12" beyond top and bottom			
Handgrip oval or round			
Handgrip smooth surface			
Handgrip diameter between 1 1/4" and 2"			
Clearance of 1 1/2" between wall and wall rail			
Non-slip surface			
Level platforms (4ft x 4 ft) at every 30 ft, at top, at bottom, at change of direction			

Notes

Location

SITE ACCESS, PATH OF TRAVEL, ENTRANCES			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Site Access			
Accessible path of travel from passenger disembarking area and parking area to accessible entrance	✓		
Disembarking area at accessible entrance	✓		
Surface evenly paved or hard-packed	✓		
No ponding of water	✓		
Path of Travel			
Path does not require the use of stairs	✓		
Path is stable, firm and slip resistant	✓		
3 ft wide minimum	✓		
Slope maximum 1:20 (5%) and maximum cross pitch is 2% (1:50).	✓		
Continuous common surface, no changes in level greater than 1/2 inch	✓		
Any objects protruding onto the pathway must be detected by a person with a visual disability using a cane	✓		
Objects protruding more than 4" from the wall must be within 27" of the ground, or higher than 80"	✓		
Curb on the pathway must have curb cuts at drives, parking and drop-offs			N/A
Entrances			
Primary public entrances accessible to person using wheelchair, must be signed, gotten to independently, and <i>not</i> be the service entrance			N/A
Level space extending 5 ft. from the door, interior and exterior of entrance doors			
Minimum 32" clear width opening (i.e. 36" door with standard hinge)			
At least 18" clear floor area on latch, pull side of door			
Door handle no higher than 48" and operable with a closed fist			
Vestibule is 4 ft plus the width of the door swinging into the space			
Entrance(s) on a level that makes elevators accessible			
Door mats less than 1/2" thick are securely fastened			
Door mats more than 1/2" thick are recessed			
Grates in path of travel have openings of 1/2" maximum			
Signs at non-accessible entrance(s) indicate direction to accessible entrance			
Emergency egress – alarms with flashing lights and audible signals, sufficiently lighted			

Notes

Location

N/A

STAIRS and DOORS			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Stairs			
No open risers			
Nosings not projecting			
Treads no less than 11" wide			
Handrails on both sides			
Handrails 34"-38" above tread			
Handrail extends a minimum of 1 ft beyond top and bottom riser (if no safety hazard and space permits)			
Handgrip oval or round			
Handgrip has a smooth surface			
Handgrip diameter between 1 1/4" and 1 1/2"			
1 1/2" clearance between wall and handrail			
Doors			
Minimum 32" clear opening			
At least 18" clear floor space on pull side of door			
Closing speed minimum 3 seconds to within 3" of the latch			
Maximum pressure 5 pounds interior doors			
Threshold maximum 1/2" high, beveled on both sides			
Hardware operable with a closed fist (no conventional door knobs or thumb latch devices)			
Hardware minimum 36", maximum 48" above the floor			
Clear, level floor space extends out 5 ft from both sides of the door			
Door adjacent to revolving door is accessible and unlocked			
Doors opening into hazardous area have hardware that is knurled or roughened			

Notes

Location

RESTROOMS – also see Doors and Vestibules			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
5 ft turning space measured 12" from the floor			
At least one Sink:			
Clear floor space of 30" by 48" to allow a forward approach			
Mounted without pedestal or legs, height 34" to top of rim			
Extends at least 22" from the wall			
Open knee space a minimum 19" deep, 30" width, and 27" high			
Cover exposed pipes with insulation			
Faucets operable with closed fist (lever or spring activated handle)			
At least one Stall:			
Accessible to person using wheelchair at 60" wide by 72" deep			
Stall door is 36" wide			
Stall door swings out			
Stall door is self closing			
Stall door has a pull latch			
Lock on stall door is operable with a closed fist, and 32" above the floor			
Coat hook is 54" high			
Toilet			
18" from center to nearest side wall			
42" minimum clear space from center to farthest wall or fixture			
Top of seat 17"-19" above the floor			
Grab Bars			
On back and side wall closest to toilet			
1 1/4" diameter			
1 1/2" clearance to wall			
Located 30" above and parallel to the floor			
Acid-etched or roughened surface			
42" long			
Fixtures			
Toilet paper dispenser is 24" above floor			
One mirror set a maximum 38" to bottom (if tilted, 42")			
Dispensers (towel, soap, etc) at least one of each a maximum 42" above the floor			

Notes

Restrooms were closed at time of visit

Location

FLOORS, DRINKING FOUNTAINS, TELEPHONES N/A			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Floors			
Non-slip surface			
Carpeting is high-density, low pile, non-absorbent, stretched taut, securely anchored			
Corridor width minimum is 3 ft			
Objects (signs, ceiling lights, fixtures) can only protrude 4" into the path of travel from a height of 27" to 80" above the floor			
Drinking Fountains			
Spouts no higher than 36" from floor to outlet			
Hand operated push button or level controls			
Spouts located near front with stream of water as parallel to front as possible			
If recessed, recess a minimum 30" width, and no deeper than depth of fountain			
If no clear knee space underneath, clear floor space 30" x 48" to allow parallel approach			
Telephones			
Highest operating part a maximum 54" above the floor			
Access within 12" of phone, 30" high by 30" wide			
Adjustable volume control on headset so identified			
SIGNS, SIGNALS, AND SWITCHES			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Switches, Controls and Signs			
Switches and controls for light, heat, ventilation, windows, fire alarms, thermostats, etc, must be a minimum of 36" and a maximum of 48" above the floor for a forward reach, a maximum of 54" for a side reach			
Electrical outlets centered no lower than 18" above the floor			
Warning signals must be visual as well as audible			
Signs			
Mounting height must be 60" to centerline of the sign			
Within 18" of door jamb or recessed			
Letters and numbers a't least 1¼" high			
Letters and numbers raised .03"			
Letters and numbers contrast with the background color			

Notes

Location

SWIMMING POOLS – accessibility can be via ramp, lifting device, or transfer area NIA			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Ramp at least 34" wide with a non-slip surface extending into the shallow end, slope not exceeding 1:6 with handrails on both sides			
Lifting device			
Transfer area 18" above the path of travel and a minimum of 18" wide			
Unobstructed path of travel not less than 48" wide around pool			
Non-slip surface			

Location

SHOWER ROOMS - Showers must accommodate both wheel-in and transfer use NIA			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Stalls 36" by 60" minimum, with a 36" door opening			
Floors are pitched to drain the stall at the corner farthest from entrance			
Floors are non-slip surface			
Controls operate by a single lever with a pressure balance mixing valve			
Controls are located on the center wall adjacent to the hinged seat			
Shower heads attached to a flexible metal hose			
Shower heads attached to wall mounting adjustable from 42" to 72" above the floor			
Seat is hinged and padded and at least 16" deep, folds upward, securely attached to side wall, height is 18" to the top of the seat, and at least 24" long			
Soap trays without handhold features unless they can support 250 pounds			
2 grab bars are provided, one 30" and one 48" long, or one continuous L shaped bar			
Grab bars are placed horizontally at 36" above the floor line			

Location

PICNICKING			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
A minimum of 5% of the total tables must be accessible with clear space under the table top not less than 30" wide and 19" deep per seating space and not less than 27" clear from the ground to the underside of the table. An additional 29" clear space (totaling 48") must extend beyond the 19" clear space under the table to provide access		✓	
For tables without toe clearance, the knee space under the table must be at least 28" high, 30" wide and 24" deep.		✓	
Top of table no higher than 32" above ground	✓		
Surface of the clear ground space under and around the table must be stable, firm and slip-resistant, and evenly graded with a maximum slope of 2% in all directions	✓		
Accessible tables, grills and fire rings must have clear ground space of at least 36" around the perimeter NIA			

Facility Inventory

Location:

Barlows Landing Beach

ACTIVITY	EQUIPMENT	NOTES
Picnic Facilities	Tables & Benches	Located adjacent to accessible paths no
		Access to Open Spaces yes
		Back and Arm Rests no
		Adequate number no
	Grills NIA	Height of Cooking Surface
	Trash Cans NIA	Located adjacent to accessible paths
	Picnic Shelters NIA	Located adjacent to accessible paths
Trails NIA		Located near accessible water fountains, trash can, restroom, parking, etc.
		Surface material
		Dimensions
		Rails
Swimming Facilities	Pools	Signage (for visually impaired)
		Entrance
		Location from accessible parking
	Beaches	Safety features i.e. warning for visually impaired
		Location from accessible path into water no
		Handrails no
		Location from accessible parking no
	Shade provided no	
Play Areas (tot lots) NIA	All Play Equipment i.e. swings, slides	Same experience provided to all
	Access Routes	Located adjacent to accessible paths Enough space between equipment for wheelchair
Game Areas: *ballfield *basketball *tennis NIA	Access Routes	Located adjacent to accessible paths Berm cuts onto courts
	Equipment	Height
		Dimensions
Spectator Seating		
Boat Docks NIA	Access Routes	Located adjacent to accessible paths yes
		Handrails no
Fishing Facilities NIA	Access Routes	Located adjacent to accessible paths
		Handrails
	Equipment	Arm Rests no
		Bait Shelves no
		Handrails
Programming NIA	Are special programs at your facilities accessible?	Fish Cleaning Tables
		Learn-to-Swim
		Guided Hikes
Services and Technical Assistance NIA		Interpretive Programs
		Information available in alternative formats i.e. for visually impaired
		Process to request interpretive services (i.e. sign language interpreter) for meetings

Recommend to build accessible path to benches / picnic area

Location:

PARKING			
<i>Total Spaces</i>	<i>Required Accessible Spaces</i>		
Up to 25	1 space		
26-50	2 spaces		
51-75	3 spaces		
76-100	4 spaces		
101-150	5 spaces		
151-200	6 spaces		
201-300	7 spaces		
301-400	8 spaces		
401-500	9 spaces		
<i>Specification for Accessible Spaces</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Accessible space located closest to accessible entrance	✓		Close to docks no designated drop off location
Where spaces cannot be located within 200 ft of accessible entrance, drop-off area is provided within 100 ft.		✓	
Minimum width of 13 ft includes 8 ft space plus 5 ft access aisle	✓		
Van space – minimum of 1 van space for every accessible space, 8 ft wide plus 8 ft aisle. Alternative is to make all accessible spaces 11 ft wide with 5 ft aisle.		✓	
Sign with international symbol of accessibility at each space or pair of spaces	✓		
Sign minimum 5 ft, maximum 8 ft to top of sign	✓		
Surface evenly paved or hard-packed (no cracks)	✓		
Surface slope less than 1:20, 5%	✓		
Curbscut to pathway from parking lot at each space or pair of spaces, if sidewalk (curb) is present			no curb
Curbscut is a minimum width of 3 ft, excluding sloped sides, has sloped sides, all slopes not to exceed 1:12, and textured or painted yellow			
RAMPS			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Slope Maximum 1:12			
Minimum width 4 ft between handrails			
Handrails on both sides if ramp is longer than 6 ft			
Handrails at 34" and 19" from ramp surface			
Handrails extend 12" beyond top and bottom			
Handgrip oval or round			
Handgrip smooth surface			
Handgrip diameter between 1 1/4" and 2"			
Clearance of 1 1/2" between wall and wall rail			
Non-slip surface			
Level platforms (4ft x 4 ft) at every 30 ft, at top, at bottom, at change of direction			

Notes

Location

SITE ACCESS, PATH OF TRAVEL, ENTRANCES			
<i>Specification</i>	Yes	No	<i>Comments/Transition Notes</i>
Site Access			
Accessible path of travel from passenger disembarking area and parking area to accessible entrance	✓		
Disembarking area at accessible entrance		✓	
Surface evenly paved or hard-packed	✓		
No ponding of water	✓		
Path of Travel			
Path does not require the use of stairs	✓		Path to beach has a step Path to beach is uneven
Path is stable, firm and slip resistant	✓		
3 ft wide minimum	✓		
Slope maximum 1:20 (5%) and maximum cross pitch is 2% (1:50).	✓		
Continuous common surface, no changes in level greater than 1/2 inch	✓		
Any objects protruding onto the pathway must be detected by a person with a visual disability using a cane	✓		
Objects protruding more than 4" from the wall must be within 27" of the ground, or higher than 80"	N/A		
Curb on the pathway must have curb cuts at drives, parking and drop-offs			
Entrances N/A			
Primary public entrances accessible to person using wheelchair, must be signed, gotten to independently, and <i>not</i> be the service entrance			
Level space extending 5 ft. from the door, interior and exterior of entrance doors			
Minimum 32" clear width opening (i.e. 36" door with standard hinge)			
At least 18" clear floor area on latch, pull side of door			
Door handle no higher than 48" and operable with a closed fist			
Vestibule is 4 ft plus the width of the door swinging into the space			
Entrance(s) on a level that makes elevators accessible			
Door mats less than 1/2" thick are securely fastened			
Door mats more than 1/2" thick are recessed			
Grates in path of travel have openings of 1/2" maximum			
Signs at non-accessible entrance(s) indicate direction to accessible entrance			
Emergency egress – alarms with flashing lights and audible signals, sufficiently lighted			

Notes

Location

STAIRS and DOORS N/A			
Specification	Yes	No	Comments/Transition Notes
Stairs			
No open risers			
Nosings not projecting			
Treads no less than 11" wide			
Handrails on both sides			
Handrails 34"-38" above tread			
Handrail extends a minimum of 1 ft beyond top and bottom riser (if no safety hazard and space permits)			
Handgrip oval or round			
Handgrip has a smooth surface			
Handgrip diameter between 1 1/4" and 1 1/2"			
1 1/2" clearance between wall and handrail			
Doors			
Minimum 32" clear opening			
At least 18" clear floor space on pull side of door			
Closing speed minimum 3 seconds to within 3" of the latch			
Maximum pressure 5 pounds interior doors			
Threshold maximum 1/2" high, beveled on both sides			
Hardware operable with a closed fist (no conventional door knobs or thumb latch devices)			
Hardware minimum 36", maximum 48" above the floor			
Clear, level floor space extends out 5 ft from both sides of the door			
Door adjacent to revolving door is accessible and unlocked			
Doors opening into hazardous area have hardware that is knurled or roughened			

Notes

Location

RESTROOMS – also see Doors and Vestibules N/A			
<i>Specification</i>	Yes	No	<i>Comments/Transition Notes</i>
5 ft turning space measured 12" from the floor			
At least one Sink:			
Clear floor space of 30" by 48" to allow a forward approach			
Mounted without pedestal or legs, height 34" to top of rim			
Extends at least 22" from the wall			
Open knee space a minimum 19" deep, 30" width, and 27" high			
Cover exposed pipes with insulation			
Faucets operable with closed fist (lever or spring activated handle)			
At least one Stall:			
Accessible to person using wheelchair at 60" wide by 72" deep			
Stall door is 36" wide			
Stall door swings out			
Stall door is self closing			
Stall door has a pull latch			
Lock on stall door is operable with a closed fist, and 32" above the floor			
Coat hook is 54" high			
Toilet			
18" from center to nearest side wall			
42" minimum clear space from center to farthest wall or fixture			
Top of seat 17"-19" above the floor			
Grab Bars			
On back and side wall closest to toilet			
1½" diameter			
1½" clearance to wall			
Located 30" above and parallel to the floor			
Acid-etched or roughened surface			
42" long			
Fixtures			
Toilet paper dispenser is 24" above floor			
One mirror set a maximum 38" to bottom (if tilted, 42")			
Dispensers (towel, soap, etc) at least one of each a maximum 42" above the floor			

Notes

Location

FLOORS, DRINKING FOUNTAINS, TELEPHONES N/A			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Floors			
Non-slip surface			
Carpeting is high-density, low pile, non-absorbent, stretched taut, securely anchored			
Corridor width minimum is 3 ft			
Objects (signs, ceiling lights, fixtures) can only protrude 4" into the path of travel from a height of 27" to 80" above the floor			
Drinking Fountains			
Spouts no higher than 36" from floor to outlet			
Hand operated push button or level controls			
Spouts located near front with stream of water as parallel to front as possible			
If recessed, recess a minimum 30" width, and no deeper than depth of fountain			
If no clear knee space underneath, clear floor space 30" x 48" to allow parallel approach			
Telephones			
Highest operating part a maximum 54" above the floor			
Access within 12" of phone, 30" high by 30" wide			
Adjustable volume control on headset so identified			
SIGNS, SIGNALS, AND SWITCHES			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Switches, Controls and Signs			
Switches and controls for light, heat, ventilation, windows, fire alarms, thermostats, etc, must be a minimum of 36" and a maximum of 48" above the floor for a forward reach, a maximum of 54" for a side reach			
Electrical outlets centered no lower than 18" above the floor			
Warning signals must be visual as well as audible			
Signs			
Mounting height must be 60" to centerline of the sign			
Within 18" of door jamb or recessed			
Letters and numbers a t least 1¼" high			
Letters and numbers raised .03"			
Letters and numbers contrast with the background color			

Notes

Location

SWIMMING POOLS – accessibility can be via ramp, lifting device, or transfer area N/A			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Ramp at least 34" wide with a non-slip surface extending into the shallow end, slope not exceeding 1:6 with handrails on both sides			
Lifting device			
Transfer area 18" above the path of travel and a minimum of 18" wide			
Unobstructed path of travel not less than 48" wide around pool			
Non-slip surface			

Location

SHOWER ROOMS - Showers must accommodate both wheel-in and transfer use N/A			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Stalls 36" by 60" minimum, with a 36" door opening			
Floors are pitched to drain the stall at the corner farthest from entrance			
Floors are non-slip surface			
Controls operate by a single lever with a pressure balance mixing valve			
Controls are located on the center wall adjacent to the hinged seat			
Shower heads attached to a flexible metal hose			
Shower heads attached to wall mounting adjustable from 42" to 72" above the floor			
Seat is hinged and padded and at least 16" deep, folds upward, securely attached to side wall, height is 18" to the top of the seat, and at least 24" long			
Soap trays without handhold features unless they can support 250 pounds			
2 grab bars are provided, one 30" and one 48" long, or one continuous L shaped bar			
Grab bars are placed horizontally at 36" above the floor line			

Location

PICNICKING XXX			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
A minimum of 5% of the total tables must be accessible with clear space under the table top not less than 30" wide and 19" deep per seating space and not less than 27" clear from the ground to the underside of the table. An additional 29" clear space (totaling 48") must extend beyond the 19" clear space under the table to provide access		✓	
For tables without toe clearance, the knee space under the table must be at least 28" high, 30" wide and 24" deep.	✓		
Top of table no higher than 32" above ground		✓	
Surface of the clear ground space under and around the table must be stable, firm and slip-resistant, and evenly graded with a maximum slope of 2% in all directions		✓	
Accessible tables, grills and fire rings must have clear ground space of at least 36" around the perimeter			N/A

Picture Lake Access

Location: Olake Park

Facility Inventory

ACTIVITY	EQUIPMENT	NOTES
Picnic Facilities <i>NIA</i>	Tables & Benches	Located adjacent to accessible paths
		Access to Open Spaces
		Back and Arm Rests
		Adequate number
	Grills	Height of Cooking Surface Located adjacent to accessible paths
	Trash Cans	Located adjacent to accessible paths
	Picnic Shelters	Located adjacent to accessible paths
		Located near accessible water fountains, trash can, restroom, parking, etc.
Trails <i>NIA</i>		Surface material
		Dimensions
		Rails
		Signage (for visually impaired)
Swimming Facilities	Pools	Entrance
		Location from accessible parking
		Safety features i.e. warning for visually impaired
	Beaches	Location from accessible path into water <i>No</i>
		Handrails <i>No</i>
		Location from accessible parking <i>No</i>
		Shade provided <i>No</i>
Play Areas (tot lots) <i>NIA</i>	All Play Equipment i.e. swings, slides	Same experience provided to all
	Access Routes	Located adjacent to accessible paths
		Enough space between equipment for wheelchair
Game Areas: *ballfield *basketball *tennis <i>NIA</i>	Access Routes	Located adjacent to accessible paths
		Berm cuts onto courts
	Equipment	Height
		Dimensions
Boat Docks <i>NIA</i>	Access Routes	Located adjacent to accessible paths
		Handrails
Fishing Facilities <i>NIA</i>	Access Routes	Located adjacent to accessible paths
		Handrails
	Equipment	Arm Rests
		Bait Shelves
		Handrails
		Fish Cleaning Tables
Programming <i>NIA</i>	Are special programs at your facilities accessible?	Learn-to-Swim
		Guided Hikes
		Interpretive Programs
Services and Technical Assistance <i>NIA</i>		Information available in alternative formats i.e. for visually impaired
		Process to request interpretive services (i.e. sign language interpreter) for meetings

Location:

There is no parking lot
name

PARKING			
<i>Total Spaces</i>	<i>Required Accessible Spaces</i>		
Up to 25	1 space		
26-50	2 spaces		
51-75	3 spaces		
76-100	4 spaces		
101-150	5 spaces		
151-200	6 spaces		
201-300	7 spaces		
301-400	8 spaces		
401-500	9 spaces		
<i>Specification for Accessible Spaces</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Accessible space located closest to accessible entrance			
Where spaces cannot be located within 200 ft of accessible entrance, drop-off area is provided within 100 ft.			
Minimum width of 13 ft includes 8 ft space plus 5 ft access aisle			
Van space – minimum of 1 van space for every accessible space, 8 ft wide plus 8 ft aisle. Alternative is to make all accessible spaces 11 ft wide with 5 ft aisle.			
Sign with international symbol of accessibility at each space or pair of spaces			
Sign minimum 5 ft, maximum 8 ft to top of sign			
Surface evenly paved or hard-packed (no cracks)			
Surface slope less than 1:20, 5%			
Curbside to pathway from parking lot at each space or pair of spaces, if sidewalk (curb) is present			
Curbside is a minimum width of 3 ft, excluding sloped sides, has sloped sides, all slopes not to exceed 1:12, and textured or painted yellow			
RAMPS			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Slope Maximum 1:12			
Minimum width 4 ft between handrails			
Handrails on both sides if ramp is longer than 6 ft			
Handrails at 34" and 19" from ramp surface			
Handrails extend 12" beyond top and bottom			
Handgrip oval or round			
Handgrip smooth surface			
Handgrip diameter between 1½" and 2"			
Clearance of 1½" between wall and wall rail			
Non-slip surface			
Level platforms (4ft x 4 ft) at every 30 ft, at top, at bottom, at change of direction			

Notes

Location

SITE ACCESS, PATH OF TRAVEL, ENTRANCES			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Site Access			
Accessible path of travel from passenger disembarking area and parking area to accessible entrance		X	
Disembarking area at accessible entrance		X	
Surface evenly paved or hard-packed		X	
No ponding of water	X		
Path of Travel			
Path does not require the use of stairs	X		
Path is stable, firm and slip resistant	X		
3 ft wide minimum	X		
Slope maximum 1:20 (5%) and maximum cross pitch is 2% (1:50).	X		
Continuous common surface, no changes in level greater than ½ inch		X	
Any objects protruding onto the pathway must be detected by a person with a visual disability using a cane	X		
Objects protruding more than 4" from the wall must be within 27" of the ground, or higher than 80"	X		
Curb on the pathway must have curb cuts at drives, parking and drop-offs	X		
Entrances			
Primary public entrances accessible to person using wheelchair, must be signed, gotten to independently, and <i>not</i> be the service entrance			
Level space extending 5 ft. from the door, interior and exterior of entrance doors			
Minimum 32" clear width opening (i.e. 36" door with standard hinge)			
At least 18" clear floor area on latch, pull side of door			
Door handle no higher than 48" and operable with a closed fist			
Vestibule is 4 ft plus the width of the door swinging into the space			
Entrance(s) on a level that makes elevators accessible			
Door mats less than ½" thick are securely fastened			
Door mats more than ½" thick are recessed			
Grates in path of travel have openings of ½" maximum			
Signs at non-accessible entrance(s) indicate direction to accessible entrance			
Emergency egress – alarms with flashing lights and audible signals, sufficiently lighted			

Notes

Location

STAIRS and DOORS N/A			
Specification	Yes	No	Comments/Transition Notes
Stairs			
No open risers			
Nosings not projecting			
Treads no less than 11" wide			
Handrails on both sides			
Handrails 34"-38" above tread			
Handrail extends a minimum of 1 ft beyond top and bottom riser (if no safety hazard and space permits)			
Handgrip oval or round			
Handgrip has a smooth surface			
Handgrip diameter between 1¼" and 1½"			
1½" clearance between wall and handrail			
Doors			
Minimum 32" clear opening			
At least 18" clear floor space on pull side of door			
Closing speed minimum 3 seconds to within 3" of the latch			
Maximum pressure 5 pounds interior doors			
Threshold maximum ½" high, beveled on both sides			
Hardware operable with a closed fist (no conventional door knobs or thumb latch devices)			
Hardware minimum 36", maximum 48" above the floor			
Clear, level floor space extends out 5 ft from both sides of the door			
Door adjacent to revolving door is accessible and unlocked			
Doors opening into hazardous area have hardware that is knurled or roughened			

Notes

Location

RESTROOMS – also see Doors and Vestibules N/A			
Specification	Yes	No	Comments/Transition Notes
5 ft turning space measured 12" from the floor			
At least one Sink:			
Clear floor space of 30" by 48" to allow a forward approach			
Mounted without pedestal or legs, height 34" to top of rim			
Extends at least 22" from the wall			
Open knee space a minimum 19" deep, 30" width, and 27" high			
Cover exposed pipes with insulation			
Faucets operable with closed fist (lever or spring activated handle)			
At least one Stall:			
Accessible to person using wheelchair at 60" wide by 72" deep			
Stall door is 36" wide			
Stall door swings out			
Stall door is self closing			
Stall door has a pull latch			
Lock on stall door is operable with a closed fist, and 32" above the floor			
Coat hook is 54" high			
Toilet			
18" from center to nearest side wall			
42" minimum clear space from center to farthest wall or fixture			
Top of seat 17"-19" above the floor			
Grab Bars			
On back and side wall closest to toilet			
1½" diameter			
1½" clearance to wall			
Located 30" above and parallel to the floor			
Acid-etched or roughened surface			
42" long			
Fixtures			
Toilet paper dispenser is 24" above floor			
One mirror set a maximum 38" to bottom (if tilted, 42")			
Dispensers (towel, soap, etc) at least one of each a maximum 42" above the floor			

Notes

Location

FLOORS, DRINKING FOUNTAINS, TELEPHONES N/A			
Specification	Yes	No	Comments/Transition Notes
Floors			
Non-slip surface			
Carpeting is high-density, low pile, non-absorbent, stretched taut, securely anchored			
Corridor width minimum is 3 ft			
Objects (signs, ceiling lights, fixtures) can only protrude 4" into the path of travel from a height of 27" to 80" above the floor			
Drinking Fountains			
Spouts no higher than 36" from floor to outlet			
Hand operated push button or level controls			
Spouts located near front with stream of water as parallel to front as possible			
If recessed, recess a minimum 30" width, and no deeper than depth of fountain			
If no clear knee space underneath, clear floor space 30" x 48" to allow parallel approach			
Telephones			
Highest operating part a maximum 54" above the floor			
Access within 12" of phone, 30" high by 30" wide			
Adjustable volume control on headset so identified			
SIGNS, SIGNALS, AND SWITCHES			
Specification	Yes	No	Comments/Transition Notes
Switches, Controls and Signs			
Switches and controls for light, heat, ventilation, windows, fire alarms, thermostats, etc, must be a minimum of 36" and a maximum of 48" above the floor for a forward reach, a maximum of 54" for a side reach			
Electrical outlets centered no lower than 18" above the floor			
Warning signals must be visual as well as audible			
Signs			
Mounting height must be 60" to centerline of the sign			
Within 18" of door jamb or recessed			
Letters and numbers at least 1/4" high			
Letters and numbers raised .03"			
Letters and numbers contrast with the background color			

Notes

Location N/A

SWIMMING POOLS – accessibility can be via ramp, lifting device, or transfer area			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Ramp at least 34" wide with a non-slip surface extending into the shallow end, slope not exceeding 1:6 with handrails on both sides			
Lifting device			
Transfer area 18" above the path of travel and a minimum of 18" wide			
Unobstructed path of travel not less than 48" wide around pool			
Non-slip surface			

Location N/A

SHOWER ROOMS - Showers must accommodate both wheel-in and transfer use			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Stalls 36" by 60" minimum, with a 36" door opening			
Floors are pitched to drain the stall at the corner farthest from entrance			
Floors are non-slip surface			
Controls operate by a single lever with a pressure balance mixing valve			
Controls are located on the center wall adjacent to the hinged seat			
Shower heads attached to a flexible metal hose			
Shower heads attached to wall mounting adjustable from 42" to 72" above the floor			
Seat is hinged and padded and at least 16" deep, folds upward, securely attached to side wall, height is 18" to the top of the seat, and at least 24" long			
Soap trays without handhold features unless they can support 250 pounds			
2 grab bars are provided, one 30" and one 48" long, or one continuous L shaped bar			
Grab bars are placed horizontally at 36" above the floor line			

Location N/A

PICNICKING			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
A minimum of 5% of the total tables must be accessible with clear space under the table top not less than 30" wide and 19" deep per seating space and not less than 27" clear from the ground to the underside of the table. An additional 29" clear space (totaling 48") must extend beyond the 19" clear space under the table to provide access			
For tables without toe clearance, the knee space under the table must be at least 28" high, 30" wide and 24" deep.			
Top of table no higher than 32" above ground			
Surface of the clear ground space under and around the table must be stable, firm and slip-resistant, and evenly graded with a maximum slope of 2% in all directions			
Accessible tables, grills and fire rings must have clear ground space of at least 36" around the perimeter			

Facility Inventory

Location:

Post Office Playground - Washington Park

ACTIVITY	EQUIPMENT	NOTES
Picnic Facilities	Tables & Benches	Located adjacent to accessible paths no
		Access to Open Spaces yes
		Back and Arm Rests back-yes
		Adequate number yes
	Grills N/A	Height of Cooking Surface
	Trash Cans N/A	Located adjacent to accessible paths
		Located adjacent to accessible paths
Picnic Shelters N/A	Located adjacent to accessible paths	
	Located near accessible water fountains, trash can, restroom, parking, etc.	
Trails N/A		Surface material
		Dimensions
		Rails
		Signage (for visually impaired)
Swimming Facilities N/A	Pools	Entrance
		Location from accessible parking
		Safety features i.e. warning for visually impaired
	Beaches	Location from accessible path into water
		Handrails
		Location from accessible parking
		Shade provided
Play Areas (tot lots)	All Play Equipment i.e. swings, slides	Same experience provided to all no
	Access Routes	Located adjacent to accessible paths no
		Enough space between equipment for wheelchair yes
Game Areas: *ballfield *basketball *tennis N/A	Access Routes	Located adjacent to accessible paths
		Berm cuts onto courts
	Equipment	Height
		Dimensions
		Spectator Seating
Boat Docks N/A	Access Routes	Located adjacent to accessible paths
		Handrails
Fishing Facilities N/A	Access Routes	Located adjacent to accessible paths
		Handrails
	Equipment	Arm Rests
		Bait Shelves
		Handrails
Programming N/A	Are special programs at your facilities accessible?	Learn-to-Swim
		Guided Hikes
		Interpretive Programs
Services and Technical Assistance N/A		Information available in alternative formats i.e. for visually impaired
		Process to request interpretive services (i.e. sign language interpreter) for meetings

Improve access to play area

Designate handicap space

Location:

PARKING			
Total Spaces	Required Accessible Spaces		
Up to 25	1 space		
26-50	2 spaces		
51-75	3 spaces		
76-100	4 spaces		
101-150	5 spaces		
151-200	6 spaces		
201-300	7 spaces		
301-400	8 spaces		
401-500	9 spaces		
Specification for Accessible Spaces	Yes	No	Comments/Transition Notes
Accessible space located closest to accessible entrance		✓	Close to post office
Where spaces cannot be located within 200 ft of accessible entrance, drop-off area is provided within 100 ft.		✓	
Minimum width of 13 ft includes 8 ft space plus 5 ft access aisle		✓	
Van space – minimum of 1 van space for every accessible space, 8 ft wide plus 8 ft aisle. Alternative is to make all accessible spaces 11 ft wide with 5 ft aisle.		✓	
Sign with international symbol of accessibility at each space or pair of spaces	✓		
Sign minimum 5 ft, maximum 8 ft to top of sign	✓		
Surface evenly paved or hard-packed (no cracks)	✓		
Surface slope less than 1:20, 5%		✓	There is a slope throughout the parking lot
Curbscut to pathway from parking lot at each space or pair of spaces, if sidewalk (curb) is present			
Curbscut is a minimum width of 3 ft, excluding sloped sides, has sloped sides, all slopes not to exceed 1:12, and textured or painted yellow			
RAMPS NIA			
Specification	Yes	No	Comments/Transition Notes
Slope Maximum 1:12			
Minimum width 4 ft between handrails			
Handrails on both sides if ramp is longer than 6 ft			
Handrails at 34" and 19" from ramp surface			
Handrails extend 12" beyond top and bottom			
Handgrip oval or round			
Handgrip smooth surface			
Handgrip diameter between 1¼" and 2"			
Clearance of 1½" between wall and wall rail			
Non-slip surface			
Level platforms (4ft x 4 ft) at every 30 ft, at top, at bottom, at change of direction			

Notes

There is parking at the adjacent Post office with one handicap parking space.

Location

SITE ACCESS, PATH OF TRAVEL, ENTRANCES			
Specification	Yes	No	Comments/Transition Notes
Site Access			
Accessible path of travel from passenger disembarking area and parking area to accessible entrance	✓		
Disembarking area at accessible entrance		✓	
Surface evenly paved or hard-packed	✓		
No ponding of water	✓		
Path of Travel			
Path does not require the use of stairs		✓	
Path is stable, firm and slip resistant	✓		
3 ft wide minimum	✓		
Slope maximum 1:20 (5%) and maximum cross pitch is 2% (1:50).		✓	It is steep to access playground
Continuous common surface, no changes in level greater than 1/2 inch		✓	
Any objects protruding onto the pathway must be detected by a person with a visual disability using a cane	✓		
Objects protruding more than 4" from the wall must be within 27" of the ground, or higher than 80"			NA
Curb on the pathway must have curb cuts at drives, parking and drop-offs			
Entrances NIA			
Primary public entrances accessible to person using wheelchair, must be signed, gotten to independently, and <i>not</i> be the service entrance			
Level space extending 5 ft. from the door, interior and exterior of entrance doors			
Minimum 32" clear width opening (i.e. 36" door with standard hinge)			
At least 18" clear floor area on latch, pull side of door			
Door handle no higher than 48" and operable with a closed fist			
Vestibule is 4 ft plus the width of the door swinging into the space			
Entrance(s) on a level that makes elevators accessible			
Door mats less than 1/2" thick are securely fastened			
Door mats more than 1/2" thick are recessed			
Grates in path of travel have openings of 1/2" maximum			
Signs at non-accessible entrance(s) indicate direction to accessible entrance			
Emergency egress – alarms with flashing lights and audible signals, sufficiently lighted			

Notes

Location

STAIRS and DOORS N/A			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Stairs			
No open risers			
Nosings not projecting			
Treads no less than 11" wide			
Handrails on both sides			
Handrails 34"-38" above tread			
Handrail extends a minimum of 1 ft beyond top and bottom riser (if no safety hazard and space permits)			
Handgrip oval or round			
Handgrip has a smooth surface			
Handgrip diameter between 1¼" and 1½"			
1½" clearance between wall and handrail			
Doors			
Minimum 32" clear opening			
At least 18" clear floor space on pull side of door			
Closing speed minimum 3 seconds to within 3" of the latch			
Maximum pressure 5 pounds interior doors			
Threshold maximum ½" high, beveled on both sides			
Hardware operable with a closed fist (no conventional door knobs or thumb latch devices)			
Hardware minimum 36", maximum 48" above the floor			
Clear, level floor space extends out 5 ft from both sides of the door			
Door adjacent to revolving door is accessible and unlocked			
Doors opening into hazardous area have hardware that is knurled or roughened			

Notes

Location

RESTROOMS – also see Doors and Vestibules N/A			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
5 ft turning space measured 12" from the floor			
At least one Sink:			
Clear floor space of 30" by 48" to allow a forward approach			
Mounted without pedestal or legs, height 34" to top of rim			
Extends at least 22" from the wall			
Open knee space a minimum 19" deep, 30" width, and 27" high			
Cover exposed pipes with insulation			
Faucets operable with closed fist (lever or spring activated handle)			
At least one Stall:			
Accessible to person using wheelchair at 60" wide by 72" deep			
Stall door is 36" wide			
Stall door swings out			
Stall door is self closing			
Stall door has a pull latch			
Lock on stall door is operable with a closed fist, and 32" above the floor			
Coat hook is 54" high			
Toilet			
18" from center to nearest side wall			
42" minimum clear space from center to farthest wall or fixture			
Top of seat 17"-19" above the floor			
Grab Bars			
On back and side wall closest to toilet			
1½" diameter			
1½" clearance to wall			
Located 30" above and parallel to the floor			
Acid-etched or roughened surface			
42" long			
Fixtures			
Toilet paper dispenser is 24" above floor			
One mirror set a maximum 38" to bottom (if tilted, 42")			
Dispensers (towel, soap, etc) at least one of each a maximum 42" above the floor			

Notes

Location

FLOORS, DRINKING FOUNTAINS, TELEPHONES N/A			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Floors			
Non-slip surface			
Carpeting is high-density, low pile, non-absorbent, stretched taut, securely anchored			
Corridor width minimum is 3 ft			
Objects (signs, ceiling lights, fixtures) can only protrude 4" into the path of travel from a height of 27" to 80" above the floor			
Drinking Fountains			
Spouts no higher than 36" from floor to outlet			
Hand operated push button or level controls			
Spouts located near front with stream of water as parallel to front as possible			
If recessed, recess a minimum 30" width, and no deeper than depth of fountain			
If no clear knee space underneath, clear floor space 30" x 48" to allow parallel approach			
Telephones			
Highest operating part a maximum 54" above the floor			
Access within 12" of phone, 30" high by 30" wide			
Adjustable volume control on headset so identified			
SIGNS, SIGNALS, AND SWITCHES			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Switches, Controls and Signs			
Switches and controls for light, heat, ventilation, windows, fire alarms, thermostats, etc, must be a minimum of 36" and a maximum of 48" above the floor for a forward reach, a maximum of 54" for a side reach			
Electrical outlets centered no lower than 18" above the floor			
Warning signals must be visual as well as audible			
Signs			
Mounting height must be 60" to centerline of the sign			
Within 18" of door jamb or recessed			
Letters and numbers a t least 1¼" high			
Letters and numbers raised .03"			
Letters and numbers contrast with the background color			

Notes

Location

NIA

SWIMMING POOLS – accessibility can be via ramp, lifting device, or transfer area			
Specification	Yes	No	Comments/Transition Notes
Ramp at least 34" wide with a non-slip surface extending into the shallow end, slope not exceeding 1:6 with handrails on both sides			
Lifting device			
Transfer area 18" above the path of travel and a minimum of 18" wide			
Unobstructed path of travel not less than 48" wide around pool			
Non-slip surface			

Location

NIA

SHOWER ROOMS - Showers must accommodate both wheel-in and transfer use			
Specification	Yes	No	Comments/Transition Notes
Stalls 36" by 60" minimum, with a 36" door opening			
Floors are pitched to drain the stall at the corner farthest from entrance			
Floors are non-slip surface			
Controls operate by a single lever with a pressure balance mixing valve			
Controls are located on the center wall adjacent to the hinged seat			
Shower heads attached to a flexible metal hose			
Shower heads attached to wall mounting adjustable from 42" to 72" above the floor			
Seat is hinged and padded and at least 16" deep, folds upward, securely attached to side wall, height is 18" to the top of the seat, and at least 24" long			
Soap trays without handhold features unless they can support 250 pounds			
2 grab bars are provided, one 30" and one 48" long, or one continuous L shaped bar			
Grab bars are placed horizontally at 36" above the floor line			

Location

PICNICKING			
Specification	Yes	No	Comments/Transition Notes
A minimum of 5% of the total tables must be accessible with clear space under the table top not less than 30" wide and 19" deep per seating space and not less than 27" clear from the ground to the underside of the table. An additional 29" clear space (totaling 48") must extend beyond the 19" clear space under the table to provide access		✓	
For tables without toe clearance, the knee space under the table must be at least 28" high, 30" wide and 24" deep.		✓	
Top of table no higher than 32" above ground	✓		
Surface of the clear ground space under and around the table must be stable, firm and slip-resistant, and evenly graded with a maximum slope of 2% in all directions		✓	
Accessible tables, grills and fire rings must have clear ground space of at least 36" around the perimeter			NA

Facility Inventory

Location: *Sagamore Highlands*

ACTIVITY	EQUIPMENT	NOTES
Picnic Facilities <i>N/A</i>	Tables & Benches	Located adjacent to accessible paths
		Access to Open Spaces
		Back and Arm Rests
		Adequate number
	Grills	Height of Cooking Surface
Trash Cans	Picnic Shelters	Located adjacent to accessible paths
		Located adjacent to accessible paths
		Located near accessible water fountains, trash can, restroom, parking, etc.
Trails <i>1</i>		Surface material <i>dirt</i>
		Dimensions <i>1.5' wide</i>
		Rails <i>NO</i>
		Signage (for visually impaired) <i>NO</i>
Swimming Facilities <i>N/A</i>	Pools	Entrance
		Location from accessible parking
		Safety features i.e. warning for visually impaired
	Beaches	Location from accessible path into water
		Handrails
		Location from accessible parking
Play Areas (tot lots) <i>N/A</i>	All Play Equipment i.e. swings, slides	Same experience provided to all
	Access Routes	Located adjacent to accessible paths Enough space between equipment for wheelchair
Game Areas: *ballfield *basketball *tennis <i>N/A</i>	Access Routes	Located adjacent to accessible paths
		Berm cuts onto courts
	Equipment	Height
		Dimensions
Boat Docks <i>N/A</i>	Access Routes	Located adjacent to accessible paths
		Handrails
Fishing Facilities <i>N/A</i>	Access Routes	Located adjacent to accessible paths
		Handrails
	Equipment	Arm Rests
		Bait Shelves
		Handrails
Programming <i>N/A</i>	Are special programs at your facilities accessible?	Learn-to-Swim
		Guided Hikes
		Interpretive Programs
Services and Technical Assistance <i>N/A</i>		Information available in alternative formats i.e. for visually impaired
		Process to request interpretive services (i.e. sign language interpreter) for meetings

Trails are not accessible - they are too narrow and there are boulders / tree stumps that are in the path

Location:

PARKING			
<i>Total Spaces</i>		<i>Required Accessible Spaces</i> None	
Up to 25	4 spaces		
26-50			1 space
51-75			2 spaces
76-100			3 spaces
101-150			4 spaces
151-200			5 spaces
201-300			6 spaces
301-400			7 spaces
401-500			8 spaces
<i>Specification for Accessible Spaces</i>	N/A	Yes	No <i>Comments/Transition Notes</i>
Accessible space located closest to accessible entrance			
Where spaces cannot be located within 200 ft of accessible entrance, drop-off area is provided within 100 ft.			
Minimum width of 13 ft includes 8 ft space plus 5 ft access aisle			
Van space – minimum of 1 van space for every accessible space, 8 ft wide plus 8 ft aisle. Alternative is to make all accessible spaces 11 ft wide with 5 ft aisle.			
Sign with international symbol of accessibility at each space or pair of spaces			
Sign minimum 5 ft, maximum 8 ft to top of sign			
Surface evenly paved or hard-packed (no cracks)			
Surface slope less than 1:20, 5%			
Curbscut to pathway from parking lot at each space or pair of spaces, if sidewalk (curb) is present			
Curbscut is a minimum width of 3 ft, excluding sloped sides, has sloped sides, all slopes not to exceed 1:12, and textured or painted yellow			
RAMPS N/A			
<i>Specification</i>	Yes	No	<i>Comments/Transition Notes</i>
Slope Maximum 1:12			
Minimum width 4 ft between handrails			
Handrails on both sides if ramp is longer than 6 ft			
Handrails at 34" and 19" from ramp surface			
Handrails extend 12" beyond top and bottom			
Handgrip oval or round			
Handgrip smooth surface			
Handgrip diameter between 1 1/4" and 2"			
Clearance of 1 1/2" between wall and wall rail			
Non-slip surface			
Level platforms (4ft x 4 ft) at every 30 ft, at top, at bottom, at change of direction			

Notes

Parking is Far from the trailhead

Location

SITE ACCESS, PATH OF TRAVEL, ENTRANCES			
Specification	Yes	No	Comments/Transition Notes
Site Access			
Accessible path of travel from passenger disembarking area and parking area to accessible entrance		✓	
Disembarking area at accessible entrance	✓		
Surface evenly paved or hard-packed		✓	
No ponding of water		✓	
Path of Travel			
Path does not require the use of stairs	✓		
Path is stable, firm and slip resistant		✓	
3 ft wide minimum		✓	
Slope maximum 1:20 (5%) and maximum cross pitch is 2% (1:50).	✓		
Continuous common surface, no changes in level greater than ½ inch		✓	
Any objects protruding onto the pathway must be detected by a person with a visual disability using a cane	✓		
Objects protruding more than 4" from the wall must be within 27" of the ground, or higher than 80"			N/A
Curb on the pathway must have curb cuts at drives, parking and drop-offs			N/A
Entrances			
Primary public entrances accessible to person using wheelchair, must be signed, gotten to independently, and <i>not</i> be the service entrance			N/A
Level space extending 5 ft. from the door, interior and exterior of entrance doors			
Minimum 32" clear width opening (i.e. 36" door with standard hinge)			
At least 18" clear floor area on latch, pull side of door			
Door handle no higher than 48" and operable with a closed fist			
Vestibule is 4 ft plus the width of the door swinging into the space			
Entrance(s) on a level that makes elevators accessible			
Door mats less than ½" thick are securely fastened			
Door mats more than ½" thick are recessed			
Grates in path of travel have openings of ½" maximum			
Signs at non-accessible entrance(s) indicate direction to accessible entrance			
Emergency egress – alarms with flashing lights and audible signals, sufficiently lighted			

Notes

Site access is too uneven - the pavement is cracked and uneven and the trail is uneven (dirt). The path is too narrow to be accessible. Large boulders prevent access by wheelchairs.

Location

STAIRS and DOORS N/A			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Stairs			
No open risers			
Nosings not projecting			
Treads no less than 11" wide			
Handrails on both sides			
Handrails 34"-38" above tread			
Handrail extends a minimum of 1 ft beyond top and bottom riser (if no safety hazard and space permits)			
Handgrip oval or round			
Handgrip has a smooth surface			
Handgrip diameter between 1¼" and 1½"			
1½" clearance between wall and handrail			
Doors			
Minimum 32" clear opening			
At least 18" clear floor space on pull side of door			
Closing speed minimum 3 seconds to within 3" of the latch			
Maximum pressure 5 pounds interior doors			
Threshold maximum ½" high, beveled on both sides			
Hardware operable with a closed fist (no conventional door knobs or thumb latch devices)			
Hardware minimum 36", maximum 48" above the floor			
Clear, level floor space extends out 5 ft from both sides of the door			
Door adjacent to revolving door is accessible and unlocked			
Doors opening into hazardous area have hardware that is knurled or roughened			

Notes

Location

RESTROOMS – also see Doors and Vestibules			
Specification	Yes	No	Comments/Transition Notes
5 ft turning space measured 12" from the floor			
At least one Sink:			
Clear floor space of 30" by 48" to allow a forward approach			
Mounted without pedestal or legs, height 34" to top of rim			
Extends at least 22" from the wall			
Open knee space a minimum 19" deep, 30" width, and 27" high			
Cover exposed pipes with insulation			
Faucets operable with closed fist (lever or spring activated handle)			
At least one Stall:			
Accessible to person using wheelchair at 60" wide by 72" deep			
Stall door is 36" wide			
Stall door swings out			
Stall door is self closing			
Stall door has a pull latch			
Lock on stall door is operable with a closed fist, and 32" above the floor			
Coat hook is 54" high			
Toilet			
18" from center to nearest side wall			
42" minimum clear space from center to farthest wall or fixture			
Top of seat 17"-19" above the floor			
Grab Bars			
On back and side wall closest to toilet			
1½" diameter			
1½" clearance to wall			
Located 30" above and parallel to the floor			
Acid-etched or roughened surface			
42" long			
Fixtures			
Toilet paper dispenser is 24" above floor			
One mirror set a maximum 38" to bottom (if tilted, 42")			
Dispensers (towel, soap, etc) at least one of each a maximum 42" above the floor			

Notes

Location

N/A

FLOORS, DRINKING FOUNTAINS, TELEPHONES			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Floors			
Non-slip surface			
Carpeting is high-density, low pile, non-absorbent, stretched taut, securely anchored			
Corridor width minimum is 3 ft			
Objects (signs, ceiling lights, fixtures) can only protrude 4" into the path of travel from a height of 27" to 80" above the floor			
Drinking Fountains			
Spouts no higher than 36" from floor to outlet			
Hand operated push button or level controls			
Spouts located near front with stream of water as parallel to front as possible			
If recessed, recess a minimum 30" width, and no deeper than depth of fountain			
If no clear knee space underneath, clear floor space 30" x 48" to allow parallel approach			
Telephones			
Highest operating part a maximum 54" above the floor			
Access within 12" of phone, 30" high by 30" wide			
Adjustable volume control on headset so identified			
SIGNS, SIGNALS, AND SWITCHES			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Switches, Controls and Signs			
Switches and controls for light, heat, ventilation, windows, fire alarms, thermostats, etc, must be a minimum of 36" and a maximum of 48" above the floor for a forward reach, a maximum of 54" for a side reach			
Electrical outlets centered no lower than 18" above the floor			
Warning signals must be visual as well as audible			
Signs			
Mounting height must be 60" to centerline of the sign			
Within 18" of door jamb or recessed			
Letters and numbers at least 1/4" high			
Letters and numbers raised .03"			
Letters and numbers contrast with the background color			

Notes

Location

SWIMMING POOLS – accessibility can be via ramp, lifting device, or transfer area N/A			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Ramp at least 34" wide with a non-slip surface extending into the shallow end, slope not exceeding 1:6 with handrails on both sides			
Lifting device			
Transfer area 18" above the path of travel and a minimum of 18" wide			
Unobstructed path of travel not less than 48" wide around pool			
Non-slip surface			

Location

SHOWER ROOMS - Showers must accommodate both wheel-in and transfer use N/A			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Stalls 36" by 60" minimum, with a 36" door opening			
Floors are pitched to drain the stall at the corner farthest from entrance			
Floors are non-slip surface			
Controls operate by a single lever with a pressure balance mixing valve			
Controls are located on the center wall adjacent to the hinged seat			
Shower heads attached to a flexible metal hose			
Shower heads attached to wall mounting adjustable from 42" to 72" above the floor			
Seat is hinged and padded and at least 16" deep, folds upward, securely attached to side wall, height is 18" to the top of the seat, and at least 24" long			
Soap trays without handhold features unless they can support 250 pounds			
2 grab bars are provided, one 30" and one 48" long, or one continuous L shaped bar			
Grab bars are placed horizontally at 36" above the floor line			

Location

PICNICKING N/A			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
A minimum of 5% of the total tables must be accessible with clear space under the table top not less than 30" wide and 19" deep per seating space and not less than 27" clear from the ground to the underside of the table. An additional 29" clear space (totaling 48") must extend beyond the 19" clear space under the table to provide access			
For tables without toe clearance, the knee space under the table must be at least 28" high, 30" wide and 24" deep.			
Top of table no higher than 32" above ground			
Surface of the clear ground space under and around the table must be stable, firm and slip-resistant, and evenly graded with a maximum slope of 2% in all directions			
Accessible tables, grills and fire rings must have clear ground space of at least 36" around the perimeter			

Facility Inventory

Location: Shore Road Ballfields and Conservation Area

ACTIVITY	EQUIPMENT	NOTES
Picnic Facilities <i>NIA</i>	Tables & Benches	Located adjacent to accessible paths
		Access to Open Spaces
		Back and Arm Rests
		Adequate number
	Grills	Height of Cooking Surface
	Trash Cans	Located adjacent to accessible paths
Picnic Shelters		Located adjacent to accessible paths
		Located near accessible water fountains, trash can, restroom, parking, etc.
Trails <i>NIA</i>		Surface material
		Dimensions
		Rails
		Signage (for visually impaired)
Swimming Facilities <i>NIA</i>	Pools	Entrance
		Location from accessible parking
		Safety features i.e. warning for visually impaired
	Beaches	Location from accessible path into water
		Handrails
		Location from accessible parking
Play Areas (tot lots)	All Play Equipment i.e. swings, slides	Same experience provided to all <i>NO</i>
	Access Routes	Located adjacent to accessible paths <i>NO - access is elevated</i> Enough space between equipment for wheelchair
Game Areas: *ballfield *basketball *tennis	Access Routes	Located adjacent to accessible paths <i>NO - only dirt paths</i>
		Berm cuts onto courts <i>NIA</i>
	Equipment	Height
		Dimensions
Spectator Seating		
Boat Docks <i>NIA</i>	Access Routes	Located adjacent to accessible paths
		Handrails
Fishing Facilities <i>NIA</i>	Access Routes	Located adjacent to accessible paths
		Handrails
	Equipment	Arm Rests
		Bait Shelves
		Handrails
		Fish Cleaning Tables
Programming <i>NIA</i>	Are special programs at your facilities accessible?	Learn-to-Swim
		Guided Hikes
		Interpretive Programs
Services and Technical Assistance <i>NIA</i>		Information available in alternative formats i.e. for visually impaired
		Process to request interpretive services (i.e. sign language interpreter) for meetings

Location:

PARKING			
<i>Total Spaces</i>	<i>Required Accessible Spaces</i> None		
Up to 25	1 space		
26-50	2 spaces		
51-75	3 spaces		
76-100	4 spaces		
101-150	5 spaces		
151-200	6 spaces		
201-300	7 spaces		
301-400	8 spaces		
401-500	9 spaces		
<i>Specification for Accessible Spaces</i>	Yes	No	<i>Comments/Transition Notes</i>
Accessible space located closest to accessible entrance		X	
Where spaces cannot be located within 200 ft of accessible entrance, drop-off area is provided within 100 ft.		X	
Minimum width of 13 ft includes 8 ft space plus 5 ft access aisle			
Van space – minimum of 1 van space for every accessible space, 8 ft wide plus 8 ft aisle. Alternative is to make all accessible spaces 11 ft wide with 5 ft aisle.			
Sign with international symbol of accessibility at each space or pair of spaces		X	
Sign minimum 5 ft, maximum 8 ft to top of sign			
Surface evenly paved or hard-packed (no cracks)		X	
Surface slope less than 1:20, 5%	X		
Curbcut to pathway from parking lot at each space or pair of spaces, if sidewalk (curb) is present		N/A	
Curbcut is a minimum width of 3 ft, excluding sloped sides, has sloped sides, all slopes not to exceed 1:12, and textured or painted yellow		N/A	
RAMPS			
<i>Specification</i>	Yes	No	<i>Comments/Transition Notes</i>
Slope Maximum 1:12			
Minimum width 4 ft between handrails			
Handrails on both sides if ramp is longer than 6 ft			
Handrails at 34" and 19" from ramp surface			
Handrails extend 12" beyond top and bottom			
Handgrip oval or round			
Handgrip smooth surface			
Handgrip diameter between 1¼" and 2"			
Clearance of 1½" between wall and wall rail			
Non-slip surface			
Level platforms (4ft x 4 ft) at every 30 ft, at top, at bottom, at change of direction			

Notes

Parking lot is dirt.

Location

SITE ACCESS, PATH OF TRAVEL, ENTRANCES			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Site Access			
Accessible path of travel from passenger disembarking area and parking area to accessible entrance		X	
Disembarking area at accessible entrance		X	
Surface evenly paved or hard-packed		X	
No ponding of water		X	
Path of Travel			
Path does not require the use of stairs	X		
Path is stable, firm and slip resistant		X	
3 ft wide minimum	X		
Slope maximum 1:20 (5%) and maximum cross pitch is 2% (1:50).	X		
Continuous common surface, no changes in level greater than 1/2 inch		X	
Any objects protruding onto the pathway must be detected by a person with a visual disability using a cane		X	
Objects protruding more than 4" from the wall must be within 27" of the ground, or higher than 80"		N/A	
Curb on the pathway must have curb cuts at drives, parking and drop-offs		N/A	
Entrances			
Primary public entrances accessible to person using wheelchair, must be signed, gotten to independently, and <i>not</i> be the service entrance			
Level space extending 5 ft. from the door, interior and exterior of entrance doors			
Minimum 32" clear width opening (i.e. 36" door with standard hinge)			
At least 18" clear floor area on latch, pull side of door			
Door handle no higher than 48" and operable with a closed fist			
Vestibule is 4 ft plus the width of the door swinging into the space			
Entrance(s) on a level that makes elevators accessible			
Door mats less than 1/2" thick are securely fastened			
Door mats more than 1/2" thick are recessed			
Grates in path of travel have openings of 1/2" maximum			
Signs at non-accessible entrance(s) indicate direction to accessible entrance			
Emergency egress – alarms with flashing lights and audible signals, sufficiently lighted			

Notes

Location

STAIRS and DOORS N/A			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Stairs			
No open risers			
Nosings not projecting			
Treads no less than 11" wide			
Handrails on both sides			
Handrails 34"-38" above tread			
Handrail extends a minimum of 1 ft beyond top and bottom riser (if no safety hazard and space permits)			
Handgrip oval or round			
Handgrip has a smooth surface			
Handgrip diameter between 1¼" and 1½"			
1½" clearance between wall and handrail			
Doors			
Minimum 32" clear opening			
At least 18" clear floor space on pull side of door			
Closing speed minimum 3 seconds to within 3" of the latch			
Maximum pressure 5 pounds interior doors			
Threshold maximum ½" high, beveled on both sides			
Hardware operable with a closed fist (no conventional door knobs or thumb latch devices)			
Hardware minimum 36", maximum 48" above the floor			
Clear, level floor space extends out 5 ft from both sides of the door			
Door adjacent to revolving door is accessible and unlocked			
Doors opening into hazardous area have hardware that is knurled or roughened			

Notes

Location

N/A

RESTROOMS – also see Doors and Vestibules			
Specification	Yes	No	Comments/Transition Notes
5 ft turning space measured 12" from the floor			
At least one Sink:			
Clear floor space of 30" by 48" to allow a forward approach			
Mounted without pedestal or legs, height 34" to top of rim			
Extends at least 22" from the wall			
Open knee space a minimum 19" deep, 30" width, and 27" high			
Cover exposed pipes with insulation			
Faucets operable with closed fist (lever or spring activated handle)			
At least one Stall:			
Accessible to person using wheelchair at 60" wide by 72" deep			
Stall door is 36" wide			
Stall door swings out			
Stall door is self closing			
Stall door has a pull latch			
Lock on stall door is operable with a closed fist, and 32" above the floor			
Coat hook is 54" high			
Toilet			
18" from center to nearest side wall			
42" minimum clear space from center to farthest wall or fixture			
Top of seat 17"-19" above the floor			
Grab Bars			
On back and side wall closest to toilet			
1½" diameter			
1½" clearance to wall			
Located 30" above and parallel to the floor			
Acid-etched or roughened surface			
42" long			
Fixtures			
Toilet paper dispenser is 24" above floor			
One mirror set a maximum 38" to bottom (if tilted, 42")			
Dispensers (towel, soap, etc) at least one of each a maximum 42" above the floor			

Notes

Location

NA

FLOORS, DRINKING FOUNTAINS, TELEPHONES			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Floors			
Non-slip surface			
Carpeting is high-density, low pile, non-absorbent, stretched taut, securely anchored			
Corridor width minimum is 3 ft			
Objects (signs, ceiling lights, fixtures) can only protrude 4" into the path of travel from a height of 27" to 80" above the floor			
Drinking Fountains			
Spouts no higher than 36" from floor to outlet			
Hand operated push button or level controls			
Spouts located near front with stream of water as parallel to front as possible			
If recessed, recess a minimum 30" width, and no deeper than depth of fountain			
If no clear knee space underneath, clear floor space 30" x 48" to allow parallel approach			
Telephones			
Highest operating part a maximum 54" above the floor			
Access within 12" of phone, 30" high by 30" wide			
Adjustable volume control on headset so identified			
SIGNS, SIGNALS, AND SWITCHES			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Switches, Controls and Signs			
Switches and controls for light, heat, ventilation, windows, fire alarms, thermostats, etc, must be a minimum of 36" and a maximum of 48" above the floor for a forward reach, a maximum of 54" for a side reach			
Electrical outlets centered no lower than 18" above the floor			
Warning signals must be visual as well as audible			
Signs			
Mounting height must be 60" to centerline of the sign			
Within 18" of door jamb or recessed			
Letters and numbers a t least 1¼" high			
Letters and numbers raised .03"			
Letters and numbers contrast with the background color			

Notes

Location **NIA**

SWIMMING POOLS – accessibility can be via ramp, lifting device, or transfer area			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Ramp at least 34" wide with a non-slip surface extending into the shallow end, slope not exceeding 1:6 with handrails on both sides			
Lifting device			
Transfer area 18" above the path of travel and a minimum of 18" wide			
Unobstructed path of travel not less than 48" wide around pool			
Non-slip surface			

Location **NIA**

SHOWER ROOMS - Showers must accommodate both wheel-in and transfer use			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Stalls 36" by 60" minimum, with a 36" door opening			
Floors are pitched to drain the stall at the corner farthest from entrance			
Floors are non-slip surface			
Controls operate by a single lever with a pressure balance mixing valve			
Controls are located on the center wall adjacent to the hinged seat			
Shower heads attached to a flexible metal hose			
Shower heads attached to wall mounting adjustable from 42" to 72" above the floor			
Seat is hinged and padded and at least 16" deep, folds upward, securely attached to side wall, height is 18" to the top of the seat, and at least 24" long			
Soap trays without handhold features unless they can support 250 pounds			
2 grab bars are provided, one 30" and one 48" long, or one continuous L shaped bar			
Grab bars are placed horizontally at 36" above the floor line			

Location **NIA**

PICNICKING			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
A minimum of 5% of the total tables must be accessible with clear space under the table top not less than 30" wide and 19" deep per seating space and not less than 27" clear from the ground to the underside of the table. An additional 29" clear space (totaling 48") must extend beyond the 19" clear space under the table to provide access			
For tables without toe clearance, the knee space under the table must be at least 28" high, 30" wide and 24" deep.			
Top of table no higher than 32" above ground			
Surface of the clear ground space under and around the table must be stable, firm and slip-resistant, and evenly graded with a maximum slope of 2% in all directions			
Accessible tables, grills and fire rings must have clear ground space of at least 36" around the perimeter			

Facility Inventory

Location: *The Strand - off Phillips Road*

ACTIVITY	EQUIPMENT	NOTES
Picnic Facilities <i>N/A</i>	Tables & Benches	Located adjacent to accessible paths
		Access to Open Spaces
		Back and Arm Rests
		Adequate number
	Grills	Height of Cooking Surface
Trash Cans	Picnic Shelters	Located adjacent to accessible paths
		Located adjacent to accessible paths
		Located near accessible water fountains, trash can, restroom, parking, etc.
Trails <i>N/A</i>		Surface material
		Dimensions
		Rails
		Signage (for visually impaired)
Swimming Facilities <i>N/A</i>	Pools	Entrance
		Location from accessible parking
		Safety features i.e. warning for visually impaired
	Beaches	Location from accessible path into water
		Handrails
Shade provided		
Play Areas (tot lots) <i>N/A</i>	All Play Equipment i.e. swings, slides	Same experience provided to all
	Access Routes	Located adjacent to accessible paths Enough space between equipment for wheelchair
Game Areas: *ballfield *basketball *tennis <i>N/A</i>	Access Routes	Located adjacent to accessible paths Berm cuts onto courts
	Equipment	Height
		Dimensions
Spectator Seating		
Boat Docks <i>N/A</i>	Access Routes	Located adjacent to accessible paths
		Handrails
Fishing Facilities <i>N/A</i>	Access Routes	Located adjacent to accessible paths
		Handrails
	Equipment	Arm Rests
		Bait Shelves
		Fish Cleaning Tables
Programming <i>N/A</i>	Are special programs at your facilities accessible?	Learn-to-Swim
		Guided Hikes
		Interpretive Programs
Services and Technical Assistance <i>N/A</i>		Information available in alternative formats i.e. for visually impaired
		Process to request interpretive services (i.e. sign language interpreter) for meetings

Location:

PARKING			
Total Spaces	Required Accessible Spaces		
Up to 25	10 spaces		1 space
26-50			2 spaces
51-75			3 spaces
76-100			4 spaces
101-150			5 spaces
151-200			6 spaces
201-300			7 spaces
301-400			8 spaces
401-500			9 spaces
Specification for Accessible Spaces	Yes	No	Comments/Transition Notes
Accessible space located closest to accessible entrance	✓		
Where spaces cannot be located within 200 ft of accessible entrance, drop-off area is provided within 100 ft.	N/A		
Minimum width of 13 ft includes 8 ft space plus 5 ft access aisle		✓	gravel parking lot with no dedicated
Van space – minimum of 1 van space for every accessible space, 8 ft wide plus 8 ft aisle. Alternative is to make all accessible spaces 11 ft wide with 5 ft aisle.		✓	spaces
Sign with international symbol of accessibility at each space or pair of spaces	✓		
Sign minimum 5 ft, maximum 8 ft to top of sign	✓		
Surface evenly paved or hard-packed (no cracks)	✓		
Surface slope less than 1:20, 5%	✓		
Curbcut to pathway from parking lot at each space or pair of spaces, if sidewalk (curb) is present	N/A		No curb
Curbcut is a minimum width of 3 ft, excluding sloped sides, has sloped sides, all slopes not to exceed 1:12, and textured or painted yellow	N/A		
RAMPS			
Specification	Yes	No	Comments/Transition Notes
Slope Maximum 1:12	✓		
Minimum width 4 ft between handrails		✓	3.5'
Handrails on both sides if ramp is longer than 6 ft	✓		
Handrails at 34" and 19" from ramp surface		—	19" but not 34"
Handrails extend 12" beyond top and bottom			
Handgrip oval or round		✓	
Handgrip smooth surface	✓		
Handgrip diameter between 1 1/4" and 2"	✓		
Clearance of 1 1/2" between wall and wall rail	N/A		
Non-slip surface	✓		
Level platforms (4ft x 4 ft) at every 30 ft, at top, at bottom, at change of direction			

Notes

Last part of ramp was covered in sand, so it was hard to tell if there were stairs but it is unlikely.

Location

SITE ACCESS, PATH OF TRAVEL, ENTRANCES			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Site Access			
Accessible path of travel from passenger disembarking area and parking area to accessible entrance	✓		
Disembarking area at accessible entrance	✓		
Surface evenly paved or hard-packed	✓		
No ponding of water	✓		
Path of Travel			
Path does not require the use of stairs	✓		
Path is stable, firm and slip resistant	✓		
3 ft wide minimum	✓		
Slope maximum 1:20 (5%) and maximum cross pitch is 2% (1:50).	✓		
Continuous common surface, no changes in level greater than ½ inch	✓		
Any objects protruding onto the pathway must be detected by a person with a visual disability using a cane	✓		
Objects protruding more than 4" from the wall must be within 27" of the ground, or higher than 80"	✓		
Curb on the pathway must have curb cuts at drives, parking and drop-offs			N/A
Entrances			
Primary public entrances accessible to person using wheelchair, must be signed, gotten to independently, and <i>not</i> be the service entrance			N/A
Level space extending 5 ft. from the door, interior and exterior of entrance doors			
Minimum 32" clear width opening (i.e. 36" door with standard hinge)			
At least 18" clear floor area on latch, pull side of door			
Door handle no higher than 48" and operable with a closed fist			
Vestibule is 4 ft plus the width of the door swinging into the space			
Entrance(s) on a level that makes elevators accessible			
Door mats less than ½" thick are securely fastened			
Door mats more than ½" thick are recessed			
Grates in path of travel have openings of ½" maximum			
Signs at non-accessible entrance(s) indicate direction to accessible entrance			
Emergency egress – alarms with flashing lights and audible signals, sufficiently lighted			

Notes

Location

STAIRS and DOORS N/A			
Specification	Yes	No	Comments/Transition Notes
Stairs			
No open risers			
Nosings not projecting			
Treads no less than 11" wide			
Handrails on both sides			
Handrails 34"-38" above tread			
Handrail extends a minimum of 1 ft beyond top and bottom riser (if no safety hazard and space permits)			
Handgrip oval or round			
Handgrip has a smooth surface			
Handgrip diameter between 1¼" and 1½"			
1½" clearance between wall and handrail			
Doors			
Minimum 32" clear opening			
At least 18" clear floor space on pull side of door			
Closing speed minimum 3 seconds to within 3" of the latch			
Maximum pressure 5 pounds interior doors			
Threshold maximum ½" high, beveled on both sides			
Hardware operable with a closed fist (no conventional door knobs or thumb latch devices)			
Hardware minimum 36", maximum 48" above the floor			
Clear, level floor space extends out 5 ft from both sides of the door			
Door adjacent to revolving door is accessible and unlocked			
Doors opening into hazardous area have hardware that is knurled or roughened			

Notes

Location

RESTROOMS – also see Doors and Vestibules N/A			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
5 ft turning space measured 12" from the floor			
At least one Sink:			
Clear floor space of 30" by 48" to allow a forward approach			
Mounted without pedestal or legs, height 34" to top of rim			
Extends at least 22" from the wall			
Open knee space a minimum 19" deep, 30" width, and 27" high			
Cover exposed pipes with insulation			
Faucets operable with closed fist (lever or spring activated handle)			
At least one Stall:			
Accessible to person using wheelchair at 60" wide by 72" deep			
Stall door is 36" wide			
Stall door swings out			
Stall door is self closing			
Stall door has a pull latch			
Lock on stall door is operable with a closed fist, and 32" above the floor			
Coat hook is 54" high			
Toilet			
18" from center to nearest side wall			
42" minimum clear space from center to farthest wall or fixture			
Top of seat 17"-19" above the floor			
Grab Bars			
On back and side wall closest to toilet			
1 1/4" diameter			
1 1/2" clearance to wall			
Located 30" above and parallel to the floor			
Acid-etched or roughened surface			
42" long			
Fixtures			
Toilet paper dispenser is 24" above floor			
One mirror set a maximum 38" to bottom (if tilted, 42")			
Dispensers (towel, soap, etc) at least one of each a maximum 42" above the floor			

Notes

Location

FLOORS, DRINKING FOUNTAINS, TELEPHONES N/A			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Floors			
Non-slip surface			
Carpeting is high-density, low pile, non-absorbent, stretched taut, securely anchored			
Corridor width minimum is 3 ft			
Objects (signs, ceiling lights, fixtures) can only protrude 4" into the path of travel from a height of 27" to 80" above the floor			
Drinking Fountains			
Spouts no higher than 36" from floor to outlet			
Hand operated push button or level controls			
Spouts located near front with stream of water as parallel to front as possible			
If recessed, recess a minimum 30" width, and no deeper than depth of fountain			
If no clear knee space underneath, clear floor space 30" x 48" to allow parallel approach			
Telephones			
Highest operating part a maximum 54" above the floor			
Access within 12" of phone, 30" high by 30" wide			
Adjustable volume control on headset so identified			
SIGNS, SIGNALS, AND SWITCHES			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Switches, Controls and Signs			
Switches and controls for light, heat, ventilation, windows, fire alarms, thermostats, etc, must be a minimum of 36" and a maximum of 48" above the floor for a forward reach, a maximum of 54" for a side reach			
Electrical outlets centered no lower than 18" above the floor			
Warning signals must be visual as well as audible			
Signs			
Mounting height must be 60" to centerline of the sign			
Within 18" of door jamb or recessed			
Letters and numbers a t least 1¼" high			
Letters and numbers raised .03"			
Letters and numbers contrast with the background color			

Notes

Location

SWIMMING POOLS – accessibility can be via ramp, lifting device, or transfer area N/A			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Ramp at least 34" wide with a non-slip surface extending into the shallow end, slope not exceeding 1:6 with handrails on both sides			
Lifting device			
Transfer area 18" above the path of travel and a minimum of 18" wide			
Unobstructed path of travel not less than 48" wide around pool			
Non-slip surface			

Location

SHOWER ROOMS - Showers must accommodate both wheel-in and transfer use N/A			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Stalls 36" by 60" minimum, with a 36" door opening			
Floors are pitched to drain the stall at the corner farthest from entrance			
Floors are non-slip surface			
Controls operate by a single lever with a pressure balance mixing valve			
Controls are located on the center wall adjacent to the hinged seat			
Shower heads attached to a flexible metal hose			
Shower heads attached to wall mounting adjustable from 42" to 72" above the floor			
Seat is hinged and padded and at least 16" deep, folds upward, securely attached to side wall, height is 18" to the top of the seat, and at least 24" long			
Soap trays without handhold features unless they can support 250 pounds			
2 grab bars are provided, one 30" and one 48" long, or one continuous L shaped bar			
Grab bars are placed horizontally at 36" above the floor line			

Location

PICNICKING N/A			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
A minimum of 5% of the total tables must be accessible with clear space under the table top not less than 30" wide and 19" deep per seating space and not less than 27" clear from the ground to the underside of the table. An additional 29" clear space (totaling 48") must extend beyond the 19" clear space under the table to provide access			
For tables without toe clearance, the knee space under the table must be at least 28" high, 30" wide and 24" deep.			
Top of table no higher than 32" above ground			
Surface of the clear ground space under and around the table must be stable, firm and slip-resistant, and evenly graded with a maximum slope of 2% in all directions			
Accessible tables, grills and fire rings must have clear ground space of at least 36" around the perimeter			

Facility Inventory

Location:

Town Forest

ACTIVITY	EQUIPMENT	NOTES
Picnic Facilities N/A	Tables & Benches	Located adjacent to accessible paths
		Access to Open Spaces
	Grills	Back and Arm Rests
		Adequate number
	Trash Cans	Height of Cooking Surface
Picnic Shelters	Located adjacent to accessible paths	
	Located adjacent to accessible paths	
Trails		Located near accessible water fountains, trash can, restroom, parking, etc.
		Surface material <i>dirt</i>
		Dimensions <i>greater than 3'</i>
		Rails <i>no</i>
Swimming Facilities N/A	Pools	Signage (for visually impaired) <i>no</i>
		Entrance
		Location from accessible parking
	Beaches	Safety features i.e. warning for visually impaired
		Location from accessible path into water
		Handrails
Play Areas (tot lots) N/A	All Play Equipment i.e. swings, slides	Location from accessible parking
		Shade provided
Game Areas: *ballfield *basketball *tennis N/A	Access Routes	Same experience provided to all
		Located adjacent to accessible paths
Boat Docks N/A	Access Routes	Enough space between equipment for wheelchair
		Located adjacent to accessible paths
	Equipment	Berm cuts onto courts
		Height
Fishing Facilities N/A	Access Routes	Dimensions
		Spectator Seating
	Equipment	Located adjacent to accessible paths
		Handrails
		Arm Rests
Programming N/A	Are special programs at your facilities accessible?	Bait Shelves
		Handrails
		Fish Cleaning Tables
Services and Technical Assistance N/A		Learn-to-Swim
		Guided Hikes
		Interpretive Programs
		Information available in alternative formats i.e. for visually impaired
		Process to request interpretive services (i.e. sign language interpreter) for meetings

Not accessible - no handicapped parking

When gate is closed, there is no access.

Access is also through Four Ponds Conservation Area

Location:

PARKING			
Total Spaces	Required Accessible Spaces		
Up to 25	None		
26-50	1 space		
51-75	2 spaces		
76-100	3 spaces		
101-150	4 spaces		
151-200	5 spaces		
201-300	6 spaces		
301-400	7 spaces		
401-500	8 spaces		
401-500	9 spaces		
Specification for Accessible Spaces	Yes	No	Comments/Transition Notes
Accessible space located closest to accessible entrance		<input checked="" type="checkbox"/>	
Where spaces cannot be located within 200 ft of accessible entrance, drop-off area is provided within 100 ft.			
Minimum width of 13 ft includes 8 ft space plus 5 ft access aisle			
Van space – minimum of 1 van space for every accessible space, 8 ft wide plus 8 ft aisle. Alternative is to make all accessible spaces 11 ft wide with 5 ft aisle.			
Sign with international symbol of accessibility at each space or pair of spaces			
Sign minimum 5 ft, maximum 8 ft to top of sign			
Surface evenly paved or hard-packed (no cracks)			
Surface slope less than 1:20, 5%			
Curbscut to pathway from parking lot at each space or pair of spaces, if sidewalk (curb) is present			
Curbscut is a minimum width of 3 ft, excluding sloped sides, has sloped sides, all slopes not to exceed 1:12, and textured or painted yellow			
RAMPS NA			
Specification	Yes	No	Comments/Transition Notes
Slope Maximum 1:12			
Minimum width 4 ft between handrails			
Handrails on both sides if ramp is longer than 6 ft			
Handrails at 34" and 19" from ramp surface			
Handrails extend 12" beyond top and bottom			
Handgrip oval or round			
Handgrip smooth surface			
Handgrip diameter between 1 1/4" and 2"			
Clearance of 1 1/2" between wall and wall rail			
Non-slip surface			
Level platforms (4ft x 4 ft) at every 30 ft, at top, at bottom, at change of direction			

Notes

Parking lot off County Road

Location

SITE ACCESS, PATH OF TRAVEL, ENTRANCES			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Site Access			
Accessible path of travel from passenger disembarking area and parking area to accessible entrance		✓	
Disembarking area at accessible entrance		✓	
Surface evenly paved or hard-packed		✓	
No ponding of water	✓		
Path of Travel			
Path does not require the use of stairs	✓		
Path is stable, firm and slip resistant		✓	
3 ft wide minimum			gate blocks accessible entry
Slope maximum 1:20 (5%) and maximum cross pitch is 2% (1:50).			
Continuous common surface, no changes in level greater than 1/2 inch		✓	
Any objects protruding onto the pathway must be detected by a person with a visual disability using a cane			
Objects protruding more than 4" from the wall must be within 27" of the ground, or higher than 80"			
Curb on the pathway must have curb cuts at drives, parking and drop-offs			
Entrances			
Primary public entrances accessible to person using wheelchair, must be signed, gotten to independently, and <i>not</i> be the service entrance			
Level space extending 5 ft. from the door, interior and exterior of entrance doors			
Minimum 32" clear width opening (i.e. 36" door with standard hinge)			
At least 18" clear floor area on latch, pull side of door			
Door handle no higher than 48" and operable with a closed fist			
Vestibule is 4 ft plus the width of the door swinging into the space			
Entrance(s) on a level that makes elevators accessible			
Door mats less than 1/2" thick are securely fastened			
Door mats more than 1/2" thick are recessed			
Grates in path of travel have openings of 1/2" maximum			
Signs at non-accessible entrance(s) indicate direction to accessible entrance			
Emergency egress – alarms with flashing lights and audible signals, sufficiently lighted			

Notes

Location

STAIRS and DOORS

N/A

Specification	Yes	No	Comments/Transition Notes
Stairs			
No open risers			
Nosings not projecting			
Treads no less than 11" wide			
Handrails on both sides			
Handrails 34"-38" above tread			
Handrail extends a minimum of 1 ft beyond top and bottom riser (if no safety hazard and space permits)			
Handgrip oval or round			
Handgrip has a smooth surface			
Handgrip diameter between 1¼" and 1½"			
1½" clearance between wall and handrail			
Doors			
Minimum 32" clear opening			
At least 18" clear floor space on pull side of door			
Closing speed minimum 3 seconds to within 3" of the latch			
Maximum pressure 5 pounds interior doors			
Threshold maximum ½" high, beveled on both sides			
Hardware operable with a closed fist (no conventional door knobs or thumb latch devices)			
Hardware minimum 36", maximum 48" above the floor			
Clear, level floor space extends out 5 ft from both sides of the door			
Door adjacent to revolving door is accessible and unlocked			
Doors opening into hazardous area have hardware that is knurled or roughened			

Notes

Location

RESTROOMS – also see Doors and Vestibules N/A			
Specification	Yes	No	Comments/Transition Notes
5 ft turning space measured 12" from the floor			
At least one Sink:			
Clear floor space of 30" by 48" to allow a forward approach			
Mounted without pedestal or legs, height 34" to top of rim			
Extends at least 22" from the wall			
Open knee space a minimum 19" deep, 30" width, and 27" high			
Cover exposed pipes with insulation			
Faucets operable with closed fist (lever or spring activated handle)			
At least one Stall:			
Accessible to person using wheelchair at 60" wide by 72" deep			
Stall door is 36" wide			
Stall door swings out			
Stall door is self closing			
Stall door has a pull latch			
Lock on stall door is operable with a closed fist, and 32" above the floor			
Coat hook is 54" high			
Toilet			
18" from center to nearest side wall			
42" minimum clear space from center to farthest wall or fixture			
Top of seat 17"-19" above the floor			
Grab Bars			
On back and side wall closest to toilet			
1½" diameter			
1½" clearance to wall			
Located 30" above and parallel to the floor			
Acid-etched or roughened surface			
42" long			
Fixtures			
Toilet paper dispenser is 24" above floor			
One mirror set a maximum 38" to bottom (if tilted, 42")			
Dispensers (towel, soap, etc) at least one of each a maximum 42" above the floor			

Notes

Location

FLOORS, DRINKING FOUNTAINS, TELEPHONES

N/A

<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Floors			
Non-slip surface			
Carpeting is high-density, low pile, non-absorbent, stretched taut, securely anchored			
Corridor width minimum is 3 ft			
Objects (signs, ceiling lights, fixtures) can only protrude 4" into the path of travel from a height of 27" to 80" above the floor			
Drinking Fountains			
Spouts no higher than 36" from floor to outlet			
Hand operated push button or level controls			
Spouts located near front with stream of water as parallel to front as possible			
If recessed, recess a minimum 30" width, and no deeper than depth of fountain			
If no clear knee space underneath, clear floor space 30" x 48" to allow parallel approach			
Telephones			
Highest operating part a maximum 54" above the floor			
Access within 12" of phone, 30" high by 30" wide			
Adjustable volume control on headset so identified			
SIGNS, SIGNALS, AND SWITCHES			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Switches, Controls and Signs			
Switches and controls for light, heat, ventilation, windows, fire alarms, thermostats, etc, must be a minimum of 36" and a maximum of 48" above the floor for a forward reach, a maximum of 54" for a side reach			
Electrical outlets centered no lower than 18" above the floor			
Warning signals must be visual as well as audible			
Signs			
Mounting height must be 60" to centerline of the sign			
Within 18" of door jamb or recessed			
Letters and numbers at least 1/4" high			
Letters and numbers raised .03"			
Letters and numbers contrast with the background color			

Notes

Location

SWIMMING POOLS – accessibility can be via ramp, lifting device, or transfer area N/A			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Ramp at least 34" wide with a non-slip surface extending into the shallow end, slope not exceeding 1:6 with handrails on both sides			
Lifting device			
Transfer area 18" above the path of travel and a minimum of 18" wide			
Unobstructed path of travel not less than 48" wide around pool			
Non-slip surface			

Location

SHOWER ROOMS - Showers must accommodate both wheel-in and transfer use N/A			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Stalls 36" by 60" minimum, with a 36" door opening			
Floors are pitched to drain the stall at the corner farthest from entrance			
Floors are non-slip surface			
Controls operate by a single lever with a pressure balance mixing valve			
Controls are located on the center wall adjacent to the hinged seat			
Shower heads attached to a flexible metal hose			
Shower heads attached to wall mounting adjustable from 42" to 72" above the floor			
Seat is hinged and padded and at least 16" deep, folds upward, securely attached to side wall, height is 18" to the top of the seat, and at least 24" long			
Soap trays without handhold features unless they can support 250 pounds			
2 grab bars are provided, one 30" and one 48" long, or one continuous L shaped bar			
Grab bars are placed horizontally at 36" above the floor line			

Location

PICNICKING N/A			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
A minimum of 5% of the total tables must be accessible with clear space under the table top not less than 30" wide and 19" deep per seating space and not less than 27" clear from the ground to the underside of the table. An additional 29" clear space (totaling 48") must extend beyond the 19" clear space under the table to provide access			
For tables without toe clearance, the knee space under the table must be at least 28" high, 30" wide and 24" deep.			
Top of table no higher than 32" above ground			
Surface of the clear ground space under and around the table must be stable, firm and slip-resistant, and evenly graded with a maximum slope of 2% in all directions			
Accessible tables, grills and fire rings must have clear ground space of at least 36" around the perimeter			

Facility Inventory

Location: Bourne Town Hall / Veteran's Park

ACTIVITY	EQUIPMENT	NOTES
Picnic Facilities N/A	Tables & Benches	Located adjacent to accessible paths
		Access to Open Spaces
		Back and Arm Rests
		Adequate number
	Grills	Height of Cooking Surface
	Trash Cans	Located adjacent to accessible paths
		Located adjacent to accessible paths
Picnic Shelters	Located near accessible water fountains, trash can, restroom, parking, etc.	
Trails N/A		Surface material
		Dimensions
		Rails
		Signage (for visually impaired)
Swimming Facilities N/A	Pools	Entrance
		Location from accessible parking
		Safety features i.e. warning for visually impaired
	Beaches	Location from accessible path into water
		Handrails
		Location from accessible parking
Play Areas (tot lots) N/A	All Play Equipment i.e. swings, slides	Same experience provided to all
	Access Routes	Located adjacent to accessible paths
		Enough space between equipment for wheelchair
Game Areas: *ballfield *basketball *tennis	Access Routes	Located adjacent to accessible paths
		Berm cuts onto courts
	Equipment	Height
		Dimensions
		Spectator Seating
Boat Docks N/A	Access Routes	Located adjacent to accessible paths
		Handrails
Fishing Facilities N/A	Access Routes	Located adjacent to accessible paths
		Handrails
	Equipment	Arm Rests
		Bait Shelves
		Handrails
		Fish Cleaning Tables
Programming N/A	Are special programs at your facilities accessible?	Learn-to-Swim
		Guided Hikes
		Interpretive Programs
Services and Technical Assistance N/A		Information available in alternative formats i.e. for visually impaired
		Process to request interpretive services (i.e. sign language interpreter) for meetings

Pathways to Veterans Memorials needs to be widened and repaved
Handicapped spaces in the back of town hall need signage

Location:

PARKING			
<i>Total Spaces</i>	<i>Required Accessible Spaces</i>		
Up to 25	1 space		
26-50	2 spaces		
51-75	3 spaces		
76-100	4 spaces		
101-150	5 spaces		
151-200	6 spaces		
201-300	7 spaces		
301-400	8 spaces		
401-500	9 spaces		
<i>Specification for Accessible Spaces</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Accessible space located closest to accessible entrance	✓		
Where spaces cannot be located within 200 ft of accessible entrance, drop-off area is provided within 100 ft.	✓		
Minimum width of 13 ft includes 8 ft space plus 5 ft access aisle	✓		
Van space – minimum of 1 van space for every accessible space, 8 ft wide plus 8 ft aisle. Alternative is to make all accessible spaces 11 ft wide with 5 ft aisle.		✓	
Sign with international symbol of accessibility at each space or pair of spaces	✓		
Sign minimum 5 ft, maximum 8 ft to top of sign	✓		
Surface evenly paved or hard-packed (no cracks)	✓		
Surface slope less than 1:20, 5%	✓		
Curbscut to pathway from parking lot at each space or pair of spaces, if sidewalk (curb) is present	✓		
Curbscut is a minimum width of 3 ft, excluding sloped sides, has sloped sides, all slopes not to exceed 1:12, and textured or painted yellow	✓		
RAMPS N/A			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Slope Maximum 1:12			
Minimum width 4 ft between handrails			
Handrails on both sides if ramp is longer than 6 ft			
Handrails at 34" and 19" from ramp surface			
Handrails extend 12" beyond top and bottom			
Handgrip oval or round			
Handgrip smooth surface			
Handgrip diameter between 1 1/4" and 2"			
Clearance of 1 1/2" between wall and wall rail			
Non-slip surface			
Level platforms (4ft x 4 ft) at every 30 ft, at top, at bottom, at change of direction			

Notes

One handicapped parking space in front of building with signage
 Two spots in the back with no signage.

Location

SITE ACCESS, PATH OF TRAVEL, ENTRANCES			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Site Access			
Accessible path of travel from passenger disembarking area and parking area to accessible entrance	✓		
Disembarking area at accessible entrance	✓		
Surface evenly paved or hard-packed	✓		
No ponding of water	✓		
Path of Travel			
Path does not require the use of stairs	✓		Front of building has no ramp
Path is stable, firm and slip resistant	✓		
3 ft wide minimum	✓		
Slope maximum 1:20 (5%) and maximum cross pitch is 2% (1:50).	✓		
Continuous common surface, no changes in level greater than 1/2 inch	✓		
Any objects protruding onto the pathway must be detected by a person with a visual disability using a cane	✓		
Objects protruding more than 4" from the wall must be within 27" of the ground, or higher than 80"	N/A		
Curb on the pathway must have curb cuts at drives, parking and drop-offs			
Entrances			
Primary public entrances accessible to person using wheelchair, must be signed, gotten to independently, and <i>not</i> be the service entrance			
Level space extending 5 ft. from the door, interior and exterior of entrance doors			
Minimum 32" clear width opening (i.e. 36" door with standard hinge)			
At least 18" clear floor area on latch, pull side of door			
Door handle no higher than 48" and operable with a closed fist			
Vestibule is 4 ft plus the width of the door swinging into the space			
Entrance(s) on a level that makes elevators accessible			
Door mats less than 1/2" thick are securely fastened			
Door mats more than 1/2" thick are recessed			
Grates in path of travel have openings of 1/2" maximum			
Signs at non-accessible entrance(s) indicate direction to accessible entrance			
Emergency egress – alarms with flashing lights and audible signals, sufficiently lighted			

Notes

Location

STAIRS and DOORS			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Stairs			
No open risers			
Nosings not projecting			
Treads no less than 11" wide			
Handrails on both sides			
Handrails 34"-38" above tread			
Handrail extends a minimum of 1 ft beyond top and bottom riser (if no safety hazard and space permits)			
Handgrip oval or round			
Handgrip has a smooth surface			
Handgrip diameter between 1¼" and 1½"			
1½" clearance between wall and handrail			
Doors			
Minimum 32" clear opening			
At least 18" clear floor space on pull side of door			
Closing speed minimum 3 seconds to within 3" of the latch			
Maximum pressure 5 pounds interior doors			
Threshold maximum ½" high, beveled on both sides			
Hardware operable with a closed fist (no conventional door knobs or thumb latch devices)			
Hardware minimum 36", maximum 48" above the floor			
Clear, level floor space extends out 5 ft from both sides of the door			
Door adjacent to revolving door is accessible and unlocked			
Doors opening into hazardous area have hardware that is knurled or roughened			

Notes

Location

RESTROOMS – also see Doors and Vestibules			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
5 ft turning space measured 12" from the floor			
At least one Sink:			
Clear floor space of 30" by 48" to allow a forward approach			
Mounted without pedestal or legs, height 34" to top of rim			
Extends at least 22" from the wall			
Open knee space a minimum 19" deep, 30" width, and 27" high			
Cover exposed pipes with insulation			
Faucets operable with closed fist (lever or spring activated handle)			
At least one Stall:			
Accessible to person using wheelchair at 60" wide by 72" deep			
Stall door is 36" wide			
Stall door swings out			
Stall door is self closing			
Stall door has a pull latch			
Lock on stall door is operable with a closed fist, and 32" above the floor			
Coat hook is 54" high			
Toilet			
18" from center to nearest side wall			
42" minimum clear space from center to farthest wall or fixture			
Top of seat 17"-19" above the floor			
Grab Bars			
On back and side wall closest to toilet			
1½" diameter			
1½" clearance to wall			
Located 30" above and parallel to the floor			
Acid-etched or roughened surface			
42" long			
Fixtures			
Toilet paper dispenser is 24" above floor			
One mirror set a maximum 38" to bottom (if tilted, 42")			
Dispensers (towel, soap, etc) at least one of each a maximum 42" above the floor			

Notes

Location

FLOORS, DRINKING FOUNTAINS, TELEPHONES			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Floors			
Non-slip surface			
Carpeting is high-density, low pile, non-absorbent, stretched taut, securely anchored			
Corridor width minimum is 3 ft			
Objects (signs, ceiling lights, fixtures) can only protrude 4" into the path of travel from a height of 27" to 80" above the floor			
Drinking Fountains			
Spouts no higher than 36" from floor to outlet			
Hand operated push button or level controls			
Spouts located near front with stream of water as parallel to front as possible			
If recessed, recess a minimum 30" width, and no deeper than depth of fountain			
If no clear knee space underneath, clear floor space 30" x 48" to allow parallel approach			
Telephones			
Highest operating part a maximum 54" above the floor			
Access within 12" of phone, 30" high by 30" wide			
Adjustable volume control on headset so identified			
SIGNS, SIGNALS, AND SWITCHES			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Switches, Controls and Signs			
Switches and controls for light, heat, ventilation, windows, fire alarms, thermostats, etc, must be a minimum of 36" and a maximum of 48" above the floor for a forward reach, a maximum of 54" for a side reach			
Electrical outlets centered no lower than 18" above the floor			
Warning signals must be visual as well as audible			
Signs			
Mounting height must be 60" to centerline of the sign			
Within 18" of door jamb or recessed			
Letters and numbers a t least 1¼" high			
Letters and numbers raised .03"			
Letters and numbers contrast with the background color			

Notes

Location

SWIMMING POOLS – accessibility can be via ramp, lifting device, or transfer area			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Ramp at least 34" wide with a non-slip surface extending into the shallow end, slope not exceeding 1:6 with handrails on both sides			
Lifting device			
Transfer area 18" above the path of travel and a minimum of 18" wide			
Unobstructed path of travel not less than 48" wide around pool			
Non-slip surface			

Location

SHOWER ROOMS - Showers must accommodate both wheel-in and transfer use			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Stalls 36" by 60" minimum, with a 36" door opening			
Floors are pitched to drain the stall at the corner farthest from entrance			
Floors are non-slip surface			
Controls operate by a single lever with a pressure balance mixing valve			
Controls are located on the center wall adjacent to the hinged seat			
Shower heads attached to a flexible metal hose			
Shower heads attached to wall mounting adjustable from 42" to 72" above the floor			
Seat is hinged and padded and at least 16" deep, folds upward, securely attached to side wall, height is 18" to the top of the seat, and at least 24" long			
Soap trays without handhold features unless they can support 250 pounds			
2 grab bars are provided, one 30" and one 48" long, or one continuous L shaped bar			
Grab bars are placed horizontally at 36" above the floor line			

Location

PICNICKING			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
A minimum of 5% of the total tables must be accessible with clear space under the table top not less than 30" wide and 19" deep per seating space and not less than 27" clear from the ground to the underside of the table. An additional 29" clear space (totaling 48") must extend beyond the 19" clear space under the table to provide access			
For tables without toe clearance, the knee space under the table must be at least 28" high, 30" wide and 24" deep.			
Top of table no higher than 32" above ground			
Surface of the clear ground space under and around the table must be stable, firm and slip-resistant, and evenly graded with a maximum slope of 2% in all directions			
Accessible tables, grills and fire rings must have clear ground space of at least 36" around the perimeter			

Facility Inventory

Location:

Whitmore Playground

ACTIVITY	EQUIPMENT	NOTES
Picnic Facilities <i>N/A</i>	Tables & Benches	Located adjacent to accessible paths
		Access to Open Spaces
		Back and Arm Rests
		Adequate number
	Grills	Height of Cooking Surface Located adjacent to accessible paths
Trash Cans		Located adjacent to accessible paths
	Picnic Shelters	Located adjacent to accessible paths Located near accessible water fountains, trash can, restroom, parking, etc.
Trails <i>N/A</i>		Surface material
		Dimensions
		Rails
		Signage (for visually impaired)
Swimming Facilities <i>N/A</i>	Pools	Entrance
		Location from accessible parking
		Safety features i.e. warning for visually impaired
	Beaches	Location from accessible path into water
		Handrails
Location from accessible parking Shade provided		
Play Areas (tot lots)	All Play Equipment i.e. swings, slides	Same experience provided to all <i>no</i>
	Access Routes	Located adjacent to accessible paths <i>no</i> Enough space between equipment for wheelchair <i>yes</i>
Game Areas: *ballfield *basketball *tennis	Access Routes	Located adjacent to accessible paths <i>tennis court - yes; baseball + basketball needs improvement</i>
		Berm cuts onto courts <i>yes</i>
	Equipment	Height
		Dimensions
Spectator Seating <i>yes for baseball field</i>		
Boat Docks <i>N/A</i>	Access Routes	Located adjacent to accessible paths
		Handrails
Fishing Facilities <i>N/A</i>	Access Routes	Located adjacent to accessible paths
		Handrails
	Equipment	Arm Rests
		Bait Shelves
		Handrails
Programming <i>N/A</i>	Are special programs at your facilities accessible?	Learn-to-Swim
		Guided Hikes
		Interpretive Programs
Services and Technical Assistance <i>N/A</i>		Information available in alternative formats i.e. for visually impaired
		Process to request interpretive services (i.e. sign language interpreter) for meetings

There are no handicap spaces. Access to playground needs improvement
Develop two spaces near playground / tennis court and one near basketball courts.

Location:

PARKING			
<i>Total Spaces</i>	<i>Required Accessible Spaces</i> None		
Up to 25	1 space		
26-50	2 spaces		
51-75	3 spaces		
76-100	4 spaces		
101-150	5 spaces		
151-200	6 spaces		
201-300	7 spaces		
301-400	8 spaces		
401-500	9 spaces		
<i>Specification for Accessible Spaces</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Accessible space located closest to accessible entrance		✓	
Where spaces cannot be located within 200 ft of accessible entrance, drop-off area is provided within 100 ft.		✓	
Minimum width of 13 ft includes 8 ft space plus 5 ft access aisle		✓	
Van space – minimum of 1 van space for every accessible space, 8 ft wide plus 8 ft aisle. Alternative is to make all accessible spaces 11 ft wide with 5 ft aisle.		✓	
Sign with international symbol of accessibility at each space or pair of spaces		✓	
Sign minimum 5 ft, maximum 8 ft to top of sign		✓	
Surface evenly paved or hard-packed (no cracks)	✓		yes around playground
Surface slope less than 1:20, 5%	✓		
Curbcut to pathway from parking lot at each space or pair of spaces, if sidewalk (curb) is present			
Curbcut is a minimum width of 3 ft, excluding sloped sides, has sloped sides, all slopes not to exceed 1:12, and textured or painted yellow			
RAMPS N/A			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Slope Maximum 1:12			
Minimum width 4 ft between handrails			
Handrails on both sides if ramp is longer than 6 ft			
Handrails at 34" and 19" from ramp surface			
Handrails extend 12" beyond top and bottom			
Handgrip oval or round			
Handgrip smooth surface			
Handgrip diameter between 1¼" and 2"			
Clearance of 1½" between wall and wall rail			
Non-slip surface			
Level platforms (4ft x 4 ft) at every 30 ft, at top, at bottom, at change of direction			

Notes

Location

SITE ACCESS, PATH OF TRAVEL, ENTRANCES			
Specification	Yes	No	Comments/Transition Notes
Site Access			
Accessible path of travel from passenger disembarking area and parking area to accessible entrance	✓		For playground
Disembarking area at accessible entrance	✓	✓	
Surface evenly paved or hard-packed	✓		
No ponding of water	✓		
Path of Travel			
Path does not require the use of stairs	✓		
Path is stable, firm and slip resistant		✓	Sand around playground
3 ft wide minimum	✓		
Slope maximum 1:20 (5%) and maximum cross pitch is 2% (1:50).	✓		
Continuous common surface, no changes in level greater than 1/2 inch		✓	
Any objects protruding onto the pathway must be detected by a person with a visual disability using a cane	✓		
Objects protruding more than 4" from the wall must be within 27" of the ground, or higher than 80"			N/A
Curb on the pathway must have curb cuts at drives, parking and drop-offs			
Entrances N/A			
Primary public entrances accessible to person using wheelchair, must be signed, gotten to independently, and <i>not</i> be the service entrance			
Level space extending 5 ft. from the door, interior and exterior of entrance doors			
Minimum 32" clear width opening (i.e. 36" door with standard hinge)			
At least 18" clear floor area on latch, pull side of door			
Door handle no higher than 48" and operable with a closed fist			
Vestibule is 4 ft plus the width of the door swinging into the space			
Entrance(s) on a level that makes elevators accessible			
Door mats less than 1/2" thick are securely fastened			
Door mats more than 1/2" thick are recessed			
Grates in path of travel have openings of 1/2" maximum			
Signs at non-accessible entrance(s) indicate direction to accessible entrance			
Emergency egress – alarms with flashing lights and audible signals, sufficiently lighted			

Notes

Location

STAIRS and DOORS

N/A

Specification	Yes	No	Comments/Transition Notes
Stairs			
No open risers			
Nosings not projecting			
Treads no less than 11" wide			
Handrails on both sides			
Handrails 34"-38" above tread			
Handrail extends a minimum of 1 ft beyond top and bottom riser (if no safety hazard and space permits)			
Handgrip oval or round			
Handgrip has a smooth surface			
Handgrip diameter between 1¼" and 1½"			
1½" clearance between wall and handrail			
Doors			
Minimum 32" clear opening			
At least 18" clear floor space on pull side of door			
Closing speed minimum 3 seconds to within 3" of the latch			
Maximum pressure 5 pounds interior doors			
Threshold maximum ½" high, beveled on both sides			
Hardware operable with a closed fist (no conventional door knobs or thumb latch devices)			
Hardware minimum 36", maximum 48" above the floor			
Clear, level floor space extends out 5 ft from both sides of the door			
Door adjacent to revolving door is accessible and unlocked			
Doors opening into hazardous area have hardware that is knurled or roughened			

Notes

Location

RESTROOMS – also see Doors and Vestibules NIA			
Specification	Yes	No	Comments/Transition Notes
5 ft turning space measured 12" from the floor			
At least one Sink:			
Clear floor space of 30" by 48" to allow a forward approach			
Mounted without pedestal or legs, height 34" to top of rim			
Extends at least 22" from the wall			
Open knee space a minimum 19" deep, 30" width, and 27" high			
Cover exposed pipes with insulation			
Faucets operable with closed fist (lever or spring activated handle)			
At least one Stall:			
Accessible to person using wheelchair at 60" wide by 72" deep			
Stall door is 36" wide			
Stall door swings out			
Stall door is self closing			
Stall door has a pull latch			
Lock on stall door is operable with a closed fist, and 32" above the floor			
Coat hook is 54" high			
Toilet			
18" from center to nearest side wall			
42" minimum clear space from center to farthest wall or fixture			
Top of seat 17"-19" above the floor			
Grab Bars			
On back and side wall closest to toilet			
1½" diameter			
1½" clearance to wall			
Located 30" above and parallel to the floor			
Acid-etched or roughened surface			
42" long			
Fixtures			
Toilet paper dispenser is 24" above floor			
One mirror set a maximum 38" to bottom (if tilted, 42")			
Dispensers (towel, soap, etc) at least one of each a maximum 42" above the floor			

Notes

Location

FLOORS, DRINKING FOUNTAINS, TELEPHONES NA			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Floors			
Non-slip surface			
Carpeting is high-density, low pile, non-absorbent, stretched taut, securely anchored			
Corridor width minimum is 3 ft			
Objects (signs, ceiling lights, fixtures) can only protrude 4" into the path of travel from a height of 27" to 80" above the floor			
Drinking Fountains			
Spouts no higher than 36" from floor to outlet			
Hand operated push button or level controls			
Spouts located near front with stream of water as parallel to front as possible			
If recessed, recess a minimum 30" width, and no deeper than depth of fountain			
If no clear knee space underneath, clear floor space 30" x 48" to allow parallel approach			
Telephones			
Highest operating part a maximum 54" above the floor			
Access within 12" of phone, 30" high by 30" wide			
Adjustable volume control on headset so identified			
SIGNS, SIGNALS, AND SWITCHES			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Switches, Controls and Signs			
Switches and controls for light, heat, ventilation, windows, fire alarms, thermostats, etc, must be a minimum of 36" and a maximum of 48" above the floor for a forward reach, a maximum of 54" for a side reach			
Electrical outlets centered no lower than 18" above the floor			
Warning signals must be visual as well as audible			
Signs			
Mounting height must be 60" to centerline of the sign			
Within 18" of door jamb or recessed			
Letters and numbers a t least 1¼" high			
Letters and numbers raised .03"			
Letters and numbers contrast with the background color			

Notes

Location

N/A

SWIMMING POOLS – accessibility can be via ramp, lifting device, or transfer area			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Ramp at least 34" wide with a non-slip surface extending into the shallow end, slope not exceeding 1:6 with handrails on both sides			
Lifting device			
Transfer area 18" above the path of travel and a minimum of 18" wide			
Unobstructed path of travel not less than 48" wide around pool			
Non-slip surface			

Location

N/A

SHOWER ROOMS - Showers must accommodate both wheel-in and transfer use			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Stalls 36" by 60" minimum, with a 36" door opening			
Floors are pitched to drain the stall at the corner farthest from entrance			
Floors are non-slip surface			
Controls operate by a single lever with a pressure balance mixing valve			
Controls are located on the center wall adjacent to the hinged seat			
Shower heads attached to a flexible metal hose			
Shower heads attached to wall mounting adjustable from 42" to 72" above the floor			
Seat is hinged and padded and at least 16" deep, folds upward, securely attached to side wall, height is 18" to the top of the seat, and at least 24" long			
Soap trays without handhold features unless they can support 250 pounds			
2 grab bars are provided, one 30" and one 48" long, or one continuous L shaped bar			
Grab bars are placed horizontally at 36" above the floor line			

Location

N/A

PICNICKING			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
A minimum of 5% of the total tables must be accessible with clear space under the table top not less than 30" wide and 19" deep per seating space and not less than 27" clear from the ground to the underside of the table. An additional 29" clear space (totaling 48") must extend beyond the 19" clear space under the table to provide access			
For tables without toe clearance, the knee space under the table must be at least 28" high, 30" wide and 24" deep.			
Top of table no higher than 32" above ground			
Surface of the clear ground space under and around the table must be stable, firm and slip-resistant, and evenly graded with a maximum slope of 2% in all directions			
Accessible tables, grills and fire rings must have clear ground space of at least 36" around the perimeter			

MONK'S Pk Public Trails
(Bay Vista Conservation Area)

Location: Valley Park Rd and Shore Rd

Facility Inventory

ACTIVITY	EQUIPMENT	NOTES
Picnic Facilities	Tables & Benches	Located adjacent to accessible paths
		Access to Open Spaces
	Grills	Back and Arm Rests
		Adequate number
	Trash Cans	Height of Cooking Surface
Picnic Shelters	Located adjacent to accessible paths	
	Located near accessible water fountains, trash can, restroom, parking, etc.	
Trails		Surface material <i>Dirt</i>
		Dimensions <i>2-3'</i>
		Rails <i>no</i>
		Signage (for visually impaired) <i>no</i>
Swimming Facilities	Pools	Entrance
		Location from accessible parking
		Safety features i.e. warning for visually impaired
	<u>Beaches</u>	Location from accessible path into water <i>no 100' away</i>
		Handrails <i>no</i>
		Location from accessible parking <i>100' away</i>
Play Areas (tot lots)	All Play Equipment i.e. swings, slides	Shade provided <i>no</i>
	Access Routes	Same experience provided to all
Game Areas: *ballfield *basketball *tennis	Access Routes	Located adjacent to accessible paths
		Enough space between equipment for wheelchair
	Equipment	Berm cuts onto courts
		Height
Boat Docks	Access Routes	Dimensions
		Spectator Seating
Fishing Facilities	Access Routes	Located adjacent to accessible paths
		Handrails
	Equipment	Arm Rests
		Bait Shelves
		Handrails
		Fish Cleaning Tables
		Learn-to-Swim
Programming	Are special programs at your facilities accessible?	Guided Hikes
		Interpretive Programs
Services and Technical Assistance	Information available in alternative formats i.e. for visually impaired	
	Process to request interpretive services (i.e. sign language interpreter) for meetings	

Location:

PARKING		<i>None</i>		
<i>Total Spaces</i>	<i>2 Spaces</i>	<i>Required Accessible Spaces</i>		
Up to 25		1 space		
26-50		2 spaces		
51-75		3 spaces		
76-100		4 spaces		
101-150		5 spaces		
151-200		6 spaces		
201-300		7 spaces		
301-400		8 spaces		
401-500		9 spaces		
<i>Specification for Accessible Spaces</i>	<i>N/A</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Accessible space located closest to accessible entrance				
Where spaces cannot be located within 200 ft of accessible entrance, drop-off area is provided within 100 ft.				
Minimum width of 13 ft includes 8 ft space plus 5 ft access aisle				
Van space – minimum of 1 van space for every accessible space, 8 ft wide plus 8 ft aisle. Alternative is to make all accessible spaces 11 ft wide with 5 ft aisle.				
Sign with international symbol of accessibility at each space or pair of spaces				
Sign minimum 5 ft, maximum 8 ft to top of sign				
Surface evenly paved or hard-packed (no cracks)				
Surface slope less than 1:20, 5%				
Curbcut to pathway from parking lot at each space or pair of spaces, if sidewalk (curb) is present				
Curbcut is a minimum width of 3 ft, excluding sloped sides, has sloped sides, all slopes not to exceed 1:12, and textured or painted yellow				
RAMPS				
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>	
Slope Maximum 1:12				
Minimum width 4 ft between handrails				
Handrails on both sides if ramp is longer than 6 ft				
Handrails at 34" and 19" from ramp surface				
Handrails extend 12" beyond top and bottom				
Handgrip oval or round				
Handgrip smooth surface				
Handgrip diameter between 1¼" and 2"				
Clearance of 1½" between wall and wall rail				
Non-slip surface				
Level platforms (4ft x 4 ft) at every 30 ft, at top, at bottom, at change of direction				

Notes

Location

SITE ACCESS, PATH OF TRAVEL, ENTRANCES			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Site Access			
Accessible path of travel from passenger disembarking area and parking area to accessible entrance		X	
Disembarking area at accessible entrance		X	
Surface evenly paved or hard-packed	X		
No ponding of water	X		
Path of Travel			
Path does not require the use of stairs	X		
Path is stable, firm and slip resistant	X		
3 ft wide minimum	X		
Slope maximum 1:20 (5%) and maximum cross pitch is 2% (1:50).	X		
Continuous common surface, no changes in level greater than 1/2 inch	X		
Any objects protruding onto the pathway must be detected by a person with a visual disability using a cane	X		
Objects protruding more than 4" from the wall must be within 27" of the ground, or higher than 80"	X		
Curb on the pathway must have curb cuts at drives, parking and drop-offs		X	
Entrances			
Primary public entrances accessible to person using wheelchair, must be signed, gotten to independently, and <i>not</i> be the service entrance			
Level space extending 5 ft. from the door, interior and exterior of entrance doors			
Minimum 32" clear width opening (i.e. 36" door with standard hinge)			
At least 18" clear floor area on latch, pull side of door			
Door handle no higher than 48" and operable with a closed fist			
Vestibule is 4 ft plus the width of the door swinging into the space			
Entrance(s) on a level that makes elevators accessible			
Door mats less than 1/2" thick are securely fastened			
Door mats more than 1/2" thick are recessed			
Grates in path of travel have openings of 1/2" maximum			
Signs at non-accessible entrance(s) indicate direction to accessible entrance			
Emergency egress – alarms with flashing lights and audible signals, sufficiently lighted			

Notes

Location **NIA**

STAIRS and DOORS

Specification	Yes	No	Comments/Transition Notes
Stairs			
No open risers			
Nosings not projecting			
Treads no less than 11" wide			
Handrails on both sides			
Handrails 34"-38" above tread			
Handrail extends a minimum of 1 ft beyond top and bottom riser (if no safety hazard and space permits)			
Handgrip oval or round			
Handgrip has a smooth surface			
Handgrip diameter between 1¼" and 1½"			
1½" clearance between wall and handrail			
Doors			
Minimum 32" clear opening			
At least 18" clear floor space on pull side of door			
Closing speed minimum 3 seconds to within 3" of the latch			
Maximum pressure 5 pounds interior doors			
Threshold maximum ½" high, beveled on both sides			
Hardware operable with a closed fist (no conventional door knobs or thumb latch devices)			
Hardware minimum 36", maximum 48" above the floor			
Clear, level floor space extends out 5 ft from both sides of the door			
Door adjacent to revolving door is accessible and unlocked			
Doors opening into hazardous area have hardware that is knurled or roughened			

Notes

Location **NIA**

RESTROOMS – also see Doors and Vestibules			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
5 ft turning space measured 12" from the floor			
At least one Sink:			
Clear floor space of 30" by 48" to allow a forward approach			
Mounted without pedestal or legs, height 34" to top of rim			
Extends at least 22" from the wall			
Open knee space a minimum 19" deep, 30" width, and 27" high			
Cover exposed pipes with insulation			
Faucets operable with closed fist (lever or spring activated handle)			
At least one Stall:			
Accessible to person using wheelchair at 60" wide by 72" deep			
Stall door is 36" wide			
Stall door swings out			
Stall door is self closing			
Stall door has a pull latch			
Lock on stall door is operable with a closed fist, and 32" above the floor			
Coat hook is 54" high			
Toilet			
18" from center to nearest side wall			
42" minimum clear space from center to farthest wall or fixture			
Top of seat 17"-19" above the floor			
Grab Bars			
On back and side wall closest to toilet			
1½" diameter			
1½" clearance to wall			
Located 30" above and parallel to the floor			
Acid-etched or roughened surface			
42" long			
Fixtures			
Toilet paper dispenser is 24" above floor			
One mirror set a maximum 38" to bottom (if tilted, 42")			
Dispensers (towel, soap, etc) at least one of each a maximum 42" above the floor			

Notes

Location **NIA**

FLOORS, DRINKING FOUNTAINS, TELEPHONES			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Floors			
Non-slip surface			
Carpeting is high-density, low pile, non-absorbent, stretched taut, securely anchored			
Corridor width minimum is 3 ft			
Objects (signs, ceiling lights, fixtures) can only protrude 4" into the path of travel from a height of 27" to 80" above the floor			
Drinking Fountains			
Spouts no higher than 36" from floor to outlet			
Hand operated push button or level controls			
Spouts located near front with stream of water as parallel to front as possible			
If recessed, recess a minimum 30" width, and no deeper than depth of fountain			
If no clear knee space underneath, clear floor space 30" x 48" to allow parallel approach			
Telephones			
Highest operating part a maximum 54" above the floor			
Access within 12" of phone, 30" high by 30" wide			
Adjustable volume control on headset so identified			
SIGNS, SIGNALS, AND SWITCHES			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Switches, Controls and Signs			
Switches and controls for light, heat, ventilation, windows, fire alarms, thermostats, etc, must be a minimum of 36" and a maximum of 48" above the floor for a forward reach, a maximum of 54" for a side reach			
Electrical outlets centered no lower than 18" above the floor			
Warning signals must be visual as well as audible			
Signs			
Mounting height must be 60" to centerline of the sign			
Within 18" of door jamb or recessed			
Letters and numbers a t least 1¼" high			
Letters and numbers raised .03"			
Letters and numbers contrast with the background color			

Notes

Location **NIA**

SWIMMING POOLS – accessibility can be via ramp, lifting device, or transfer area			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Ramp at least 34" wide with a non-slip surface extending into the shallow end, slope not exceeding 1:6 with handrails on both sides			
Lifting device			
Transfer area 18" above the path of travel and a minimum of 18" wide			
Unobstructed path of travel not less than 48" wide around pool			
Non-slip surface			

Location **NIA**

SHOWER ROOMS - Showers must accommodate both wheel-in and transfer use			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Stalls 36" by 60" minimum, with a 36" door opening			
Floors are pitched to drain the stall at the corner farthest from entrance			
Floors are non-slip surface			
Controls operate by a single lever with a pressure balance mixing valve			
Controls are located on the center wall adjacent to the hinged seat			
Shower heads attached to a flexible metal hose			
Shower heads attached to wall mounting adjustable from 42" to 72" above the floor			
Seat is hinged and padded and at least 16" deep, folds upward, securely attached to side wall, height is 18" to the top of the seat, and at least 24" long			
Soap trays without handhold features unless they can support 250 pounds			
2 grab bars are provided, one 30" and one 48" long, or one continuous L shaped bar			
Grab bars are placed horizontally at 36" above the floor line			

Location **NIA**

PICNICKING			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
A minimum of 5% of the total tables must be accessible with clear space under the table top not less than 30" wide and 19" deep per seating space and not less than 27" clear from the ground to the underside of the table. An additional 29" clear space (totaling 48") must extend beyond the 19" clear space under the table to provide access			
For tables without toe clearance, the knee space under the table must be at least 28" high, 30" wide and 24" deep.			
Top of table no higher than 32" above ground			
Surface of the clear ground space under and around the table must be stable, firm and slip-resistant, and evenly graded with a maximum slope of 2% in all directions			
Accessible tables, grills and fire rings must have clear ground space of at least 36" around the perimeter			

Facility Inventory

Location:

Canal Crossings Path / Inclusive Playground

ACTIVITY	EQUIPMENT	NOTES
Picnic Facilities	Tables & Benches	Located adjacent to accessible paths <i>Yes</i>
		Access to Open Spaces <i>Yes</i>
		Back and Arm Rests <i>Yes</i>
		Adequate number <i>Yes</i>
	Grills <i>N/A</i>	Height of Cooking Surface
	Trash Cans	Located adjacent to accessible paths <i>Yes</i>
Picnic Shelters <i>N/A</i>		Located adjacent to accessible paths
		Located near accessible water fountains, trash can, restroom, parking, etc.
Trails		Surface material <i>Paved / packed gravel</i>
		Dimensions <i>4'</i>
		Rails <i>NO</i>
		Signage (for visually impaired) <i>NO</i>
Swimming Facilities	Pools <i>N/A</i>	Entrance
		Location from accessible parking
		Safety features i.e. warning for visually impaired
	Beaches <i>N/A</i>	Location from accessible path into water
		Handrails
		Location from accessible parking
Play Areas (tot lots)	All Play Equipment i.e. swings, slides	Same experience provided to all <i>Yes</i>
	Access Routes	Located adjacent to accessible paths <i>Yes</i>
		Enough space between equipment for wheelchair <i>Yes</i>
Game Areas: *ballfield *basketball *tennis	Access Routes <i>N/A</i>	Located adjacent to accessible paths
		Berm cuts onto courts
	Equipment <i>N/A</i>	Height
		Dimensions
		Spectator Seating
Boat Docks	Access Routes <i>N/A</i>	Located adjacent to accessible paths
		Handrails
Fishing Facilities	Access Routes <i>N/A</i>	Located adjacent to accessible paths
		Handrails
	Equipment <i>N/A</i>	Arm Rests
		Bait Shelves
		Handrails
		Fish Cleaning Tables
Programming	Are special programs at your facilities accessible? <i>N/A</i>	Learn-to-Swim
		Guided Hikes
		Interpretive Programs
Services and Technical Assistance <i>N/A</i>		Information available in alternative formats i.e. for visually impaired
		Process to request interpretive services (i.e. sign language interpreter) for meetings

Location:

PARKING			
<i>Total Spaces</i>	<i>Required Accessible Spaces</i>		
Up to 25	1 space		
26-50	2 spaces		
51-75	3 spaces		
76-100	4 spaces		
101-150	5 spaces		
151-200	6 spaces		
201-300	7 spaces		
301-400	8 spaces		
401-500	9 spaces		
<i>Specification for Accessible Spaces</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Accessible space located closest to accessible entrance	✓		
Where spaces cannot be located within 200 ft of accessible entrance, drop-off area is provided within 100 ft.	✓		
Minimum width of 13 ft includes 8 ft space plus 5 ft access aisle	✓		
Van space – minimum of 1 van space for every accessible space, 8 ft wide plus 8 ft aisle. Alternative is to make all accessible spaces 11 ft wide with 5 ft aisle.	✓		
Sign with international symbol of accessibility at each space or pair of spaces	✓		
Sign minimum 5 ft, maximum 8 ft to top of sign		✓	Sign is needed
Surface evenly paved or hard-packed (no cracks)	✓		
Surface slope less than 1:20, 5%	✓		
Curbcut to pathway from parking lot at each space or pair of spaces, if sidewalk (curb) is present		N/A	
Curbcut is a minimum width of 3 ft, excluding sloped sides, has sloped sides, all slopes not to exceed 1:12, and textured or painted yellow		N/A	
RAMPS			
			N/A
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Slope Maximum 1:12			
Minimum width 4 ft between handrails			
Handrails on both sides if ramp is longer than 6 ft			
Handrails at 34" and 19" from ramp surface			
Handrails extend 12" beyond top and bottom			
Handgrip oval or round			
Handgrip smooth surface			
Handgrip diameter between 1 1/4" and 2"			
Clearance of 1 1/2" between wall and wall rail			
Non-slip surface			
Level platforms (4ft x 4 ft) at every 30 ft, at top, at bottom, at change of direction			

Notes

Location

SITE ACCESS, PATH OF TRAVEL, ENTRANCES			
Specification	Yes	No	Comments/Transition Notes
Site Access			
Accessible path of travel from passenger disembarking area and parking area to accessible entrance	✓		
Disembarking area at accessible entrance	✓		
Surface evenly paved or hard-packed	✓		
No ponding of water	✓		
Path of Travel			
Path does not require the use of stairs	✓		
Path is stable, firm and slip resistant	✓		
3 ft wide minimum	✓		
Slope maximum 1:20 (5%) and maximum cross pitch is 2% (1:50).	✓		
Continuous common surface, no changes in level greater than ½ inch	✓		
Any objects protruding onto the pathway must be detected by a person with a visual disability using a cane	✓		
Objects protruding more than 4" from the wall must be within 27" of the ground, or higher than 80"	N/A		
Curb on the pathway must have curb cuts at drives, parking and drop-offs	N/A		
Entrances N/A			
Primary public entrances accessible to person using wheelchair, must be signed, gotten to independently, and <i>not</i> be the service entrance			
Level space extending 5 ft. from the door, interior and exterior of entrance doors			
Minimum 32" clear width opening (i.e. 36" door with standard hinge)			
At least 18" clear floor area on latch, pull side of door			
Door handle no higher than 48" and operable with a closed fist			
Vestibule is 4 ft plus the width of the door swinging into the space			
Entrance(s) on a level that makes elevators accessible			
Door mats less than ½" thick are securely fastened			
Door mats more than ½" thick are recessed			
Grates in path of travel have openings of ½" maximum			
Signs at non-accessible entrance(s) indicate direction to accessible entrance			
Emergency egress – alarms with flashing lights and audible signals, sufficiently lighted			

Notes

Location

STAIRS and DOORS

N/A

Specification	Yes	No	Comments/Transition Notes
Stairs			
No open risers			
Nosings not projecting			
Treads no less than 11" wide			
Handrails on both sides			
Handrails 34"-38" above tread			
Handrail extends a minimum of 1 ft beyond top and bottom riser (if no safety hazard and space permits)			
Handgrip oval or round			
Handgrip has a smooth surface			
Handgrip diameter between 1¼" and 1½"			
1½" clearance between wall and handrail			
Doors			
Minimum 32" clear opening			
At least 18" clear floor space on pull side of door			
Closing speed minimum 3 seconds to within 3" of the latch			
Maximum pressure 5 pounds interior doors			
Threshold maximum ½" high, beveled on both sides			
Hardware operable with a closed fist (no conventional door knobs or thumb latch devices)			
Hardware minimum 36", maximum 48" above the floor			
Clear, level floor space extends out 5 ft from both sides of the door			
Door adjacent to revolving door is accessible and unlocked			
Doors opening into hazardous area have hardware that is knurled or roughened			

Notes

Location

N/A

RESTROOMS – also see Doors and Vestibules			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
5 ft turning space measured 12" from the floor			
At least one Sink:			
Clear floor space of 30" by 48" to allow a forward approach			
Mounted without pedestal or legs, height 34" to top of rim			
Extends at least 22" from the wall			
Open knee space a minimum 19" deep, 30" width, and 27" high			
Cover exposed pipes with insulation			
Faucets operable with closed fist (lever or spring activated handle)			
At least one Stall:			
Accessible to person using wheelchair at 60" wide by 72" deep			
Stall door is 36" wide			
Stall door swings out			
Stall door is self closing			
Stall door has a pull latch			
Lock on stall door is operable with a closed fist, and 32" above the floor			
Coat hook is 54" high			
Toilet			
18" from center to nearest side wall			
42" minimum clear space from center to farthest wall or fixture			
Top of seat 17"-19" above the floor			
Grab Bars			
On back and side wall closest to toilet			
1½" diameter			
1½" clearance to wall			
Located 30" above and parallel to the floor			
Acid-etched or roughened surface			
42" long			
Fixtures			
Toilet paper dispenser is 24" above floor			
One mirror set a maximum 38" to bottom (if tilted, 42")			
Dispensers (towel, soap, etc) at least one of each a maximum 42" above the floor			

Notes

Location

FLOORS, DRINKING FOUNTAINS, TELEPHONES

N/A

<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Floors			
Non-slip surface			
Carpeting is high-density, low pile, non-absorbent, stretched taut, securely anchored			
Corridor width minimum is 3 ft			
Objects (signs, ceiling lights, fixtures) can only protrude 4" into the path of travel from a height of 27" to 80" above the floor			
Drinking Fountains			
Spouts no higher than 36" from floor to outlet			
Hand operated push button or level controls			
Spouts located near front with stream of water as parallel to front as possible			
If recessed, recess a minimum 30" width, and no deeper than depth of fountain			
If no clear knee space underneath, clear floor space 30" x 48" to allow parallel approach			
Telephones			
Highest operating part a maximum 54" above the floor			
Access within 12" of phone, 30" high by 30" wide			
Adjustable volume control on headset so identified			
SIGNS, SIGNALS, AND SWITCHES			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Switches, Controls and Signs			
Switches and controls for light, heat, ventilation, windows, fire alarms, thermostats, etc, must be a minimum of 36" and a maximum of 48" above the floor for a forward reach, a maximum of 54" for a side reach			
Electrical outlets centered no lower than 18" above the floor			
Warning signals must be visual as well as audible			
Signs			
Mounting height must be 60" to centerline of the sign			
Within 18" of door jamb or recessed			
Letters and numbers at least 1/4" high			
Letters and numbers raised .03"			
Letters and numbers contrast with the background color			

Notes

Location **N/A**

SWIMMING POOLS – accessibility can be via ramp, lifting device, or transfer area			
<i>Specification</i>	Yes	No	<i>Comments/Transition Notes</i>
Ramp at least 34" wide with a non-slip surface extending into the shallow end, slope not exceeding 1:6 with handrails on both sides			
Lifting device			
Transfer area 18" above the path of travel and a minimum of 18" wide			
Unobstructed path of travel not less than 48" wide around pool			
Non-slip surface			

Location **N/A**

SHOWER ROOMS - Showers must accommodate both wheel-in and transfer use			
<i>Specification</i>	Yes	No	<i>Comments/Transition Notes</i>
Stalls 36" by 60" minimum, with a 36" door opening			
Floors are pitched to drain the stall at the corner farthest from entrance			
Floors are non-slip surface			
Controls operate by a single lever with a pressure balance mixing valve			
Controls are located on the center wall adjacent to the hinged seat			
Shower heads attached to a flexible metal hose			
Shower heads attached to wall mounting adjustable from 42" to 72" above the floor			
Seat is hinged and padded and at least 16" deep, folds upward, securely attached to side wall, height is 18" to the top of the seat, and at least 24" long			
Soap trays without handhold features unless they can support 250 pounds			
2 grab bars are provided, one 30" and one 48" long, or one continuous L shaped bar			
Grab bars are placed horizontally at 36" above the floor line			

Location **N/A**

PICNICKING			
<i>Specification</i>	Yes	No	<i>Comments/Transition Notes</i>
A minimum of 5% of the total tables must be accessible with clear space under the table top not less than 30" wide and 19" deep per seating space and not less than 27" clear from the ground to the underside of the table. An additional 29" clear space (totaling 48") must extend beyond the 19" clear space under the table to provide access			
For tables without toe clearance, the knee space under the table must be at least 28" high, 30" wide and 24" deep.			
Top of table no higher than 32" above ground			
Surface of the clear ground space under and around the table must be stable, firm and slip-resistant, and evenly graded with a maximum slope of 2% in all directions			
Accessible tables, grills and fire rings must have clear ground space of at least 36" around the perimeter			

Facility Inventory

Location: *Bourne Community Building*

ACTIVITY	EQUIPMENT	NOTES
Picnic Facilities	Tables & Benches	Located adjacent to accessible paths <i>No for picnic benches</i>
		Access to Open Spaces <i>Yes</i>
		Back and Arm Rests <i>no</i>
		Adequate number <i>no</i>
	Grills <i>NIA</i>	Height of Cooking Surface
	Trash Cans <i>NIA</i>	Located adjacent to accessible paths
	Picnic Shelters <i>NIA</i>	Located adjacent to accessible paths
Trails <i>NIA</i>		Located near accessible water fountains, trash can, restroom, parking, etc.
		Surface material
		Dimensions
		Rails
Swimming Facilities <i>NIA</i>	Pools	Signage (for visually impaired)
		Entrance
		Location from accessible parking
	Beaches	Safety features i.e. warning for visually impaired
		Location from accessible path into water
		Handrails
Play Areas (tot lots)	All Play Equipment i.e. swings, slides	Location from accessible parking
		Shade provided
	Access Routes	Same experience provided to all <i>no</i>
Game Areas: *ballfield *basketball *tennis	Access Routes	Located adjacent to accessible paths <i>no</i>
		Enough space between equipment for wheelchair <i>no</i>
	Equipment	Located adjacent to accessible paths <i>Yes for basketball and one baseball field</i>
		Berm cuts onto courts <i>yes</i>
Boat Docks <i>NIA</i>	Access Routes	Height
		Dimensions
Fishing Facilities <i>NIA</i>	Access Routes	Spectator Seating
		Located adjacent to accessible paths
	Equipment	Handrails
		Arm Rests
		Bait Shelves
Programming <i>NIA</i>	Are special programs at your facilities accessible?	Handrails
		Fish Cleaning Tables
		Learn-to-Swim
Services and Technical Assistance <i>NIA</i>		Guided Hikes
		Interpretive Programs
Services and Technical Assistance <i>NIA</i>		Information available in alternative formats i.e. for visually impaired
		Process to request interpretive services (i.e. sign language interpreter) for meetings

Location:

PARKING			
<i>Total Spaces</i>	<i>Required Accessible Spaces</i>		
Up to 25	1 space		
26-50	2 spaces		
51-75	3 spaces		
76-100	4 spaces		
101-150	5 spaces		
151-200	6 spaces		
201-300	7 spaces		
301-400	8 spaces		
401-500	9 spaces		
<i>Specification for Accessible Spaces</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Accessible space located closest to accessible entrance	✓		
Where spaces cannot be located within 200 ft of accessible entrance, drop-off area is provided within 100 ft.			
Minimum width of 13 ft includes 8 ft space plus 5 ft access aisle	✓		
Van space – minimum of 1 van space for every accessible space, 8 ft wide plus 8 ft aisle. Alternative is to make all accessible spaces 11 ft wide with 5 ft aisle.	✓		
Sign with international symbol of accessibility at each space or pair of spaces	✓		
Sign minimum 5 ft, maximum 8 ft to top of sign	✓		
Surface evenly paved or hard-packed (no cracks)	✓		
Surface slope less than 1:20, 5%	✓		
Curbscut to pathway from parking lot at each space or pair of spaces, if sidewalk (curb) is present	✓		
Curbscut is a minimum width of 3 ft, excluding sloped sides, has sloped sides, all slopes not to exceed 1:12, and textured or painted yellow	✓		
RAMPS NIA			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Slope Maximum 1:12			
Minimum width 4 ft between handrails			
Handrails on both sides if ramp is longer than 6 ft			
Handrails at 34" and 19" from ramp surface			
Handrails extend 12" beyond top and bottom			
Handgrip oval or round			
Handgrip smooth surface			
Handgrip diameter between 1¼" and 2"			
Clearance of 1½" between wall and wall rail			
Non-slip surface			
Level platforms (4ft x 4 ft) at every 30 ft, at top, at bottom, at change of direction			

Notes

Building uses electric doors for easy access.

Location

SITE ACCESS, PATH OF TRAVEL, ENTRANCES			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Site Access			
Accessible path of travel from passenger disembarking area and parking area to accessible entrance	✓		
Disembarking area at accessible entrance	✓		
Surface evenly paved or hard-packed	✓		
No ponding of water	✓		
Path of Travel			
Path does not require the use of stairs	✓		
Path is stable, firm and slip resistant	✓		
3 ft wide minimum	✓		
Slope maximum 1:20 (5%) and maximum cross pitch is 2% (1:50).	✓		
Continuous common surface, no changes in level greater than 1/2 inch	✓		
Any objects protruding onto the pathway must be detected by a person with a visual disability using a cane	✓		
Objects protruding more than 4" from the wall must be within 27" of the ground, or higher than 80"	✓		
Curb on the pathway must have curb cuts at drives, parking and drop-offs	✓		
Entrances			
Primary public entrances accessible to person using wheelchair, must be signed, gotten to independently, and <i>not</i> be the service entrance	✓		
Level space extending 5 ft. from the door, interior and exterior of entrance doors	✓		
Minimum 32" clear width opening (i.e. 36" door with standard hinge)	✓		
At least 18" clear floor area on latch, pull side of door	✓		
Door handle no higher than 48" and operable with a closed fist	✓		
Vestibule is 4 ft plus the width of the door swinging into the space	✓		
Entrance(s) on a level that makes elevators accessible	✓		
Door mats less than 1/2" thick are securely fastened	✓		
Door mats more than 1/2" thick are recessed	✓		
Grates in path of travel have openings of 1/2" maximum	✓		
Signs at non-accessible entrance(s) indicate direction to accessible entrance			
Emergency egress – alarms with flashing lights and audible signals, sufficiently lighted			

Notes

All doors are accessible.

Location

STAIRS and DOORS

N/A

<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Stairs			
No open risers			
Nosings not projecting			
Treads no less than 11" wide			
Handrails on both sides			
Handrails 34"-38" above tread			
Handrail extends a minimum of 1 ft beyond top and bottom riser (if no safety hazard and space permits)			
Handgrip oval or round			
Handgrip has a smooth surface			
Handgrip diameter between 1¼" and 1½"			
1½" clearance between wall and handrail			
Doors			
Minimum 32" clear opening			
At least 18" clear floor space on pull side of door			
Closing speed minimum 3 seconds to within 3" of the latch			
Maximum pressure 5 pounds interior doors			
Threshold maximum ½" high, beveled on both sides			
Hardware operable with a closed fist (no conventional door knobs or thumb latch devices)			
Hardware minimum 36", maximum 48" above the floor			
Clear, level floor space extends out 5 ft from both sides of the door			
Door adjacent to revolving door is accessible and unlocked			
Doors opening into hazardous area have hardware that is knurled or roughened			

Notes

Location

RESTROOMS – also see Doors and Vestibules			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
5 ft turning space measured 12" from the floor	✓		
At least one Sink:			
Clear floor space of 30" by 48" to allow a forward approach	✓		
Mounted without pedestal or legs, height 34" to top of rim	✓		
Extends at least 22" from the wall	✓		
Open knee space a minimum 19" deep, 30" width, and 27" high	✓		
Cover exposed pipes with insulation	✓		
Faucets operable with closed fist (lever or spring activated handle)	✓		
At least one Stall:			
Accessible to person using wheelchair at 60" wide by 72" deep	✓		
Stall door is 36" wide	✓		
Stall door swings out		✓	
Stall door is self closing	✓		
Stall door has a pull latch		✓	
Lock on stall door is operable with a closed fist, and 32" above the floor	✓		
Coat hook is 54" high	✓		
Toilet			
18" from center to nearest side wall	✓		
42" minimum clear space from center to farthest wall or fixture	✓		
Top of seat 17"-19" above the floor	✓		
Grab Bars			
On back and side wall closest to toilet	✓		
1¼" diameter	✓		
1½" clearance to wall	✓		
Located 30" above and parallel to the floor	✓		
Acid-etched or roughened surface	✓		
42" long	✓		
Fixtures			
Toilet paper dispenser is 24" above floor	✓		
One mirror set a maximum 38" to bottom (if tilted, 42")	✓		
Dispensers (towel, soap, etc) at least one of each a maximum 42" above the floor	✓		

Notes

Location

FLOORS, DRINKING FOUNTAINS, TELEPHONES			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Floors			
Non-slip surface	✓		
Carpeting is high-density, low pile, non-absorbent, stretched taut, securely anchored	✓		
Corridor width minimum is 3 ft	✓		
Objects (signs, ceiling lights, fixtures) can only protrude 4" into the path of travel from a height of 27" to 80" above the floor	✓		
Drinking Fountains			
Spouts no higher than 36" from floor to outlet	✓		
Hand operated push button or level controls	✓		
Spouts located near front with stream of water as parallel to front as possible	✓		
If recessed, recess a minimum 30" width, and no deeper than depth of fountain	✓		
If no clear knee space underneath, clear floor space 30" x 48" to allow parallel approach	✓		
Telephones N/A			
Highest operating part a maximum 54" above the floor			
Access within 12" of phone, 30" high by 30" wide			
Adjustable volume control on headset so identified			
SIGNS, SIGNALS, AND SWITCHES			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Switches, Controls and Signs			
Switches and controls for light, heat, ventilation, windows, fire alarms, thermostats, etc, must be a minimum of 36" and a maximum of 48" above the floor for a forward reach, a maximum of 54" for a side reach	✓		
Electrical outlets centered no lower than 18" above the floor	✓		
Warning signals must be visual as well as audible			N/A
Signs			
Mounting height must be 60" to centerline of the sign	✓		
Within 18" of door jamb or recessed	✓		
Letters and numbers a t least 1¼" high		✓	less than 1"
Letters and numbers raised .03"	✓		
Letters and numbers contrast with the background color	✓		

Notes

Location **NIA**

SWIMMING POOLS – accessibility can be via ramp, lifting device, or transfer area			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Ramp at least 34" wide with a non-slip surface extending into the shallow end, slope not exceeding 1:6 with handrails on both sides			
Lifting device			
Transfer area 18" above the path of travel and a minimum of 18" wide			
Unobstructed path of travel not less than 48" wide around pool			
Non-slip surface			

Location **NIA**

SHOWER ROOMS - Showers must accommodate both wheel-in and transfer use			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Stalls 36" by 60" minimum, with a 36" door opening			
Floors are pitched to drain the stall at the corner farthest from entrance			
Floors are non-slip surface			
Controls operate by a single lever with a pressure balance mixing valve			
Controls are located on the center wall adjacent to the hinged seat			
Shower heads attached to a flexible metal hose			
Shower heads attached to wall mounting adjustable from 42" to 72" above the floor			
Seat is hinged and padded and at least 16" deep, folds upward, securely attached to side wall, height is 18" to the top of the seat, and at least 24" long			
Soap trays without handhold features unless they can support 250 pounds			
2 grab bars are provided, one 30" and one 48" long, or one continuous L shaped bar			
Grab bars are placed horizontally at 36" above the floor line			

Location **NIA**

PICNICKING			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
A minimum of 5% of the total tables must be accessible with clear space under the table top not less than 30" wide and 19" deep per seating space and not less than 27" clear from the ground to the underside of the table. An additional 29" clear space (totaling 48") must extend beyond the 19" clear space under the table to provide access			
For tables without toe clearance, the knee space under the table must be at least 28" high, 30" wide and 24" deep.			
Top of table no higher than 32" above ground			
Surface of the clear ground space under and around the table must be stable, firm and slip-resistant, and evenly graded with a maximum slope of 2% in all directions			
Accessible tables, grills and fire rings must have clear ground space of at least 36" around the perimeter			

Bourne Public Library Recreation Fields
Perry Ave

Facility Inventory

Location:

ACTIVITY	EQUIPMENT	NOTES
Picnic Facilities	Tables & Benches	Located adjacent to accessible paths <i>No</i>
		Access to Open Spaces <i>No</i>
		Back and Arm Rests <i>No</i>
		Adequate number
	Grills <i>NIA</i>	Height of Cooking Surface
	Trash Cans <i>NIA</i>	Located adjacent to accessible paths
		Picnic Shelters <i>NIA</i>
Trails <i>NIA</i>		Located near accessible water fountains, trash can, restroom, parking, etc.
		Surface material
		Dimensions
		Rails
Swimming Facilities <i>NIA</i>	Pools	Signage (for visually impaired)
		Entrance
		Location from accessible parking
	Beaches	Safety features i.e. warning for visually impaired
		Location from accessible path into water
		Handrails
		Location from accessible parking
Play Areas (tot lots) <i>NIA</i>	All Play Equipment i.e. swings, slides	Shade provided
		Same experience provided to all
Game Areas: *ballfield *basketball *tennis	Access Routes	Located adjacent to accessible paths
		Enough space between equipment for wheelchair
	Equipment	Located adjacent to accessible paths <i>No</i>
		Berm cuts onto courts <i>No</i>
		Height
Boat Docks <i>NIA</i>	Access Routes	Dimensions
		Spectator Seating
Fishing Facilities <i>NIA</i>	Access Routes	Located adjacent to accessible paths
		Handrails
	Equipment	Arm Rests
		Bait Shelves
		Handrails
		Fish Cleaning Tables
Programming <i>NIA</i>	Are special programs at your facilities accessible?	Learn-to-Swim
		Guided Hikes
		Interpretive Programs
Services and Technical Assistance <i>NIA</i>		Located adjacent to accessible paths
		Process to request interpretive services (i.e. sign language interpreter) for meetings

Location:

PARKING		<i>None</i>	
<i>Total Spaces</i>	<i>Required Accessible Spaces</i>		
<u>Up to 25</u>	1 space		
26-50	2 spaces		
51-75	3 spaces		
76-100	4 spaces		
101-150	5 spaces		
151-200	6 spaces		
201-300	7 spaces		
301-400	8 spaces		
401-500	9 spaces		
<i>Specification for Accessible Spaces</i>	Yes	No	<i>Comments/Transition Notes</i>
Accessible space located closest to accessible entrance		X	
Where spaces cannot be located within 200 ft of accessible entrance, drop-off area is provided within 100 ft.		X	
Minimum width of 13 ft includes 8 ft space plus 5 ft access aisle		X	
Van space – minimum of 1 van space for every accessible space, 8 ft wide plus 8 ft aisle. Alternative is to make all accessible spaces 11 ft wide with 5 ft aisle.		X	
Sign with international symbol of accessibility at each space or pair of spaces		X	
Sign minimum 5 ft, maximum 8 ft to top of sign		X	
Surface evenly paved or hard-packed (no cracks)		X	
Surface slope less than 1:20, 5%		X	
Curbscut to pathway from parking lot at each space or pair of spaces, if sidewalk (curb) is present		X	NIA
Curbscut is a minimum width of 3 ft, excluding sloped sides, has sloped sides, all slopes not to exceed 1:12, and textured or painted yellow		X	NIA
RAMPS <i>NIA</i>			
<i>Specification</i>	Yes	No	<i>Comments/Transition Notes</i>
Slope Maximum 1:12			
Minimum width 4 ft between handrails			
Handrails on both sides if ramp is longer than 6 ft			
Handrails at 34" and 19" from ramp surface			
Handrails extend 12" beyond top and bottom			
Handgrip oval or round			
Handgrip smooth surface			
Handgrip diameter between 1¼" and 2"			
Clearance of 1½" between wall and wall rail			
Non-slip surface			
Level platforms (4ft x 4 ft) at every 30 ft, at top, at bottom, at change of direction			

Notes

Location

SITE ACCESS, PATH OF TRAVEL, ENTRANCES			
Specification	Yes	No	Comments/Transition Notes
Site Access			
Accessible path of travel from passenger disembarking area and parking area to accessible entrance		X	
Disembarking area at accessible entrance		X	
Surface evenly paved or hard-packed		X	rough gravel
No ponding of water	X		
Path of Travel			
Path does not require the use of stairs	X		
Path is stable, firm and slip resistant		X	
3 ft wide minimum	X		
Slope maximum 1:20 (5%) and maximum cross pitch is 2% (1:50).		X	
Continuous common surface, no changes in level greater than 1/4 inch	X		
Any objects protruding onto the pathway must be detected by a person with a visual disability using a cane	X		
Objects protruding more than 4" from the wall must be within 27" of the ground, or higher than 80"	X		
Curb on the pathway must have curb cuts at drives, parking and drop-offs	X		
Entrances			
Primary public entrances accessible to person using wheelchair, must be signed, gotten to independently, and <i>not</i> be the service entrance			
Level space extending 5 ft. from the door, interior and exterior of entrance doors			
Minimum 32" clear width opening (i.e. 36" door with standard hinge)			
At least 18" clear floor area on latch, pull side of door			
Door handle no higher than 48" and operable with a closed fist			
Vestibule is 4 ft plus the width of the door swinging into the space			
Entrance(s) on a level that makes elevators accessible			
Door mats less than 1/2" thick are securely fastened			
Door mats more than 1/2" thick are recessed			
Grates in path of travel have openings of 1/2" maximum			
Signs at non-accessible entrance(s) indicate direction to accessible entrance			
Emergency egress – alarms with flashing lights and audible signals, sufficiently lighted			

Notes

Location

STAIRS and DOORS

N/A

<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Stairs			
No open risers			
Nosings not projecting			
Treads no less than 11" wide			
Handrails on both sides			
Handrails 34"-38" above tread			
Handrail extends a minimum of 1 ft beyond top and bottom riser (if no safety hazard and space permits)			
Handgrip oval or round			
Handgrip has a smooth surface			
Handgrip diameter between 1¼" and 1½"			
1½" clearance between wall and handrail			
Doors			
Minimum 32" clear opening			
At least 18" clear floor space on pull side of door			
Closing speed minimum 3 seconds to within 3" of the latch			
Maximum pressure 5 pounds interior doors			
Threshold maximum ½" high, beveled on both sides			
Hardware operable with a closed fist (no conventional door knobs or thumb latch devices)			
Hardware minimum 36", maximum 48" above the floor			
Clear, level floor space extends out 5 ft from both sides of the door			
Door adjacent to revolving door is accessible and unlocked			
Doors opening into hazardous area have hardware that is knurled or roughened			

Notes

Location

NIA

RESTROOMS – also see Doors and Vestibules			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
5 ft turning space measured 12" from the floor			
At least one Sink:			
Clear floor space of 30" by 48" to allow a forward approach			
Mounted without pedestal or legs, height 34" to top of rim			
Extends at least 22" from the wall			
Open knee space a minimum 19" deep, 30" width, and 27" high			
Cover exposed pipes with insulation			
Faucets operable with closed fist (lever or spring activated handle)			
At least one Stall:			
Accessible to person using wheelchair at 60" wide by 72" deep			
Stall door is 36" wide			
Stall door swings out			
Stall door is self closing			
Stall door has a pull latch			
Lock on stall door is operable with a closed fist, and 32" above the floor			
Coat hook is 54" high			
Toilet			
18" from center to nearest side wall			
42" minimum clear space from center to farthest wall or fixture			
Top of seat 17"-19" above the floor			
Grab Bars			
On back and side wall closest to toilet			
1½" diameter			
1½" clearance to wall			
Located 30" above and parallel to the floor			
Acid-etched or roughened surface			
42" long			
Fixtures			
Toilet paper dispenser is 24" above floor			
One mirror set a maximum 38" to bottom (if tilted, 42")			
Dispensers (towel, soap, etc) at least one of each a maximum 42" above the floor			

Notes

Location

FLOORS, DRINKING FOUNTAINS, TELEPHONES

N/A

<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Floors			
Non-slip surface			
Carpeting is high-density, low pile, non-absorbent, stretched taut, securely anchored			
Corridor width minimum is 3 ft			
Objects (signs, ceiling lights, fixtures) can only protrude 4" into the path of travel from a height of 27" to 80" above the floor			
Drinking Fountains			
Spouts no higher than 36" from floor to outlet			
Hand operated push button or level controls			
Spouts located near front with stream of water as parallel to front as possible			
If recessed, recess a minimum 30" width, and no deeper than depth of fountain			
If no clear knee space underneath, clear floor space 30" x 48" to allow parallel approach			
Telephones			
Highest operating part a maximum 54" above the floor			
Access within 12" of phone, 30" high by 30" wide			
Adjustable volume control on headset so identified			
SIGNS, SIGNALS, AND SWITCHES			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Switches, Controls and Signs			
Switches and controls for light, heat, ventilation, windows, fire alarms, thermostats, etc, must be a minimum of 36" and a maximum of 48" above the floor for a forward reach, a maximum of 54" for a side reach			
Electrical outlets centered no lower than 18" above the floor			
Warning signals must be visual as well as audible			
Signs			
Mounting height must be 60" to centerline of the sign			
Within 18" of door jamb or recessed			
Letters and numbers at least 1/4" high			
Letters and numbers raised .03"			
Letters and numbers contrast with the background color			

Notes

Location

NIA

SWIMMING POOLS – accessibility can be via ramp, lifting device, or transfer area			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Ramp at least 34" wide with a non-slip surface extending into the shallow end, slope not exceeding 1:6 with handrails on both sides			
Lifting device			
Transfer area 18" above the path of travel and a minimum of 18" wide			
Unobstructed path of travel not less than 48" wide around pool			
Non-slip surface			

Location

NIA

SHOWER ROOMS - Showers must accommodate both wheel-in and transfer use			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Stalls 36" by 60" minimum, with a 36" door opening			
Floors are pitched to drain the stall at the corner farthest from entrance			
Floors are non-slip surface			
Controls operate by a single lever with a pressure balance mixing valve			
Controls are located on the center wall adjacent to the hinged seat			
Shower heads attached to a flexible metal hose			
Shower heads attached to wall mounting adjustable from 42" to 72" above the floor			
Seat is hinged and padded and at least 16" deep, folds upward, securely attached to side wall, height is 18" to the top of the seat, and at least 24" long			
Soap trays without handhold features unless they can support 250 pounds			
2 grab bars are provided, one 30" and one 48" long, or one continuous L shaped bar			
Grab bars are placed horizontally at 36" above the floor line			

Location

NIA

PICNICKING			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
A minimum of 5% of the total tables must be accessible with clear space under the table top not less than 30" wide and 19" deep per seating space and not less than 27" clear from the ground to the underside of the table. An additional 29" clear space (totaling 48") must extend beyond the 19" clear space under the table to provide access			
For tables without toe clearance, the knee space under the table must be at least 28" high, 30" wide and 24" deep.			
Top of table no higher than 32" above ground			
Surface of the clear ground space under and around the table must be stable, firm and slip-resistant, and evenly graded with a maximum slope of 2% in all directions			
Accessible tables, grills and fire rings must have clear ground space of at least 36" around the perimeter			

Facility Inventory

Location: Bourne Scenic Park - Office Building

ACTIVITY	EQUIPMENT	NOTES
Picnic Facilities	Tables & Benches	Located adjacent to accessible paths
		Access to Open Spaces
		Back and Arm Rests
	Grills	Adequate number
		Height of Cooking Surface
	Trash Cans	Located adjacent to accessible paths
Picnic Shelters	Located adjacent to accessible paths	
	Located near accessible water fountains, trash can, restroom, parking, etc.	
Trails		Surface material
		Dimensions
		Rails
		Signage (for visually impaired)
Swimming Facilities	Pools	Entrance
		Location from accessible parking
		Safety features i.e. warning for visually impaired
	Beaches	Location from accessible path into water
		Handrails
		Location from accessible parking
Play Areas (tot lots)	All Play Equipment i.e. swings, slides	Shade provided
		Same experience provided to all
		Access Routes
Game Areas: *ballfield *basketball *tennis	Access Routes	Located adjacent to accessible paths
		Enough space between equipment for wheelchair
	Equipment	Berm cuts onto courts
		Height
		Dimensions
		Spectator Seating
Boat Docks	Access Routes	Located adjacent to accessible paths
		Handrails
Fishing Facilities	Access Routes	Located adjacent to accessible paths
		Handrails
	Equipment	Arm Rests
		Bait Shelves
		Handrails
		Fish Cleaning Tables
Programming	Are special programs at your facilities accessible?	Learn-to-Swim
		Guided Hikes
		Interpretive Programs
Services and Technical Assistance		Information available in alternative formats i.e. for visually impaired
		Process to request interpretive services (i.e. sign language interpreter) for meetings

Location:

PARKING			
<i>Total Spaces</i>	<i>Required Accessible Spaces</i>		
Up to 25	1 space		
26-50	2 spaces		
51-75	3 spaces		
76-100	4 spaces		
101-150	5 spaces		
151-200	6 spaces		
201-300	7 spaces		
301-400	8 spaces		
401-500	9 spaces		
<i>Specification for Accessible Spaces</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Accessible space located closest to accessible entrance	✓		
Where spaces cannot be located within 200 ft of accessible entrance, drop-off area is provided within 100 ft.	✓		
Minimum width of 13 ft includes 8 ft space plus 5 ft access aisle	✓		
Van space – minimum of 1 van space for every accessible space, 8 ft wide plus 8 ft aisle. Alternative is to make all accessible spaces 11 ft wide with 5 ft aisle.	✓		
Sign with international symbol of accessibility at each space or pair of spaces	✓		
Sign minimum 5 ft, maximum 8 ft to top of sign	✓		
Surface evenly paved or hard-packed (no cracks)	✓		
Surface slope less than 1:20, 5%	✓		
Curbcut to pathway from parking lot at each space or pair of spaces, if sidewalk (curb) is present	✓		
Curbcut is a minimum width of 3 ft, excluding sloped sides, has sloped sides, all slopes not to exceed 1:12, and textured or painted yellow	✓		
RAMPS			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Slope Maximum 1:12	✓		
Minimum width 4 ft between handrails		✓	3'
Handrails on both sides if ramp is longer than 6 ft	✓		
Handrails at 34" and 19" from ramp surface		✓	23" and 36"
Handrails extend 12" beyond top and bottom	✓		
Handgrip oval or round	✓		
Handgrip smooth surface	✓		
Handgrip diameter between 1¼" and 2"	✓		
Clearance of 1½" between wall and wall rail	✓		
Non-slip surface	✓		
Level platforms (4ft x 4 ft) at every 30 ft, at top, at bottom, at change of direction	✓		

Notes

Location

SITE ACCESS, PATH OF TRAVEL, ENTRANCES			
Specification	Yes	No	Comments/Transition Notes
Site Access			
Accessible path of travel from passenger disembarking area and parking area to accessible entrance	✓		
Disembarking area at accessible entrance	✓		
Surface evenly paved or hard-packed	✓		
No ponding of water	✓		
Path of Travel			
Path does not require the use of stairs	✓		
Path is stable, firm and slip resistant	✓		
3 ft wide minimum	✓		
Slope maximum 1:20 (5%) and maximum cross pitch is 2% (1:50).	✓		
Continuous common surface, no changes in level greater than ½ inch	✓		
Any objects protruding onto the pathway must be detected by a person with a visual disability using a cane	✓		
Objects protruding more than 4" from the wall must be within 27" of the ground, or higher than 80"	✓		
Curb on the pathway must have curb cuts at drives, parking and drop-offs	✓		
Entrances			
Primary public entrances accessible to person using wheelchair, must be signed, gotten to independently, and <i>not</i> be the service entrance	✓		
Level space extending 5 ft. from the door, interior and exterior of entrance doors	✓		
Minimum 32" clear width opening (i.e. 36" door with standard hinge)	✓		
At least 18" clear floor area on latch, pull side of door	✓		
Door handle no higher than 48" and operable with a closed fist	✓		
Vestibule is 4 ft plus the width of the door swinging into the space	✓		
Entrance(s) on a level that makes elevators accessible	✓		
Door mats less than ½" thick are securely fastened	✓		
Door mats more than ½" thick are recessed	✓		
Grates in path of travel have openings of ½" maximum			N/A
Signs at non-accessible entrance(s) indicate direction to accessible entrance			N/A
Emergency egress – alarms with flashing lights and audible signals, sufficiently lighted			N/A

Notes

Location

STAIRS and DOORS

N/A

Specification	Yes	No	Comments/Transition Notes
Stairs			
No open risers			
Nosings not projecting			
Treads no less than 11" wide			
Handrails on both sides			
Handrails 34"-38" above tread			
Handrail extends a minimum of 1 ft beyond top and bottom riser (if no safety hazard and space permits)			
Handgrip oval or round			
Handgrip has a smooth surface			
Handgrip diameter between 1¼" and 1½"			
1½" clearance between wall and handrail			
Doors			
Minimum 32" clear opening			
At least 18" clear floor space on pull side of door			
Closing speed minimum 3 seconds to within 3" of the latch			
Maximum pressure 5 pounds interior doors			
Threshold maximum ½" high, beveled on both sides			
Hardware operable with a closed fist (no conventional door knobs or thumb latch devices)			
Hardware minimum 36", maximum 48" above the floor			
Clear, level floor space extends out 5 ft from both sides of the door			
Door adjacent to revolving door is accessible and unlocked			
Doors opening into hazardous area have hardware that is knurled or roughened			

Notes

Location **NIA**

RESTROOMS – also see Doors and Vestibules			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
5 ft turning space measured 12" from the floor			
At least one Sink:			
Clear floor space of 30" by 48" to allow a forward approach			
Mounted without pedestal or legs, height 34" to top of rim			
Extends at least 22" from the wall			
Open knee space a minimum 19" deep, 30" width, and 27" high			
Cover exposed pipes with insulation			
Faucets operable with closed fist (lever or spring activated handle)			
At least one Stall:			
Accessible to person using wheelchair at 60" wide by 72" deep			
Stall door is 36" wide			
Stall door swings out			
Stall door is self closing			
Stall door has a pull latch			
Lock on stall door is operable with a closed fist, and 32" above the floor			
Coat hook is 54" high			
Toilet			
18" from center to nearest side wall			
42" minimum clear space from center to farthest wall or fixture			
Top of seat 17"-19" above the floor			
Grab Bars			
On back and side wall closest to toilet			
1½" diameter			
1½" clearance to wall			
Located 30" above and parallel to the floor			
Acid-etched or roughened surface			
42" long			
Fixtures			
Toilet paper dispenser is 24" above floor			
One mirror set a maximum 38" to bottom (if tilted, 42")			
Dispensers (towel, soap, etc) at least one of each a maximum 42" above the floor			

Notes

Location

FLOORS, DRINKING FOUNTAINS, TELEPHONES

N/A

<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Floors			
Non-slip surface			
Carpeting is high-density, low pile, non-absorbent, stretched taut, securely anchored			
Corridor width minimum is 3 ft			
Objects (signs, ceiling lights, fixtures) can only protrude 4" into the path of travel from a height of 27" to 80" above the floor			
Drinking Fountains			
Spouts no higher than 36" from floor to outlet			
Hand operated push button or level controls			
Spouts located near front with stream of water as parallel to front as possible			
If recessed, recess a minimum 30" width, and no deeper than depth of fountain			
If no clear knee space underneath, clear floor space 30" x 48" to allow parallel approach			
Telephones			
Highest operating part a maximum 54" above the floor			
Access within 12" of phone, 30" high by 30" wide			
Adjustable volume control on headset so identified			
SIGNS, SIGNALS, AND SWITCHES			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Switches, Controls and Signs			
Switches and controls for light, heat, ventilation, windows, fire alarms, thermostats, etc, must be a minimum of 36" and a maximum of 48" above the floor for a forward reach, a maximum of 54" for a side reach			
Electrical outlets centered no lower than 18" above the floor			
Warning signals must be visual as well as audible			
Signs			
Mounting height must be 60" to centerline of the sign			
Within 18" of door jamb or recessed			
Letters and numbers at least 1/4" high			
Letters and numbers raised .03"			
Letters and numbers contrast with the background color			

Notes

Location **N/A**

SWIMMING POOLS – accessibility can be via ramp, lifting device, or transfer area			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Ramp at least 34" wide with a non-slip surface extending into the shallow end, slope not exceeding 1:6 with handrails on both sides			
Lifting device			
Transfer area 18" above the path of travel and a minimum of 18" wide			
Unobstructed path of travel not less than 48" wide around pool			
Non-slip surface			

Location **N/A**

SHOWER ROOMS - Showers must accommodate both wheel-in and transfer use			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Stalls 36" by 60" minimum, with a 36" door opening			
Floors are pitched to drain the stall at the corner farthest from entrance			
Floors are non-slip surface			
Controls operate by a single lever with a pressure balance mixing valve			
Controls are located on the center wall adjacent to the hinged seat			
Shower heads attached to a flexible metal hose			
Shower heads attached to wall mounting adjustable from 42" to 72" above the floor			
Seat is hinged and padded and at least 16" deep, folds upward, securely attached to side wall, height is 18" to the top of the seat, and at least 24" long			
Soap trays without handhold features unless they can support 250 pounds			
2 grab bars are provided, one 30" and one 48" long, or one continuous L shaped bar			
Grab bars are placed horizontally at 36" above the floor line			

Location **N/A**

PICNICKING			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
A minimum of 5% of the total tables must be accessible with clear space under the table top not less than 30" wide and 19" deep per seating space and not less than 27" clear from the ground to the underside of the table. An additional 29" clear space (totaling 48") must extend beyond the 19" clear space under the table to provide access			
For tables without toe clearance, the knee space under the table must be at least 28" high, 30" wide and 24" deep.			
Top of table no higher than 32" above ground			
Surface of the clear ground space under and around the table must be stable, firm and slip-resistant, and evenly graded with a maximum slope of 2% in all directions			
Accessible tables, grills and fire rings must have clear ground space of at least 36" around the perimeter			

Bozeman Scenic Park - Bathrooms

Facility Inventory		Location:
ACTIVITY	EQUIPMENT	NOTES
Picnic Facilities	Tables & Benches	Located adjacent to accessible paths
		Access to Open Spaces
		Back and Arm Rests
	Grills	Adequate number
		Height of Cooking Surface
Trash Cans	Located adjacent to accessible paths	
Picnic Shelters	Located adjacent to accessible paths	
	Located near accessible water fountains, trash can, restroom, parking, etc.	
Trails		Surface material
		Dimensions
		Rails
		Signage (for visually impaired)
Swimming Facilities	Pools	Entrance
		Location from accessible parking
		Safety features i.e. warning for visually impaired
	Beaches	Location from accessible path into water
		Handrails
		Location from accessible parking
Play Areas (tot lots)	All Play Equipment i.e. swings, slides	Shade provided
	Access Routes	Same experience provided to all
Game Areas: *ballfield *basketball *tennis	Access Routes	Located adjacent to accessible paths
		Enough space between equipment for wheelchair
	Equipment	Berm cuts onto courts
		Height
		Dimensions
Boat Docks	Access Routes	Spectator Seating
		Located adjacent to accessible paths
Fishing Facilities	Access Routes	Handrails
		Located adjacent to accessible paths
	Equipment	Arm Rests
		Bait Shelves
		Handrails
Programming	Are special programs at your facilities accessible?	Fish Cleaning Tables
		Learn-to-Swim
		Guided Hikes
Services and Technical Assistance		Interpretive Programs
		Information available in alternative formats i.e. for visually impaired
		Process to request interpretive services (i.e. sign language interpreter) for meetings

Location: *Bathrooms at Borne Science Park*

PARKING			
Total Spaces	<i>3</i>	Required Accessible Spaces	
Up to 25		1 space	<i>None</i>
26-50		2 spaces	
51-75		3 spaces	
76-100		4 spaces	
101-150		5 spaces	
151-200		6 spaces	
201-300		7 spaces	
301-400		8 spaces	
401-500		9 spaces	
Specification for Accessible Spaces	Yes	No	Comments/Transition Notes
Accessible space located closest to accessible entrance		<i>X</i>	
Where spaces cannot be located within 200 ft of accessible entrance, drop-off area is provided within 100 ft.		<i>X</i>	
Minimum width of 13 ft includes 8 ft space plus 5 ft access aisle		<i>X</i>	
Van space – minimum of 1 van space for every accessible space, 8 ft wide plus 8 ft aisle. Alternative is to make all accessible spaces 11 ft wide with 5 ft aisle.		<i>X</i>	
Sign with international symbol of accessibility at each space or pair of spaces		<i>X</i>	
Sign minimum 5 ft, maximum 8 ft to top of sign		<i>X</i>	
Surface evenly paved or hard-packed (no cracks)		<i>X</i>	
Surface slope less than 1:20, 5%	<i>✓</i>		
Curbside to pathway from parking lot at each space or pair of spaces, if sidewalk (curb) is present	<i>✓</i>		
Curbside is a minimum width of 3 ft, excluding sloped sides, has sloped sides, all slopes not to exceed 1:12, and textured or painted yellow		<i>X</i>	
RAMPS			
Specification	Yes	No	Comments/Transition Notes
Slope Maximum 1:12			
Minimum width 4 ft between handrails			
Handrails on both sides if ramp is longer than 6 ft			
Handrails at 34" and 19" from ramp surface			
Handrails extend 12" beyond top and bottom			
Handgrip oval or round			
Handgrip smooth surface			
Handgrip diameter between 1¼" and 2"			
Clearance of 1½" between wall and wall rail			
Non-slip surface			
Level platforms (4ft x 4 ft) at every 30 ft, at top, at bottom, at change of direction			

Notes

Location

BOVINE SCENE PARK Bathrooms

SITE ACCESS, PATH OF TRAVEL, ENTRANCES			
Specification	Yes	No	Comments/Transition Notes
Site Access			
Accessible path of travel from passenger disembarking area and parking area to accessible entrance	✓		
Disembarking area at accessible entrance		X	
Surface evenly paved or hard-packed	✓		
No ponding of water	✓		
Path of Travel			
Path does not require the use of stairs	✓		
Path is stable, firm and slip resistant	✓		
3 ft wide minimum	✓		
Slope maximum 1:20 (5%) and maximum cross pitch is 2% (1:50).	✓		
Continuous common surface, no changes in level greater than 1/2 inch	✓		
Any objects protruding onto the pathway must be detected by a person with a visual disability using a cane	✓		
Objects protruding more than 4" from the wall must be within 27" of the ground, or higher than 80"	✓		
Curb on the pathway must have curb cuts at drives, parking and drop-offs	✓		
Entrances			
Primary public entrances accessible to person using wheelchair, must be signed, gotten to independently, and <i>not</i> be the service entrance	✓		
Level space extending 5 ft. from the door, interior and exterior of entrance doors			
Minimum 32" clear width opening (i.e. 36" door with standard hinge)			
At least 18" clear floor area on latch, pull side of door			
Door handle no higher than 48" and operable with a closed fist			
Vestibule is 4 ft plus the width of the door swinging into the space			
Entrance(s) on a level that makes elevators accessible			
Door mats less than 1/2" thick are securely fastened			
Door mats more than 1/2" thick are recessed			
Grates in path of travel have openings of 1/2" maximum			
Signs at non-accessible entrance(s) indicate direction to accessible entrance			
Emergency egress – alarms with flashing lights and audible signals, sufficiently lighted			

Notes

Location

STAIRS and DOORS			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Stairs			
No open risers			
Nosings not projecting			
Treads no less than 11" wide			
Handrails on both sides			
Handrails 34"-38" above tread			
Handrail extends a minimum of 1 ft beyond top and bottom riser (if no safety hazard and space permits)			
Handgrip oval or round			
Handgrip has a smooth surface			
Handgrip diameter between 1¼" and 1½"			
1½" clearance between wall and handrail			
Doors			
Minimum 32" clear opening			
At least 18" clear floor space on pull side of door			
Closing speed minimum 3 seconds to within 3" of the latch			
Maximum pressure 5 pounds interior doors			
Threshold maximum ½" high, beveled on both sides			
Hardware operable with a closed fist (no conventional door knobs or thumb latch devices)			
Hardware minimum 36", maximum 48" above the floor			
Clear, level floor space extends out 5 ft from both sides of the door			
Door adjacent to revolving door is accessible and unlocked			
Doors opening into hazardous area have hardware that is knurled or roughened			

Notes

Location

RESTROOMS – also see Doors and Vestibules			
<i>Specification</i>	Yes	No	<i>Comments/Transition Notes</i>
5 ft turning space measured 12" from the floor	✓		
At least one Sink:			
Clear floor space of 30" by 48" to allow a forward approach	✓		
Mounted without pedestal or legs, height 34" to top of rim	✓		
Extends at least 22" from the wall		✓	16"
Open knee space a minimum 19" deep, 30" width, and 27" high		✓	10"
Cover exposed pipes with insulation		✓	
Faucets operable with closed fist (lever or spring activated handle)	✓		
At least one Stall:			
Accessible to person using wheelchair at 60" wide by 72" deep		✓	
Stall door is 36" wide	✓		
Stall door swings out	✓		
Stall door is self closing		✓	
Stall door has a pull latch		✓	
Lock on stall door is operable with a closed fist, and 32" above the floor	✓		43" above floor
Coat hook is 54" high		✓	61" high
Toilet			
18" from center to nearest side wall	✓		
42" minimum clear space from center to farthest wall or fixture		✓	
Top of seat 17"-19" above the floor		✓	23"
Grab Bars			
On back and side wall closest to toilet	✓		
1½" diameter	✓		
1½" clearance to wall	✓		
Located 30" above and parallel to the floor		✓	36"
Acid-etched or roughened surface		✓	
42" long		✓	35"
Fixtures			
Toilet paper dispenser is 24" above floor		✓	31"
One mirror set a maximum 38" to bottom (if tilted, 42")		✓	53"
Dispensers (towel, soap, etc) at least one of each a maximum 42" above the floor		✓	

Notes

Location

FLOORS, DRINKING FOUNTAINS, TELEPHONES			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Floors			
Non-slip surface			
Carpeting is high-density, low pile, non-absorbent, stretched taut, securely anchored			
Corridor width minimum is 3 ft			
Objects (signs, ceiling lights, fixtures) can only protrude 4" into the path of travel from a height of 27" to 80" above the floor			
Drinking Fountains			
Spouts no higher than 36" from floor to outlet			
Hand operated push button or level controls			
Spouts located near front with stream of water as parallel to front as possible			
If recessed, recess a minimum 30" width, and no deeper than depth of fountain			
If no clear knee space underneath, clear floor space 30" x 48" to allow parallel approach			
Telephones			
Highest operating part a maximum 54" above the floor			
Access within 12" of phone, 30" high by 30" wide			
Adjustable volume control on headset so identified			
SIGNS, SIGNALS, AND SWITCHES			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Switches, Controls and Signs			
Switches and controls for light, heat, ventilation, windows, fire alarms, thermostats, etc, must be a minimum of 36" and a maximum of 48" above the floor for a forward reach, a maximum of 54" for a side reach			
Electrical outlets centered no lower than 18" above the floor			
Warning signals must be visual as well as audible			
Signs			
Mounting height must be 60" to centerline of the sign			
Within 18" of door jamb or recessed			
Letters and numbers a t least 1/4" high			
Letters and numbers raised .03"			
Letters and numbers contrast with the background color			

Notes

Location

SWIMMING POOLS – accessibility can be via ramp, lifting device, or transfer area			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Ramp at least 34" wide with a non-slip surface extending into the shallow end, slope not exceeding 1:6 with handrails on both sides			
Lifting device			
Transfer area 18" above the path of travel and a minimum of 18" wide			
Unobstructed path of travel not less than 48" wide around pool			
Non-slip surface			

Location

SHOWER ROOMS - Showers must accommodate both wheel-in and transfer use			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Stalls 36" by 60" minimum, with a 36" door opening	✓		
Floors are pitched to drain the stall at the corner farthest from entrance	✓		
Floors are non-slip surface	✓		
Controls operate by a single lever with a pressure balance mixing valve	✓		
Controls are located on the center wall adjacent to the hinged seat	✓		No hinged seat
Shower heads attached to a flexible metal hose		✓	
Shower heads attached to wall mounting adjustable from 42" to 72" above the floor		✓	
Seat is hinged and padded and at least 16" deep, folds upward, securely attached to side wall, height is 18" to the top of the seat, and at least 24" long		✓	
Soap trays without handhold features unless they can support 250 pounds		✓	
2 grab bars are provided, one 30" and one 48" long, or one continuous L shaped bar		✓	
Grab bars are placed horizontally at 36" above the floor line		✓	

Location

PICNICKING			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
A minimum of 5% of the total tables must be accessible with clear space under the table top not less than 30" wide and 19" deep per seating space and not less than 27" clear from the ground to the underside of the table. An additional 29" clear space (totaling 48") must extend beyond the 19" clear space under the table to provide access			
For tables without toe clearance, the knee space under the table must be at least 28" high, 30" wide and 24" deep.			
Top of table no higher than 32" above ground			
Surface of the clear ground space under and around the table must be stable, firm and slip-resistant, and evenly graded with a maximum slope of 2% in all directions			
Accessible tables, grills and fire rings must have clear ground space of at least 36" around the perimeter			

Boume Scenic Park Pool - BBall Playground

Facility Inventory		Location:
ACTIVITY	EQUIPMENT	NOTES
Picnic Facilities	Tables & Benches	Located adjacent to accessible paths
		Access to Open Spaces
		Back and Arm Rests
		Adequate number
	Grills	Height of Cooking Surface
	Trash Cans	Located adjacent to accessible paths
Picnic Shelters	Picnic Shelters	Located adjacent to accessible paths
		Located near accessible water fountains, trash can, restroom, parking, etc.
Trails		Surface material
		Dimensions
		Rails
		Signage (for visually impaired)
Swimming Facilities	Pools	Entrance
		Location from accessible parking
		Safety features i.e. warning for visually impaired
	Beaches	Location from accessible path into water
		Handrails
		Location from accessible parking
Play Areas (tot lots)	All Play Equipment i.e. swings, slides	Same experience provided to all <i>yes</i> <i>Could improve access to playground by making some surfaces improved, designate parking.</i>
	Access Routes	Located adjacent to accessible paths <i>yes</i> Enough space between equipment for wheelchair <i>yes</i>
Game Areas: *ballfield *basketball *tennis	Access Routes	Located adjacent to accessible paths
		Berm cuts onto courts
	Equipment	Height
		Dimensions
Boat Docks	Access Routes	Located adjacent to accessible paths
		Handrails
Fishing Facilities	Access Routes	Located adjacent to accessible paths
		Handrails
	Equipment	Arm Rests
		Bait Shelves
		Handrails
Programming	Are special programs at your facilities accessible?	Learn-to-Swim
		Guided Hikes
		Interpretive Programs
Services and Technical Assistance	Information available in alternative formats i.e. for visually impaired	Process to request interpretive services (i.e. sign language interpreter) for meetings

Bathrooms and picnic facilities need maintenance

Location:

PARKING			
Total Spaces	Required Accessible Spaces		
Up to 25	1 space		
26-50	2 spaces		
51-75	3 spaces		
76-100	4 spaces		
101-150	5 spaces		
151-200	6 spaces		
201-300	7 spaces		
301-400	8 spaces		
401-500	9 spaces		
Specification for Accessible Spaces	Yes	No	Comments/Transition Notes
Accessible space located closest to accessible entrance	✓		
Where spaces cannot be located within 200 ft of accessible entrance, drop-off area is provided within 100 ft.		✓	
Minimum width of 13 ft includes 8 ft space plus 5 ft access aisle	✓		
Van space – minimum of 1 van space for every accessible space, 8 ft wide plus 8 ft aisle. Alternative is to make all accessible spaces 11 ft wide with 5 ft aisle.	✓		side walk access needs to be improved some cracks
Sign with international symbol of accessibility at each space or pair of spaces	✓		
Sign minimum 5 ft, maximum 8 ft to top of sign	✓	NO	
Surface evenly paved or hard-packed (no cracks)	✓		
Surface slope less than 1:20, 5%	✓		
Curbscut to pathway from parking lot at each space or pair of spaces, if sidewalk (curb) is present	✓		
Curbscut is a minimum width of 3 ft, excluding sloped sides, has sloped sides, all slopes not to exceed 1:12, and textured or painted yellow	✓		
RAMPS			
Specification	Yes	No	Comments/Transition Notes
Slope Maximum 1:12			
Minimum width 4 ft between handrails			
Handrails on both sides if ramp is longer than 6 ft			
Handrails at 34" and 19" from ramp surface			
Handrails extend 12" beyond top and bottom			
Handgrip oval or round			
Handgrip smooth surface			
Handgrip diameter between 1 1/4" and 2"			
Clearance of 1 1/2" between wall and wall rail			
Non-slip surface			
Level platforms (4ft x 4 ft) at every 30 ft, at top, at bottom, at change of direction			

Notes

Location

SITE ACCESS, PATH OF TRAVEL, ENTRANCES			
Specification	Yes	No	Comments/Transition Notes
Site Access			
Accessible path of travel from passenger disembarking area and parking area to accessible entrance	X	X	needs to be cleared, mulch/cracks in pavement
Disembarking area at accessible entrance	✓		
Surface evenly paved or hard-packed	✓		
No ponding of water	✓		
Path of Travel			
Path does not require the use of stairs	X		
Path is stable, firm and slip resistant	X		
3 ft wide minimum	X		
Slope maximum 1:20 (5%) and maximum cross pitch is 2% (1:50).	X		
Continuous common surface, no changes in level greater than 1/2 inch	X		
Any objects protruding onto the pathway must be detected by a person with a visual disability using a cane	X		
Objects protruding more than 4" from the wall must be within 27" of the ground, or higher than 80"	X		
Curb on the pathway must have curb cuts at drives, parking and drop-offs	X		
Entrances			
Primary public entrances accessible to person using wheelchair, must be signed, gotten to independently, and <i>not</i> be the service entrance			NO Need bigger gate
Level space extending 5 ft. from the door, interior and exterior of entrance doors			NO for pass
Minimum 32" clear width opening (i.e. 36" door with standard hinge)			NO
At least 18" clear floor area on latch, pull side of door			
Door handle no higher than 48" and operable with a closed fist			
Vestibule is 4 ft plus the width of the door swinging into the space			
Entrance(s) on a level that makes elevators accessible			
Door mats less than 1/2" thick are securely fastened			
Door mats more than 1/2" thick are recessed			
Grates in path of travel have openings of 1/2" maximum			
Signs at non-accessible entrance(s) indicate direction to accessible entrance			
Emergency egress – alarms with flashing lights and audible signals, sufficiently lighted			

Notes

Location

STAIRS and DOORS			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Stairs			
No open risers			
Nosings not projecting			
Treads no less than 11" wide			
Handrails on both sides			
Handrails 34"-38" above tread			
Handrail extends a minimum of 1 ft beyond top and bottom riser (if no safety hazard and space permits)			
Handgrip oval or round			
Handgrip has a smooth surface			
Handgrip diameter between 1¼" and 1½"			
1½" clearance between wall and handrail			
Doors			
Minimum 32" clear opening			
At least 18" clear floor space on pull side of door			
Closing speed minimum 3 seconds to within 3" of the latch			
Maximum pressure 5 pounds interior doors			
Threshold maximum ½" high, beveled on both sides			
Hardware operable with a closed fist (no conventional door knobs or thumb latch devices)			
Hardware minimum 36", maximum 48" above the floor			
Clear, level floor space extends out 5 ft from both sides of the door			
Door adjacent to revolving door is accessible and unlocked			
Doors opening into hazardous area have hardware that is knurled or roughened			

Notes

Location

RESTROOMS – also see Doors and Vestibules			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
5 ft turning space measured 12" from the floor			
At least one Sink:			
Clear floor space of 30" by 48" to allow a forward approach			
Mounted without pedestal or legs, height 34" to top of rim			
Extends at least 22" from the wall			
Open knee space a minimum 19" deep, 30" width, and 27" high			
Cover exposed pipes with insulation			
Faucets operable with closed fist (lever or spring activated handle)			
At least one Stall:			
Accessible to person using wheelchair at 60" wide by 72" deep			
Stall door is 36" wide			
Stall door swings out			
Stall door is self closing			
Stall door has a pull latch			
Lock on stall door is operable with a closed fist, and 32" above the floor			
Coat hook is 54" high			
Toilet			
18" from center to nearest side wall			
42" minimum clear space from center to farthest wall or fixture			
Top of seat 17"-19" above the floor			
Grab Bars			
On back and side wall closest to toilet			
1¼" diameter			
1½" clearance to wall			
Located 30" above and parallel to the floor			
Acid-etched or roughened surface			
42" long			
Fixtures			
Toilet paper dispenser is 24" above floor			
One mirror set a maximum 38" to bottom (if tilted, 42")			
Dispensers (towel, soap, etc) at least one of each a maximum 42" above the floor			

Notes

Location

FLOORS, DRINKING FOUNTAINS, TELEPHONES			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Floors			
Non-slip surface			
Carpeting is high-density, low pile, non-absorbent, stretched taut, securely anchored			
Corridor width minimum is 3 ft			
Objects (signs, ceiling lights, fixtures) can only protrude 4" into the path of travel from a height of 27" to 80" above the floor			
Drinking Fountains			
Spouts no higher than 36" from floor to outlet			
Hand operated push button or level controls			
Spouts located near front with stream of water as parallel to front as possible			
If recessed, recess a minimum 30" width, and no deeper than depth of fountain			
If no clear knee space underneath, clear floor space 30" x 48" to allow parallel approach			
Telephones			
Highest operating part a maximum 54" above the floor			
Access within 12" of phone, 30" high by 30" wide			
Adjustable volume control on headset so identified			
SIGNS, SIGNALS, AND SWITCHES			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Switches, Controls and Signs			
Switches and controls for light, heat, ventilation, windows, fire alarms, thermostats, etc, must be a minimum of 36" and a maximum of 48" above the floor for a forward reach, a maximum of 54" for a side reach			
Electrical outlets centered no lower than 18" above the floor			
Warning signals must be visual as well as audible			
Signs			
Mounting height must be 60" to centerline of the sign			
Within 18" of door jamb or recessed			
Letters and numbers at least 1¼" high			
Letters and numbers raised .03"			
Letters and numbers contrast with the background color			

Notes

Location

SWIMMING POOLS – accessibility can be via ramp, lifting device, or transfer area			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Ramp at least 34" wide with a non-slip surface extending into the shallow end, slope not exceeding 1:6 with handrails on both sides		X	
Lifting device	X		
Transfer area 18" above the path of travel and a minimum of 18" wide	X		
Unobstructed path of travel not less than 48" wide around pool	X		
Non-slip surface	X		

Location

SHOWER ROOMS - Showers must accommodate both wheel-in and transfer use			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Stalls 36" by 60" minimum, with a 36" door opening			
Floors are pitched to drain the stall at the corner farthest from entrance			
Floors are non-slip surface			
Controls operate by a single lever with a pressure balance mixing valve			
Controls are located on the center wall adjacent to the hinged seat			
Shower heads attached to a flexible metal hose			
Shower heads attached to wall mounting adjustable from 42" to 72" above the floor			
Seat is hinged and padded and at least 16" deep, folds upward, securely attached to side wall, height is 18" to the top of the seat, and at least 24" long			
Soap trays without handhold features unless they can support 250 pounds			
2 grab bars are provided, one 30" and one 48" long, or one continuous L shaped bar			
Grab bars are placed horizontally at 36" above the floor line			

Location

PICNICKING			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
A minimum of 5% of the total tables must be accessible with clear space under the table top not less than 30" wide and 19" deep per seating space and not less than 27" clear from the ground to the underside of the table. An additional 29" clear space (totaling 48") must extend beyond the 19" clear space under the table to provide access			
For tables without toe clearance, the knee space under the table must be at least 28" high, 30" wide and 24" deep.			
Top of table no higher than 32" above ground			
Surface of the clear ground space under and around the table must be stable, firm and slip-resistant, and evenly graded with a maximum slope of 2% in all directions			
Accessible tables, grills and fire rings must have clear ground space of at least 36" around the perimeter			

Be sure same place same

Facility Inventory

Location:

ACTIVITY	EQUIPMENT	NOTES
Picnic Facilities	Tables & Benches	Located adjacent to accessible paths <i>yes</i>
		Access to Open Spaces <i>yes</i>
		Back and Arm Rests <i>no</i>
		Adequate number <i>yes</i>
	Grills	Height of Cooking Surface
	Trash Cans	Located adjacent to accessible paths
	Picnic Shelters	Located adjacent to accessible paths Located near accessible water fountains, trash can, restroom, parking, etc.
Trails		Surface material
		Dimensions
		Rails
		Signage (for visually impaired)
Swimming Facilities	Pools	Entrance
		Location from accessible parking
		Safety features i.e. warning for visually impaired
	Beaches	Location from accessible path into water
		Handrails
		Location from accessible parking Shade provided
Play Areas (tot lots)	All Play Equipment i.e. swings, slides	Same experience provided to all
	Access Routes	Located adjacent to accessible paths Enough space between equipment for wheelchair
Game Areas: *ballfield *basketball *tennis	Access Routes	Located adjacent to accessible paths
		Berm cuts onto courts
	Equipment	Height
		Dimensions Spectator Seating
Boat Docks	Access Routes	Located adjacent to accessible paths Handrails
Fishing Facilities	Access Routes	Located adjacent to accessible paths
		Handrails
	Equipment	Arm Rests
		Bait Shelves
		Handrails Fish Cleaning Tables
Programming	Are special programs at your facilities accessible?	Learn-to-Swim
		Guided Hikes
		Interpretive Programs
Services and Technical Assistance		Information available in alternative formats i.e. for visually impaired
		Process to request interpretive services (i.e. sign language interpreter) for meetings

Location:

PARKING *60*

<i>Total Spaces</i>		<i>Required Accessible Spaces</i>	
Up to 25		1 space	
26-50		2 spaces	
51-75		3 spaces	
76-100		4 spaces	
101-150		5 spaces	
151-200		6 spaces	
201-300		7 spaces	
301-400		8 spaces	
401-500		9 spaces	
<i>Specification for Accessible Spaces</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Accessible space located closest to accessible entrance	<input checked="" type="checkbox"/>		
Where spaces cannot be located within 200 ft of accessible entrance, drop-off area is provided within 100 ft.			
Minimum width of 13 ft includes 8 ft space plus 5 ft access aisle			
Van space – minimum of 1 van space for every accessible space, 8 ft wide plus 8 ft aisle. Alternative is to make all accessible spaces 11 ft wide with 5 ft aisle.	<input checked="" type="checkbox"/>		
Sign with international symbol of accessibility at each space or pair of spaces			
Sign minimum 5 ft, maximum 8 ft to top of sign	<input checked="" type="checkbox"/>		
Surface evenly paved or hard-packed (no cracks)			
Surface slope less than 1:20, 5%			
Curbcut to pathway from parking lot at each space or pair of spaces, if sidewalk (curb) is present			
Curbcut is a minimum width of 3 ft, excluding sloped sides, has sloped sides, all slopes not to exceed 1:12, and textured or painted yellow	<input checked="" type="checkbox"/>		
RAMPS			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Slope Maximum 1:12	<input checked="" type="checkbox"/>		
Minimum width 4 ft between handrails	<input checked="" type="checkbox"/>		
Handrails on both sides if ramp is longer than 6 ft	<input checked="" type="checkbox"/>		
Handrails at 34" and 19" from ramp surface	<input checked="" type="checkbox"/>		
Handrails extend 12" beyond top and bottom	<input checked="" type="checkbox"/>		
Handgrip oval or round		<input checked="" type="checkbox"/>	
Handgrip smooth surface	<input checked="" type="checkbox"/>		
Handgrip diameter between 1¼" and 2"		<input checked="" type="checkbox"/>	
Clearance of 1½" between wall and wall rail		<input checked="" type="checkbox"/>	
Non-slip surface	<input checked="" type="checkbox"/>		
Level platforms (4ft x 4 ft) at every 30 ft, at top, at bottom, at change of direction	<input checked="" type="checkbox"/>		

Notes

Location

SITE ACCESS, PATH OF TRAVEL, ENTRANCES			
Specification	Yes	No	Comments/Transition Notes
Site Access			
Accessible path of travel from passenger disembarking area and parking area to accessible entrance	X		
Disembarking area at accessible entrance	X		
Surface evenly paved or hard-packed	X		
No ponding of water	X		
Path of Travel			
Path does not require the use of stairs	X		
Path is stable, firm and slip resistant	X		
3 ft wide minimum	X		
Slope maximum 1:20 (5%) and maximum cross pitch is 2% (1:50).	X		
Continuous common surface, no changes in level greater than 1/2 inch	X		
Any objects protruding onto the pathway must be detected by a person with a visual disability using a cane	X		
Objects protruding more than 4" from the wall must be within 27" of the ground, or higher than 80"	X		
Curb on the pathway must have curb cuts at drives, parking and drop-offs	X		
Entrances			
Primary public entrances accessible to person using wheelchair, must be signed, gotten to independently, and <i>not</i> be the service entrance		X	
Level space extending 5 ft. from the door, interior and exterior of entrance doors	X		
Minimum 32" clear width opening (i.e. 36" door with standard hinge)	X		
At least 18" clear floor area on latch, pull side of door	X		
Door handle no higher than 48" and operable with a closed fist	X		
Vestibule is 4 ft plus the width of the door swinging into the space	X		
Entrance(s) on a level that makes elevators accessible			
Door mats less than 1/2" thick are securely fastened	X		
Door mats more than 1/2" thick are recessed			
Grates in path of travel have openings of 1/2" maximum			
Signs at non-accessible entrance(s) indicate direction to accessible entrance			
Emergency egress – alarms with flashing lights and audible signals, sufficiently lighted			

Notes

Location

STAIRS and DOORS			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Stairs			
No open risers			
Nosings not projecting			
Treads no less than 11" wide			
Handrails on both sides			
Handrails 34"-38" above tread			
Handrail extends a minimum of 1 ft beyond top and bottom riser (if no safety hazard and space permits)			
Handgrip oval or round			
Handgrip has a smooth surface			
Handgrip diameter between 1¼" and 1½"			
1½" clearance between wall and handrail			
Doors			
Minimum 32" clear opening			
At least 18" clear floor space on pull side of door			
Closing speed minimum 3 seconds to within 3" of the latch			
Maximum pressure 5 pounds interior doors			
Threshold maximum ½" high, beveled on both sides			
Hardware operable with a closed fist (no conventional door knobs or thumb latch devices)			
Hardware minimum 36", maximum 48" above the floor			
Clear, level floor space extends out 5 ft from both sides of the door			
Door adjacent to revolving door is accessible and unlocked			
Doors opening into hazardous area have hardware that is knurled or roughened			

Notes

Location

RESTROOMS – also see Doors and Vestibules			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
5 ft turning space measured 12" from the floor			
At least one Sink:			
Clear floor space of 30" by 48" to allow a forward approach			
Mounted without pedestal or legs, height 34" to top of rim			
Extends at least 22" from the wall			
Open knee space a minimum 19" deep, 30" width, and 27" high			
Cover exposed pipes with insulation			
Faucets operable with closed fist (lever or spring activated handle)			
At least one Stall:			
Accessible to person using wheelchair at 60" wide by 72" deep			
Stall door is 36" wide			
Stall door swings out			
Stall door is self closing			
Stall door has a pull latch			
Lock on stall door is operable with a closed fist, and 32" above the floor			
Coat hook is 54" high			
Toilet			
18" from center to nearest side wall			
42" minimum clear space from center to farthest wall or fixture			
Top of seat 17"-19" above the floor			
Grab Bars			
On back and side wall closest to toilet			
1¼" diameter			
1½" clearance to wall			
Located 30" above and parallel to the floor			
Acid-etched or roughened surface			
42" long			
Fixtures			
Toilet paper dispenser is 24" above floor			
One mirror set a maximum 38" to bottom (if tilted, 42")			
Dispensers (towel, soap, etc) at least one of each a maximum 42" above the floor			

Notes

Location

FLOORS, DRINKING FOUNTAINS, TELEPHONES			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Floors			
Non-slip surface			
Carpeting is high-density, low pile, non-absorbent, stretched taut, securely anchored			
Corridor width minimum is 3 ft			
Objects (signs, ceiling lights, fixtures) can only protrude 4" into the path of travel from a height of 27" to 80" above the floor			
Drinking Fountains			
Spouts no higher than 36" from floor to outlet			
Hand operated push button or level controls			
Spouts located near front with stream of water as parallel to front as possible			
If recessed, recess a minimum 30" width, and no deeper than depth of fountain			
If no clear knee space underneath, clear floor space 30" x 48" to allow parallel approach			
Telephones			
Highest operating part a maximum 54" above the floor			
Access within 12" of phone, 30" high by 30" wide			
Adjustable volume control on headset so identified			
SIGNS, SIGNALS, AND SWITCHES			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Switches, Controls and Signs			
Switches and controls for light, heat, ventilation, windows, fire alarms, thermostats, etc, must be a minimum of 36" and a maximum of 48" above the floor for a forward reach, a maximum of 54" for a side reach			
Electrical outlets centered no lower than 18" above the floor			
Warning signals must be visual as well as audible			
Signs			
Mounting height must be 60" to centerline of the sign			
Within 18" of door jamb or recessed			
Letters and numbers at least 1/4" high			
Letters and numbers raised .03"			
Letters and numbers contrast with the background color			

Notes

Location

Boone Scenic Park Store

SWIMMING POOLS – accessibility can be via ramp, lifting device, or transfer area			
Specification	Yes	No	Comments/Transition Notes
Ramp at least 34" wide with a non-slip surface extending into the shallow end, slope not exceeding 1:6 with handrails on both sides			
Lifting device			
Transfer area 18" above the path of travel and a minimum of 18" wide			
Unobstructed path of travel not less than 48" wide around pool			
Non-slip surface			

Location

SHOWER ROOMS - Showers must accommodate both wheel-in and transfer use			
Specification	Yes	No	Comments/Transition Notes
Stalls 36" by 60" minimum, with a 36" door opening			
Floors are pitched to drain the stall at the corner farthest from entrance			
Floors are non-slip surface			
Controls operate by a single lever with a pressure balance mixing valve			
Controls are located on the center wall adjacent to the hinged seat			
Shower heads attached to a flexible metal hose			
Shower heads attached to wall mounting adjustable from 42" to 72" above the floor			
Seat is hinged and padded and at least 16" deep, folds upward, securely attached to side wall, height is 18" to the top of the seat, and at least 24" long			
Soap trays without handhold features unless they can support 250 pounds			
2 grab bars are provided, one 30" and one 48" long, or one continuous L shaped bar			
Grab bars are placed horizontally at 36" above the floor line			

Location

PICNICKING			
Specification	Yes	No	Comments/Transition Notes
A minimum of 5% of the total tables must be accessible with clear space under the table top not less than 30" wide and 19" deep per seating space and not less than 27" clear from the ground to the underside of the table. An additional 29" clear space (totaling 48") must extend beyond the 19" clear space under the table to provide access		✓	
For tables without toe clearance, the knee space under the table must be at least 28" high, 30" wide and 24" deep.		✓	
Top of table no higher than 32" above ground	✓		
Surface of the clear ground space under and around the table must be stable, firm and slip-resistant, and evenly graded with a maximum slope of 2% in all directions	✓		
Accessible tables, grills and fire rings must have clear ground space of at least 36" around the perimeter		N/A	

Facility Inventory

Location: Butler Memorial Park - Kayajon Ave

ACTIVITY	EQUIPMENT	NOTES
Picnic Facilities <i>NIA</i>	Tables & Benches	Located adjacent to accessible paths
		Access to Open Spaces
		Back and Arm Rests
		Adequate number
	Grills	Height of Cooking Surface Located adjacent to accessible paths
	Trash Cans	Located adjacent to accessible paths
	Picnic Shelters	Located adjacent to accessible paths
		Located near accessible water fountains, trash can, restroom, parking, etc.
Trails <i>NIA</i>		Surface material
		Dimensions
		Rails
		Signage (for visually impaired)
Swimming Facilities <i>NIA</i>	Pools	Entrance
		Location from accessible parking
		Safety features i.e. warning for visually impaired
	Beaches	Location from accessible path into water
		Handrails
		Location from accessible parking Shade provided
Play Areas (tot lots)	All Play Equipment i.e. <u>swings</u> , slides	Same experience provided to all <i>yes</i>
	Access Routes	Located adjacent to accessible paths <i>yes</i>
		Enough space between equipment for wheelchair <i>yes</i>
Game Areas: *ballfield *basketball *tennis <i>NIA</i>	Access Routes	Located adjacent to accessible paths
		Berm cuts onto courts
	Equipment	Height
		Dimensions
		Spectator Seating
Boat Docks <i>NIA</i>	Access Routes	Located adjacent to accessible paths
		Handrails
Fishing Facilities <i>NIA</i>	Access Routes	Located adjacent to accessible paths
		Handrails
	Equipment	Arm Rests
		Bait Shelves
		Handrails
		Fish Cleaning Tables
Programming <i>NIA</i>	Are special programs at your facilities accessible?	Learn-to-Swim
		Guided Hikes
		Interpretive Programs
Services and Technical Assistance <i>NIA</i>		Information available in alternative formats i.e. for visually impaired
		Process to request interpretive services (i.e. sign language interpreter) for meetings

Location:

PARKING N/A			
<i>Total Spaces</i>	<i>Required Accessible Spaces</i>		
Up to 25	1 space		
26-50	2 spaces		
51-75	3 spaces		
76-100	4 spaces		
101-150	5 spaces		
151-200	6 spaces		
201-300	7 spaces		
301-400	8 spaces		
401-500	9 spaces		
<i>Specification for Accessible Spaces</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Accessible space located closest to accessible entrance			
Where spaces cannot be located within 200 ft of accessible entrance, drop-off area is provided within 100 ft.			
Minimum width of 13 ft includes 8 ft space plus 5 ft access aisle			
Van space – minimum of 1 van space for every accessible space, 8 ft wide plus 8 ft aisle. Alternative is to make all accessible spaces 11 ft wide with 5 ft aisle.			
Sign with international symbol of accessibility at each space or pair of spaces			
Sign minimum 5 ft, maximum 8 ft to top of sign			
Surface evenly paved or hard-packed (no cracks)			
Surface slope less than 1:20, 5%			
Curbscut to pathway from parking lot at each space or pair of spaces, if sidewalk (curb) is present			
Curbscut is a minimum width of 3 ft, excluding sloped sides, has sloped sides, all slopes not to exceed 1:12, and textured or painted yellow			
RAMPS N/A			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Slope Maximum 1:12			
Minimum width 4 ft between handrails			
Handrails on both sides if ramp is longer than 6 ft			
Handrails at 34" and 19" from ramp surface			
Handrails extend 12" beyond top and bottom			
Handgrip oval or round			
Handgrip smooth surface			
Handgrip diameter between 1 1/4" and 2"			
Clearance of 1 1/2" between wall and wall rail			
Non-slip surface			
Level platforms (4ft x 4 ft) at every 30 ft, at top, at bottom, at change of direction			

Notes

There is no designated parking lot.
Cars can park along the side of the road.

Location

SITE ACCESS, PATH OF TRAVEL, ENTRANCES N/A			
Specification	Yes	No	Comments/Transition Notes
Site Access			
Accessible path of travel from passenger disembarking area and parking area to accessible entrance			
Disembarking area at accessible entrance			
Surface evenly paved or hard-packed			
No ponding of water			
Path of Travel			
Path does not require the use of stairs			
Path is stable, firm and slip resistant			
3 ft wide minimum			
Slope maximum 1:20 (5%) and maximum cross pitch is 2% (1:50).			
Continuous common surface, no changes in level greater than ½ inch			
Any objects protruding onto the pathway must be detected by a person with a visual disability using a cane			
Objects protruding more than 4" from the wall must be within 27" of the ground, or higher than 80"			
Curb on the pathway must have curb cuts at drives, parking and drop-offs			
Entrances			
Primary public entrances accessible to person using wheelchair, must be signed, gotten to independently, and <i>not</i> be the service entrance			
Level space extending 5 ft. from the door, interior and exterior of entrance doors			
Minimum 32" clear width opening (i.e. 36" door with standard hinge)			
At least 18" clear floor area on latch, pull side of door			
Door handle no higher than 48" and operable with a closed fist			
Vestibule is 4 ft plus the width of the door swinging into the space			
Entrance(s) on a level that makes elevators accessible			
Door mats less than ½" thick are securely fastened			
Door mats more than ½" thick are recessed			
Grates in path of travel have openings of ½" maximum			
Signs at non-accessible entrance(s) indicate direction to accessible entrance			
Emergency egress – alarms with flashing lights and audible signals, sufficiently lighted			

Notes

Location

STAIRS and DOORS NIA			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Stairs			
No open risers			
Nosings not projecting			
Treads no less than 11" wide			
Handrails on both sides			
Handrails 34"-38" above tread			
Handrail extends a minimum of 1 ft beyond top and bottom riser (if no safety hazard and space permits)			
Handgrip oval or round			
Handgrip has a smooth surface			
Handgrip diameter between 1¼" and 1½"			
1½" clearance between wall and handrail			
Doors			
Minimum 32" clear opening			
At least 18" clear floor space on pull side of door			
Closing speed minimum 3 seconds to within 3" of the latch			
Maximum pressure 5 pounds interior doors			
Threshold maximum ½" high, beveled on both sides			
Hardware operable with a closed fist (no conventional door knobs or thumb latch devices)			
Hardware minimum 36", maximum 48" above the floor			
Clear, level floor space extends out 5 ft from both sides of the door			
Door adjacent to revolving door is accessible and unlocked			
Doors opening into hazardous area have hardware that is knurled or roughened			

Notes

Location

RESTROOMS – also see Doors and Vestibules N/A			
Specification	Yes	No	Comments/Transition Notes
5 ft turning space measured 12" from the floor			
At least one Sink:			
Clear floor space of 30" by 48" to allow a forward approach			
Mounted without pedestal or legs, height 34" to top of rim			
Extends at least 22" from the wall			
Open knee space a minimum 19" deep, 30" width, and 27" high			
Cover exposed pipes with insulation			
Faucets operable with closed fist (lever or spring activated handle)			
At least one Stall:			
Accessible to person using wheelchair at 60" wide by 72" deep			
Stall door is 36" wide			
Stall door swings out			
Stall door is self closing			
Stall door has a pull latch			
Lock on stall door is operable with a closed fist, and 32" above the floor			
Coat hook is 54" high			
Toilet			
18" from center to nearest side wall			
42" minimum clear space from center to farthest wall or fixture			
Top of seat 17"-19" above the floor			
Grab Bars			
On back and side wall closest to toilet			
1½" diameter			
1½" clearance to wall			
Located 30" above and parallel to the floor			
Acid-etched or roughened surface			
42" long			
Fixtures			
Toilet paper dispenser is 24" above floor			
One mirror set a maximum 38" to bottom (if tilted, 42")			
Dispensers (towel, soap, etc) at least one of each a maximum 42" above the floor			

Notes

Location

N/A

FLOORS, DRINKING FOUNTAINS, TELEPHONES			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Floors			
Non-slip surface			
Carpeting is high-density, low pile, non-absorbent, stretched taut, securely anchored			
Corridor width minimum is 3 ft			
Objects (signs, ceiling lights, fixtures) can only protrude 4" into the path of travel from a height of 27" to 80" above the floor			
Drinking Fountains			
Spouts no higher than 36" from floor to outlet			
Hand operated push button or level controls			
Spouts located near front with stream of water as parallel to front as possible			
If recessed, recess a minimum 30" width, and no deeper than depth of fountain			
If no clear knee space underneath, clear floor space 30" x 48" to allow parallel approach			
Telephones			
Highest operating part a maximum 54" above the floor			
Access within 12" of phone, 30" high by 30" wide			
Adjustable volume control on headset so identified			
SIGNS, SIGNALS, AND SWITCHES			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Switches, Controls and Signs			
Switches and controls for light, heat, ventilation, windows, fire alarms, thermostats, etc, must be a minimum of 36" and a maximum of 48" above the floor for a forward reach, a maximum of 54" for a side reach			
Electrical outlets centered no lower than 18" above the floor			
Warning signals must be visual as well as audible			
Signs			
Mounting height must be 60" to centerline of the sign			
Within 18" of door jamb or recessed			
Letters and numbers at least 1/4" high			
Letters and numbers raised .03"			
Letters and numbers contrast with the background color			

Notes

Location

SWIMMING POOLS – accessibility can be via ramp, lifting device, or transfer area N/A			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Ramp at least 34" wide with a non-slip surface extending into the shallow end, slope not exceeding 1:6 with handrails on both sides			
Lifting device			
Transfer area 18" above the path of travel and a minimum of 18" wide			
Unobstructed path of travel not less than 48" wide around pool			
Non-slip surface			

Location

SHOWER ROOMS - Showers must accommodate both wheel-in and transfer use N/A			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Stalls 36" by 60" minimum, with a 36" door opening			
Floors are pitched to drain the stall at the corner farthest from entrance			
Floors are non-slip surface			
Controls operate by a single lever with a pressure balance mixing valve			
Controls are located on the center wall adjacent to the hinged seat			
Shower heads attached to a flexible metal hose			
Shower heads attached to wall mounting adjustable from 42" to 72" above the floor			
Seat is hinged and padded and at least 16" deep, folds upward, securely attached to side wall, height is 18" to the top of the seat, and at least 24" long			
Soap trays without handhold features unless they can support 250 pounds			
2 grab bars are provided, one 30" and one 48" long, or one continuous L shaped bar			
Grab bars are placed horizontally at 36" above the floor line			

Location

PICNICKING N/A			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
A minimum of 5% of the total tables must be accessible with clear space under the table top not less than 30" wide and 19" deep per seating space and not less than 27" clear from the ground to the underside of the table. An additional 29" clear space (totaling 48") must extend beyond the 19" clear space under the table to provide access			
For tables without toe clearance, the knee space under the table must be at least 28" high, 30" wide and 24" deep.			
Top of table no higher than 32" above ground			
Surface of the clear ground space under and around the table must be stable, firm and slip-resistant, and evenly graded with a maximum slope of 2% in all directions			
Accessible tables, grills and fire rings must have clear ground space of at least 36" around the perimeter			

Facility Inventory

Location: Buzzards Bay Beach

ACTIVITY	EQUIPMENT	NOTES	
Picnic Facilities N/A	Tables & Benches	Located adjacent to accessible paths	
		Access to Open Spaces	
		Back and Arm Rests	
		Adequate number	
	Grills	Height of Cooking Surface Located adjacent to accessible paths	
Trash Cans	Located adjacent to accessible paths		
	Picnic Shelters	Located adjacent to accessible paths Located near accessible water fountains, trash can, restroom, parking, etc.	
Trails N/A		Surface material	
		Dimensions	
		Rails	
		Signage (for visually impaired)	
Swimming Facilities	Pools N/A	Entrance	
		Location from accessible parking	
		Safety features i.e. warning for visually impaired	
	Beaches	Location from accessible path into water	NO
		Handrails	NO
Location from accessible parking		NO	
	Shade provided	NO	
Play Areas (tot lots)	All Play Equipment i.e. swings, slides	Same experience provided to all	Yes
	Access Routes	Located adjacent to accessible paths	NO
		Enough space between equipment for wheelchair	Yes
Game Areas: *ballfield *basketball *tennis N/A	Access Routes	Located adjacent to accessible paths	
		Berm cuts onto courts	
	Equipment	Height	
		Dimensions	
		Spectator Seating	
Boat Docks	Access Routes	Located adjacent to accessible paths	Yes
		Handrails	NO
Fishing Facilities	Access Routes	Located adjacent to accessible paths	NO YES - there is a step to get on ramp
		Handrails	Yes
	Equipment	Arm Rests	No
		Bait Shelves	No
		Handrails	No
	Fish Cleaning Tables	No	
Programming N/A	Are special programs at your facilities accessible?	Learn-to-Swim	
		Guided Hikes	
		Interpretive Programs	
Services and Technical Assistance N/A	Information available in alternative formats i.e. for visually impaired		
	Process to request interpretive services (i.e. sign language interpreter) for meetings		

Location:

PARKING			
<i>Total Spaces</i>	<i>Required Accessible Spaces</i>		
Up to 25	1 space		
26-50	2 spaces		
51-75	3 spaces		
76-100	4 spaces		
101-150	5 spaces		
151-200	6 spaces		
201-300	7 spaces		
301-400	8 spaces		
401-500	9 spaces		
<i>Specification for Accessible Spaces</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Accessible space located closest to accessible entrance	✓		
Where spaces cannot be located within 200 ft of accessible entrance, drop-off area is provided within 100 ft.			
Minimum width of 13 ft includes 8 ft space plus 5 ft access aisle		✓	No access aisle
Van space – minimum of 1 van space for every accessible space, 8 ft wide plus 8 ft aisle. Alternative is to make all accessible spaces 11 ft wide with 5 ft aisle.		✓	
Sign with international symbol of accessibility at each space or pair of spaces		✓	Painted symbol on pavement
Sign minimum 5 ft, maximum 8 ft to top of sign		✓	
Surface evenly paved or hard-packed (no cracks)	✓		
Surface slope less than 1:20, 5%	✓		
Curbscut to pathway from parking lot at each space or pair of spaces, if sidewalk (curb) is present	N/A		No curb
Curbscut is a minimum width of 3 ft, excluding sloped sides, has sloped sides, all slopes not to exceed 1:12, and textured or painted yellow			
RAMPS N/A			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Slope Maximum 1:12			
Minimum width 4 ft between handrails			
Handrails on both sides if ramp is longer than 6 ft			
Handrails at 34" and 19" from ramp surface			
Handrails extend 12" beyond top and bottom			
Handgrip oval or round			
Handgrip smooth surface			
Handgrip diameter between 1 1/4" and 2"			
Clearance of 1 1/2" between wall and wall rail			
Non-slip surface			
Level platforms (4ft x 4 ft) at every 30 ft, at top, at bottom, at change of direction			

Notes

Recommend to put up signs

Location

SITE ACCESS, PATH OF TRAVEL, ENTRANCES			
Specification	Yes	No	Comments/Transition Notes
Site Access			
Accessible path of travel from passenger disembarking area and parking area to accessible entrance	✓	✓	
Disembarking area at accessible entrance		✓	
Surface evenly paved or hard-packed	✓		
No ponding of water	✓		
Path of Travel			
Path does not require the use of stairs		✓	Stairs to get on beach
Path is stable, firm and slip resistant		✓	
3 ft wide minimum	✓		
Slope maximum 1:20 (5%) and maximum cross pitch is 2% (1:50).			
Continuous common surface, no changes in level greater than ½ inch			
Any objects protruding onto the pathway must be detected by a person with a visual disability using a cane			
Objects protruding more than 4" from the wall must be within 27" of the ground, or higher than 80"			
Curb on the pathway must have curb cuts at drives, parking and drop-offs			
Entrances N/A			
Primary public entrances accessible to person using wheelchair, must be signed, gotten to independently, and <i>not</i> be the service entrance			
Level space extending 5 ft. from the door, interior and exterior of entrance doors			
Minimum 32" clear width opening (i.e. 36" door with standard hinge)			
At least 18" clear floor area on latch, pull side of door			
Door handle no higher than 48" and operable with a closed fist			
Vestibule is 4 ft plus the width of the door swinging into the space			
Entrance(s) on a level that makes elevators accessible			
Door mats less than ½" thick are securely fastened			
Door mats more than ½" thick are recessed			
Grates in path of travel have openings of ½" maximum			
Signs at non-accessible entrance(s) indicate direction to accessible entrance			
Emergency egress – alarms with flashing lights and audible signals, sufficiently lighted			

Notes

Recommend putting a ramp onto beach to replace stairs

Location

STAIRS and DOORS NIA			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Stairs			
No open risers			
Nosings not projecting			
Treads no less than 11" wide			
Handrails on both sides			
Handrails 34"-38" above tread			
Handrail extends a minimum of 1 ft beyond top and bottom riser (if no safety hazard and space permits)			
Handgrip oval or round			
Handgrip has a smooth surface			
Handgrip diameter between 1¼" and 1½"			
1½" clearance between wall and handrail			
Doors			
Minimum 32" clear opening			
At least 18" clear floor space on pull side of door			
Closing speed minimum 3 seconds to within 3" of the latch			
Maximum pressure 5 pounds interior doors			
Threshold maximum ½" high, beveled on both sides			
Hardware operable with a closed fist (no conventional door knobs or thumb latch devices)			
Hardware minimum 36", maximum 48" above the floor			
Clear, level floor space extends out 5 ft from both sides of the door			
Door adjacent to revolving door is accessible and unlocked			
Doors opening into hazardous area have hardware that is knurled or roughened			

Notes

Location

RESTROOMS – also see Doors and Vestibules N/A			
Specification	Yes	No	Comments/Transition Notes
5 ft turning space measured 12" from the floor			
At least one Sink:			
Clear floor space of 30" by 48" to allow a forward approach			
Mounted without pedestal or legs, height 34" to top of rim			
Extends at least 22" from the wall			
Open knee space a minimum 19" deep, 30" width, and 27" high			
Cover exposed pipes with insulation			
Faucets operable with closed fist (lever or spring activated handle)			
At least one Stall:			
Accessible to person using wheelchair at 60" wide by 72" deep			
Stall door is 36" wide			
Stall door swings out			
Stall door is self closing			
Stall door has a pull latch			
Lock on stall door is operable with a closed fist, and 32" above the floor			
Coat hook is 54" high			
Toilet			
18" from center to nearest side wall			
42" minimum clear space from center to farthest wall or fixture			
Top of seat 17"-19" above the floor			
Grab Bars			
On back and side wall closest to toilet			
1½" diameter			
1½" clearance to wall			
Located 30" above and parallel to the floor			
Acid-etched or roughened surface			
42" long			
Fixtures			
Toilet paper dispenser is 24" above floor			
One mirror set a maximum 38" to bottom (if tilted, 42")			
Dispensers (towel, soap, etc) at least one of each a maximum 42" above the floor			

Notes

Location

FLOORS, DRINKING FOUNTAINS, TELEPHONES N/A			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Floors			
Non-slip surface			
Carpeting is high-density, low pile, non-absorbent, stretched taut, securely anchored			
Corridor width minimum is 3 ft			
Objects (signs, ceiling lights, fixtures) can only protrude 4" into the path of travel from a height of 27" to 80" above the floor			
Drinking Fountains			
Spouts no higher than 36" from floor to outlet			
Hand operated push button or level controls			
Spouts located near front with stream of water as parallel to front as possible			
If recessed, recess a minimum 30" width, and no deeper than depth of fountain			
If no clear knee space underneath, clear floor space 30" x 48" to allow parallel approach			
Telephones			
Highest operating part a maximum 54" above the floor			
Access within 12" of phone, 30" high by 30" wide			
Adjustable volume control on headset so identified			
SIGNS, SIGNALS, AND SWITCHES			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Switches, Controls and Signs			
Switches and controls for light, heat, ventilation, windows, fire alarms, thermostats, etc, must be a minimum of 36" and a maximum of 48" above the floor for a forward reach, a maximum of 54" for a side reach			
Electrical outlets centered no lower than 18" above the floor			
Warning signals must be visual as well as audible			
Signs			
Mounting height must be 60" to centerline of the sign			
Within 18" of door jamb or recessed			
Letters and numbers at least 1/4" high			
Letters and numbers raised .03"			
Letters and numbers contrast with the background color			

Notes

Location

SWIMMING POOLS – accessibility can be via ramp, lifting device, or transfer area NIA			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Ramp at least 34" wide with a non-slip surface extending into the shallow end, slope not exceeding 1:6 with handrails on both sides			
Lifting device			
Transfer area 18" above the path of travel and a minimum of 18" wide			
Unobstructed path of travel not less than 48" wide around pool			
Non-slip surface			

Location

SHOWER ROOMS - Showers must accommodate both wheel-in and transfer use NIA			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Stalls 36" by 60" minimum, with a 36" door opening			
Floors are pitched to drain the stall at the corner farthest from entrance			
Floors are non-slip surface			
Controls operate by a single lever with a pressure balance mixing valve			
Controls are located on the center wall adjacent to the hinged seat			
Shower heads attached to a flexible metal hose			
Shower heads attached to wall mounting adjustable from 42" to 72" above the floor			
Seat is hinged and padded and at least 16" deep, folds upward, securely attached to side wall, height is 18" to the top of the seat, and at least 24" long			
Soap trays without handhold features unless they can support 250 pounds			
2 grab bars are provided, one 30" and one 48" long, or one continuous L shaped bar			
Grab bars are placed horizontally at 36" above the floor line			

Location

PICNICKING NIA			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
A minimum of 5% of the total tables must be accessible with clear space under the table top not less than 30" wide and 19" deep per seating space and not less than 27" clear from the ground to the underside of the table. An additional 29" clear space (totaling 48") must extend beyond the 19" clear space under the table to provide access			
For tables without toe clearance, the knee space under the table must be at least 28" high, 30" wide and 24" deep.			
Top of table no higher than 32" above ground			
Surface of the clear ground space under and around the table must be stable, firm and slip-resistant, and evenly graded with a maximum slope of 2% in all directions			
Accessible tables, grills and fire rings must have clear ground space of at least 36" around the perimeter			

Facility Inventory

Location: Queen Sewell Cove - Cherry St

ACTIVITY	EQUIPMENT	NOTES
Picnic Facilities N/A	Tables & Benches	Located adjacent to accessible paths
		Access to Open Spaces
		Back and Arm Rests
		Adequate number
	Grills	Height of Cooking Surface
Trash Cans	Picnic Shelters	Located adjacent to accessible paths
		Located adjacent to accessible paths
		Located near accessible water fountains, trash can, restroom, parking, etc.
Trails N/A		Surface material
		Dimensions
		Rails
		Signage (for visually impaired)
Swimming Facilities	Pools N/A	Entrance
		Location from accessible parking
	Beaches	Safety features i.e. warning for visually impaired
		Location from accessible path into water No path
		Handrails No
Play Areas (tot lots)	All Play Equipment i.e. swings slides	Location from accessible parking Yes
		Shade provided Yes - trees
Game Areas: *ballfield *basketball *tennis N/A	Access Routes	Same experience provided to all Yes
		Located adjacent to accessible paths No
	Equipment	Enough space between equipment for wheelchair Yes
Boat Docks N/A	Access Routes	Located adjacent to accessible paths
		Berm cuts onto courts
Fishing Facilities	Access Routes	Height
		Dimensions
	Equipment	Spectator Seating
		Located adjacent to accessible paths No path
		Handrails No
Programming N/A	Are special programs at your facilities accessible?	Arm Rests No
		Bait Shelves No
		Handrails No
		Fish Cleaning Tables No
		Learn-to-Swim
Services and Technical Assistance N/A		Guided Hikes
		Interpretive Programs
Information available in alternative formats i.e. for visually impaired		Process to request interpretive services (i.e. sign language interpreter) for meetings

Location:

PARKING			
<i>Total Spaces</i>	<i>Required Accessible Spaces</i>		
Up to 25	1 space		
26-50	2 spaces		
51-75	3 spaces		
76-100	4 spaces		
101-150	5 spaces		
151-200	6 spaces		
201-300	7 spaces		
301-400	8 spaces		
401-500	9 spaces		
<i>Specification for Accessible Spaces</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Accessible space located closest to accessible entrance	✓		
Where spaces cannot be located within 200 ft of accessible entrance, drop-off area is provided within 100 ft.	✓		
Minimum width of 13 ft includes 8 ft space plus 5 ft access aisle		✓	
Van space – minimum of 1 van space for every accessible space, 8 ft wide plus 8 ft aisle. Alternative is to make all accessible spaces 11 ft wide with 5 ft aisle.		✓	
Sign with international symbol of accessibility at each space or pair of spaces	✓		
Sign minimum 5 ft, maximum 8 ft to top of sign	✓		
Surface evenly paved or hard-packed (no cracks)	✓		
Surface slope less than 1:20, 5%	✓		
Curbscut to pathway from parking lot at each space or pair of spaces, if sidewalk (curb) is present	N/A		No curb or path
Curbscut is a minimum width of 3 ft, excluding sloped sides, has sloped sides, all slopes not to exceed 1:12, and textured or painted yellow			
RAMPS			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Slope Maximum 1:12			
Minimum width 4 ft between handrails			
Handrails on both sides if ramp is longer than 6 ft			
Handrails at 34" and 19" from ramp surface			
Handrails extend 12" beyond top and bottom			
Handgrip oval or round			
Handgrip smooth surface			
Handgrip diameter between 1 1/4" and 2"			
Clearance of 1 1/2" between wall and wall rail			
Non-slip surface			
Level platforms (4ft x 4 ft) at every 30 ft, at top, at bottom, at change of direction			

Notes

Location

SITE ACCESS, PATH OF TRAVEL, ENTRANCES			
<i>Specification</i>	Yes	No	<i>Comments/Transition Notes</i>
Site Access			
Accessible path of travel from passenger disembarking area and parking area to accessible entrance	✓		Parking space is next to beach
Disembarking area at accessible entrance	✓		
Surface evenly paved or hard-packed	✓		
No ponding of water	✓		
Path of Travel			
Path does not require the use of stairs	✓		
Path is stable, firm and slip resistant		✓	sand
3 ft wide minimum	✓		
Slope maximum 1:20 (5%) and maximum cross pitch is 2% (1:50).	✓		
Continuous common surface, no changes in level greater than 1/2 inch	✓		
Any objects protruding onto the pathway must be detected by a person with a visual disability using a cane	✓		
Objects protruding more than 4" from the wall must be within 27" of the ground, or higher than 80"			NIA
Curb on the pathway must have curb cuts at drives, parking and drop-offs			
Entrances NIA			
Primary public entrances accessible to person using wheelchair, must be signed, gotten to independently, and <i>not</i> be the service entrance			
Level space extending 5 ft. from the door, interior and exterior of entrance doors			
Minimum 32" clear width opening (i.e. 36" door with standard hinge)			
At least 18" clear floor area on latch, pull side of door			
Door handle no higher than 48" and operable with a closed fist			
Vestibule is 4 ft plus the width of the door swinging into the space			
Entrance(s) on a level that makes elevators accessible			
Door mats less than 1/2" thick are securely fastened			
Door mats more than 1/2" thick are recessed			
Grates in path of travel have openings of 1/2" maximum			
Signs at non-accessible entrance(s) indicate direction to accessible entrance			
Emergency egress – alarms with flashing lights and audible signals, sufficiently lighted			

Notes

Location

STAIRS and DOORS NIA			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Stairs			
No open risers			
Nosings not projecting			
Treads no less than 11" wide			
Handrails on both sides			
Handrails 34"-38" above tread			
Handrail extends a minimum of 1 ft beyond top and bottom riser (if no safety hazard and space permits)			
Handgrip oval or round			
Handgrip has a smooth surface			
Handgrip diameter between 1¼" and 1½"			
1½" clearance between wall and handrail			
Doors			
Minimum 32" clear opening			
At least 18" clear floor space on pull side of door			
Closing speed minimum 3 seconds to within 3" of the latch			
Maximum pressure 5 pounds interior doors			
Threshold maximum ½" high, beveled on both sides			
Hardware operable with a closed fist (no conventional door knobs or thumb latch devices)			
Hardware minimum 36", maximum 48" above the floor			
Clear, level floor space extends out 5 ft from both sides of the door			
Door adjacent to revolving door is accessible and unlocked			
Doors opening into hazardous area have hardware that is knurled or roughened			

Notes

Location

NHA

RESTROOMS – also see Doors and Vestibules			
Specification	Yes	No	Comments/Transition Notes
5 ft turning space measured 12" from the floor			
At least one Sink:			
Clear floor space of 30" by 48" to allow a forward approach			
Mounted without pedestal or legs, height 34" to top of rim			
Extends at least 22" from the wall			
Open knee space a minimum 19" deep, 30" width, and 27" high			
Cover exposed pipes with insulation			
Faucets operable with closed fist (lever or spring activated handle)			
At least one Stall:			
Accessible to person using wheelchair at 60" wide by 72" deep			
Stall door is 36" wide			
Stall door swings out			
Stall door is self closing			
Stall door has a pull latch			
Lock on stall door is operable with a closed fist, and 32" above the floor			
Coat hook is 54" high			
Toilet			
18" from center to nearest side wall			
42" minimum clear space from center to farthest wall or fixture			
Top of seat 17"-19" above the floor			
Grab Bars			
On back and side wall closest to toilet			
1½" diameter			
1½" clearance to wall			
Located 30" above and parallel to the floor			
Acid-etched or roughened surface			
42" long			
Fixtures			
Toilet paper dispenser is 24" above floor			
One mirror set a maximum 38" to bottom (if tilted, 42")			
Dispensers (towel, soap, etc) at least one of each a maximum 42" above the floor			

Notes

Location

NIA

FLOORS, DRINKING FOUNTAINS, TELEPHONES			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Floors			
Non-slip surface			
Carpeting is high-density, low pile, non-absorbent, stretched taut, securely anchored			
Corridor width minimum is 3 ft			
Objects (signs, ceiling lights, fixtures) can only protrude 4" into the path of travel from a height of 27" to 80" above the floor			
Drinking Fountains			
Spouts no higher than 36" from floor to outlet			
Hand operated push button or level controls			
Spouts located near front with stream of water as parallel to front as possible			
If recessed, recess a minimum 30" width, and no deeper than depth of fountain			
If no clear knee space underneath, clear floor space 30" x 48" to allow parallel approach			
Telephones			
Highest operating part a maximum 54" above the floor			
Access within 12" of phone, 30" high by 30" wide			
Adjustable volume control on headset so identified			
SIGNS, SIGNALS, AND SWITCHES			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Switches, Controls and Signs			
Switches and controls for light, heat, ventilation, windows, fire alarms, thermostats, etc, must be a minimum of 36" and a maximum of 48" above the floor for a forward reach, a maximum of 54" for a side reach			
Electrical outlets centered no lower than 18" above the floor			
Warning signals must be visual as well as audible			
Signs			
Mounting height must be 60" to centerline of the sign			
Within 18" of door jamb or recessed			
Letters and numbers a t least 1¼" high			
Letters and numbers raised .03"			
Letters and numbers contrast with the background color			

Notes

Location

SWIMMING POOLS – accessibility can be via ramp, lifting device, or transfer area NIA			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Ramp at least 34" wide with a non-slip surface extending into the shallow end, slope not exceeding 1:6 with handrails on both sides			
Lifting device			
Transfer area 18" above the path of travel and a minimum of 18" wide			
Unobstructed path of travel not less than 48" wide around pool			
Non-slip surface			

Location

SHOWER ROOMS - Showers must accommodate both wheel-in and transfer use NIA			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
Stalls 36" by 60" minimum, with a 36" door opening			
Floors are pitched to drain the stall at the corner farthest from entrance			
Floors are non-slip surface			
Controls operate by a single lever with a pressure balance mixing valve			
Controls are located on the center wall adjacent to the hinged seat			
Shower heads attached to a flexible metal hose			
Shower heads attached to wall mounting adjustable from 42" to 72" above the floor			
Seat is hinged and padded and at least 16" deep, folds upward, securely attached to side wall, height is 18" to the top of the seat, and at least 24" long			
Soap trays without handhold features unless they can support 250 pounds			
2 grab bars are provided, one 30" and one 48" long, or one continuous L shaped bar			
Grab bars are placed horizontally at 36" above the floor line			

Location

PICNICKING NIA			
<i>Specification</i>	<i>Yes</i>	<i>No</i>	<i>Comments/Transition Notes</i>
A minimum of 5% of the total tables must be accessible with clear space under the table top not less than 30" wide and 19" deep per seating space and not less than 27" clear from the ground to the underside of the table. An additional 29" clear space (totaling 48") must extend beyond the 19" clear space under the table to provide access			
For tables without toe clearance, the knee space under the table must be at least 28" high, 30" wide and 24" deep.			
Top of table no higher than 32" above ground			
Surface of the clear ground space under and around the table must be stable, firm and slip-resistant, and evenly graded with a maximum slope of 2% in all directions			
Accessible tables, grills and fire rings must have clear ground space of at least 36" around the perimeter			

APPENDIX G

Chapter 61 Lands

Chapter 61 Lands (January 2018)

Parcel ID	Location	State Class	Code	Description	Acres
27.0-52-0	0 COUNTY RD	7100	710F	CRANBERRY BOG	14.00
		7160	716F	NEC RELATED LAND	0.40
		7200	720F	NON-PROD. LAND	14.00
				Non-Chapter	0.00
44.0-32-1	45 VALLEY FARM RD	7160	716F	NEC RELATED LAND	4.80
				Non-Chapter	0.00
48.0-21-0	0 COUNTY RD	7100	710F	CRANBERRY BOG	1.70
				Non-Chapter	0.00
48.0-21-1	45 VALLEY FARM RD	7120	712F	TRUCK CROPS - VEG	0.92
		7100	710F	CRANBERRY BOG	4.00
		7200	720F	NON-PROD. LAND	4.03
				Non-Chapter	0.00
24.0-38-0	0 MONUMENT NECK RD	7100	710F	CRANBERRY BOG	1.20
		7200	720F	NON-PROD. LAND	1.20
				Non-Chapter	0.00
27.0-92-0	0 OLD DAM RD	7100	710F	CRANBERRY BOG	2.62
		7200	720F	NON-PROD. LAND	2.62
				Non-Chapter	0.00
24.0-37-0	0 MONUMENT NECK RD	7100	710F	CRANBERRY BOG	5.05
		7200	720F	NON-PROD. LAND	5.05
				Non-Chapter	0.00
26.0-19-0	91 OLD DAM RD	7100	710F	CRANBERRY BOG	7.77
				Non-Chapter	1.92
26.0-20-0	91 OLD DAM RD	7100	710F	CRANBERRY BOG	1.38
		7200	720F	NON-PROD. LAND	7.22
				Non-Chapter	0.00
27.0-1-0	0 OLD DAM RD	7100	710F	CRANBERRY BOG	1.00
		7200	720F	NON-PROD. LAND	0.21
				Non-Chapter	0.00
27.0-2-0	0 COUNTY RD	7200	720F	NON-PROD. LAND	0.63
				Non-Chapter	0.00
27.0-32-0	105 OLD DAM RD	7100	710F	CRANBERRY BOG	1.90
				Non-Chapter	1.85
27.0-93-0	0 BACK RIVER RD	7100	710F	CRANBERRY BOG	1.98
				Non-Chapter	0.00
27.0-94-0	0 OLD DAM RD	7100	710F	CRANBERRY BOG	1.90
		7200	720F	NON-PROD. LAND	1.98

Parcel ID	Location	State Class	Code	Description	Acres
21.0-9-0	0 SANDWICH RD	6010	601G	PROD WDLND CH61	0.92
		6010	601G	PROD WDLND CH61	6.43
		6010	601G	PROD WDLND CH61 Non-Chapter	15.95 0.00
47.0-14-0	1167 COUNTY RD	6010	601G	PROD WDLND CH61 Non-Chapter	0.90 2.90
47.0-41-0	1121 COUNTY RD	6010	601G	PROD WDLND CH61 Non-Chapter	0.62 4.06
47.0-44-0	0 COUNTY RD	6010	601G	PROD WDLND CH61 Non-Chapter	12.30 0.00
48.0-89-0	0 WARD SWIFT RD	6010	601G	PROD WDLND CH61 Non-Chapter	0.87 0.00
15.0-1-0	201 BOURNE DALE RD	7170	717F	PRODUCTIVE WOODLAND Non-Chapter	15.21 1.84
15.0-181-0	0 BOURNE DALE RD	7170	717F	PRODUCTIVE WOODLAND Non-Chapter	63.39 0.00
7.0-48-0	274 WILLISTON RD	8030	803	NATURE STUDY	0.92
		8030	803	NATURE STUDY Non-Chapter	12.66 0.00
43.3-69-0	240 CIRCUIT AVE	7100	710F	CRANBERRY BOG	3.71
		7160	716F	NEC RELATED LAND Non-Chapter	0.89 0.00
47.0-19-0	0 COUNTY RD	7100	710F	CRANBERRY BOG Non-Chapter	2.66 0.00
48.0-1-0	0 VALLEY FARM RD	7160	716F	NEC RELATED LAND Non-Chapter	1.20 0.00
48.0-2-0	1068 COUNTY RD	7160	716F	NEC RELATED LAND Non-Chapter	29.35 0.00
48.0-22-0	0 OLD COUNTY RD	7100	710F	CRANBERRY BOG Non-Chapter	0.94 0.00
48.0-23-0	0 COUNTY RD	7100	710F	CRANBERRY BOG Non-Chapter	3.88 0.00
48.0-24-0	0 COUNTY RD	7100	710F	CRANBERRY BOG Non-Chapter	4.56 0.00
48.0-39-0	0 COUNTY RD	7160	716F	NEC RELATED LAND Non-Chapter	0.73 0.00
48.0-40-0	0 COUNTY RD	7100	710F	CRANBERRY BOG Non-Chapter	1.65 0.00

Parcel ID	Location	State Class	Code	Description	Acres
48.0-41-0	0 ROUTE 28A	7100	710F	CRANBERRY BOG Non-Chapter	3.55 0.00
48.0-44-0	1023 COUNTY RD	7100	710F	CRANBERRY BOG Non-Chapter	14.95 0.92
48.0-48-2	0 ROUTE 28A	7160	716F	NEC RELATED LAND Non-Chapter	1.90 0.00
48.0-51-0	39 WARD SWIFT RD	7100	710F	CRANBERRY BOG Non-Chapter	32.37 0.46
48.0-77-0	0 COUNTY RD	7100	710F	CRANBERRY BOG Non-Chapter	2.00 0.00
48.0-80-0	0 VALLEY FARM RD	7100	710F	CRANBERRY BOG Non-Chapter	1.00 0.00
52.0-6-0	0 ROUTE 28A	7160	716F	NEC RELATED LAND Non-Chapter	1.85 0.00
48.0-12-0	1030 COUNTY RD	7100	710F	CRANBERRY BOG Non-Chapter	7.66 1.84
48.0-7-1	0 COUNTY RD	7160	716F	NEC RELATED LAND Non-Chapter	0.50 0.00
48.0-49-0	27 WARD SWIFT RD	7100	710F	CRANBERRY BOG Non-Chapter	6.68 0.00
48.0-68-0	14 WARD SWIFT RD	7200	720F	NON-PROD. LAND Non-Chapter	2.34 0.00
48.0-18-0	0 COUNTY RD	7160	716F	NEC RELATED LAND Non-Chapter	0.14 0.00
48.0-52-0	0 COUNTY RD	7160	716F	NEC RELATED LAND Non-Chapter	1.00 0.00
48.0-53-0	0 COUNTY RD	7160	716F	NEC RELATED LAND Non-Chapter	1.47 0.00
43.3-51-0	33 WABASH AVE	7160	716F	NEC RELATED LAND Non-Chapter	0.72 0.00
48.0-15-0	1068 COUNTY RD	7160	716F	NEC RELATED LAND Non-Chapter	0.49 0.00
14.0-32-0	854 HEAD OF THE BAY RD	6010 6010	601G 601G	PROD WDLND CH61 PROD WDLND CH61 Non-Chapter	1.84 1.77 1.84
15.0-32-1	430 HEAD OF THE BAY RD	7170 7170 7170	717F 717F 717F	PRODUCTIVE WOODLAND PRODUCTIVE WOODLAND PRODUCTIVE WOODLAND Non-Chapter	1.84 1.84 0.13 0.00

Parcel ID	Location	State Class	Code	Description	Acres
10.0-9-0	0 BOURNEDEALE RD	7200	720F	NON-PROD. LAND	1.84
		7200	720F	NON-PROD. LAND	1.94
		7170	717F	PRODUCTIVE WOODLAND Non-Chapter	112.60 0.62
9.0-76-0	0 BOURNEDEALE RD	7170	717F	PRODUCTIVE WOODLAND	18.13
		7180	718F	PASTURE Non-Chapter	0.12 0.25
9.0-75-0	0 PLYMOUTH LN	7180	718F	PASTURE	0.60
		7170	717F	PRODUCTIVE WOODLAND Non-Chapter	16.48 0.00
9.0-77-0	0 BOURNEDEALE RD	7170	717F	PRODUCTIVE WOODLAND Non-Chapter	16.62 0.00
14.0-40-1	74 OLD HEAD OF THE BAY RD	7170	717F	PRODUCTIVE WOODLAND	1.84
		6010	601G	PROD WDLND CH61	4.97
				Non-Chapter	2.68
14.0-40-2	0 HEAD OF THE BAY RD	7160	716F	NEC RELATED LAND Non-Chapter	0.68 0.00
15.0-1-1	400 HEAD OF THE BAY RD	7160	716F	NEC RELATED LAND	2.97
		7180	718F	PASTURE	3.67
		7170	717F	PRODUCTIVE WOODLAND	14.74
		7180	718F	PASTURE Non-Chapter	0.95 3.03
15.0-180-0	200 BOURNEDEALE RD	7170	717F	PRODUCTIVE WOODLAND	0.23
		7170	717F	PRODUCTIVE WOODLAND Non-Chapter	13.82 0.00
15.0-3-2	0 HEAD OF THE BAY RD	7170	717F	PRODUCTIVE WOODLAND	1.84
		7180	718F	PASTURE	0.62
		7160	716F	NEC RELATED LAND	0.93
		7200	720F	NON-PROD. LAND	1.71
		7170	717F	PRODUCTIVE WOODLAND Non-Chapter	14.98 0.00
16.0-40-0	36 HEATHER HILL RD	7200	720F	NON-PROD. LAND Non-Chapter	0.69 0.00
9.0-20-0	0 DRY CEDAR SWAMP RD	7200	720F	NON-PROD. LAND	1.64
		7170	717F	PRODUCTIVE WOODLAND Non-Chapter	11.19 0.00
9.0-78-0	0 BOURNEDEALE RD	7170	717F	PRODUCTIVE WOODLAND Non-Chapter	14.39 0.00
9.0-78-1	0 BOURNEDEALE RD	7170	717F	PRODUCTIVE WOODLAND Non-Chapter	0.29 0.00

Parcel ID	Location	State Class	Code	Description	Acres
9.0-78-2	0 BOURNE DALE RD	7170	717F	PRODUCTIVE WOODLAND Non-Chapter	9.09 0.00
42.0-57-0	293 WINGS NECK RD	8010 8010	801 801	61B CHAPTER 61B CHAPTER Non-Chapter	1.84 1.61 0.00
42.0-96-0	0 SOUTH RD	8010	801	61B CHAPTER Non-Chapter	1.65 0.00
14.0-56-1	590 HEAD OF THE BAY RD	7160	716F	NEC RELATED LAND Non-Chapter	1.27 0.00
14.0-56-0	590 HEAD OF THE BAY RD	7160	716F	NEC RELATED LAND Non-Chapter	7.16 0.00
14.0-34-0	720 HEAD OF THE BAY RD	7100 7160	710F 716F	CRANBERRY BOG NEC RELATED LAND Non-Chapter	22.00 20.00 0.00
28.0-7-0	0 MACARTHUR BLVD	8140 8140	814 814	TARGE SHOOTING TARGE SHOOTING Non-Chapter	0.92 7.08 0.00
28.0-8-0	0 MACARTHUR BLVD	8140 8140	814 814	TARGE SHOOTING TARGE SHOOTING Non-Chapter	0.46 8.07 0.00
28.0-9-0	0 MACARTHUR BLVD	8140 8140	814 814	TARGE SHOOTING TARGE SHOOTING Non-Chapter	0.46 16.24 0.00
28.0-10-0	0 MACARTHUR BLVD	8140 8140	814 814	TARGE SHOOTING TARGE SHOOTING Non-Chapter	0.46 3.58 0.00
28.0-11-0	0 MACARTHUR BLVD	8140 8140	814 814	TARGE SHOOTING TARGE SHOOTING Non-Chapter	0.46 10.54 0.00
28.0-12-0	0 MACARTHUR BLVD	8140	814	TARGE SHOOTING Non-Chapter Total	13.03 0.46 13.49
7.0-11-3	5 CUNNINGHAM RD	7190	719F	NURSERIES Non-Chapter	0.76 0.00
7.0-11-4	1 CUNNINGHAM RD	7190	719F	NURSERIES Non-Chapter	3.60 0.00
7.0-15-0	181 OLD PLYMOUTH RD	7190	719F	NURSERIES Non-Chapter	0.50 1.50

Parcel ID	Location	State Class	Code	Description	Acres	
43.0-10-0	24 CLUBHOUSE DR	8050	805	GOLFING	47.00	
		8050	805	GOLFING	48.50	
		8050	805	GOLFING	18.00	
				Non-Chapter	5.00	
43.0-11-0	0 CLUBHOUSE DR	8050	805	GOLFING	1.84	
		8050	805	GOLFING	16.16	
				Non-Chapter	0.00	
43.0-56-0	0 CLUBHOUSE DR	8050	805	GOLFING	0.92	
		8050	805	GOLFING	0.62	
				Non-Chapter	0.00	
43.0-56-1	0 CLUBHOUSE DR	8050	805	GOLFING	0.24	
				Non-Chapter	0.00	
43.0-56-2	0 CLUBHOUSE DR	8050	805	GOLFING	0.45	
				Non-Chapter	0.00	
43.0-57-0	0 CLUBHOUSE DR	8050	805	GOLFING	0.92	
		8050	805	GOLFING	0.92	
		8050	805	GOLFING	2.28	
				Non-Chapter	0.00	
				Total		4.12
50.0-1-0	0 SCRAGGY NECK RD	6010	601G	PROD WDLND CH61	0.92	
		6010	601G	PROD WDLND CH61	78.08	
				Non-Chapter	0.00	
38.1-58-0	0 TAHANTO RD	8110	811	SWIMMING	0.92	
		8110	811	SWIMMING	0.78	
				Non-Chapter	0.00	
38.1-59-0	0 TAHANTO RD	8110	811	SWIMMING	0.92	
		8110	811	SWIMMING	3.20	
				Non-Chapter	0.00	
20.0-30-0	0 NIGHTINGALE POND RD	7100	710F	CRANBERRY BOG	9.00	
		7160	716F	NEC RELATED LAND	4.74	
				Non-Chapter	0.00	
16.0-4-0	0 SCENIC HIGHWAY	7100	710F	CRANBERRY BOG	1.07	
		7160	716F	NEC RELATED LAND	4.00	
		7170	717F	PRODUCTIVE WOODLAND	1.99	
				Non-Chapter	0.00	
					1,032.67	